




CS-RZ28BKA

New Chassis
New Indoor Design

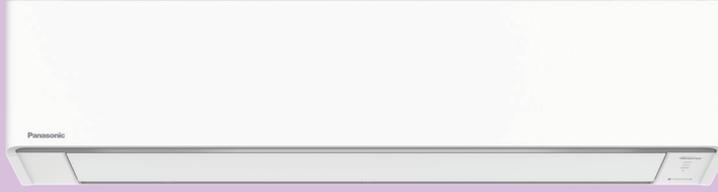

Wireless Remote Control




7 Effects of unique nanoe™ X

Inhibits 5 types pollutants and deodorises						Moisturises
Odours	Bacteria & Viruses	Mould	Allergens	Pollen	Hazardous Substances	Skin & Hair



Dust collection of PM2.5 with nanoe-G

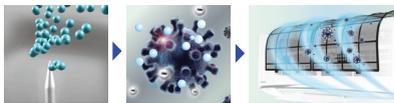

Stay connected and in control anywhere, anytime

Manage at Ease Using Panasonic Comfort Cloud App

Formaldehyde removal filter


The filter removes Formaldehyde up to 99.9%*.

*Test was conducted by SGS Taiwan Ltd., in 1m³ chamber/5 hours.



Humidity sensor: Comfort without Overcooling

Constantly monitors and adjusts relative humidity levels to below 55%, maintaining set temperature to avoid overcooling.

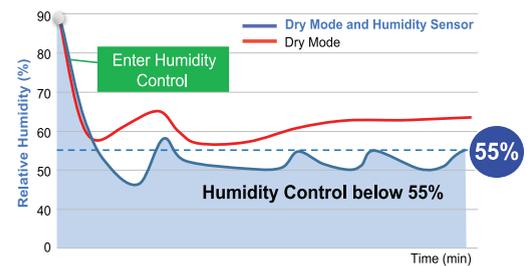


New Easy installation & Servicing

Easy Removal of Front Grille



Front grille removal is now faster than before, from screws to user-friendly slider locks, with just one screw.

Easy Removal of Cross Flow Fan

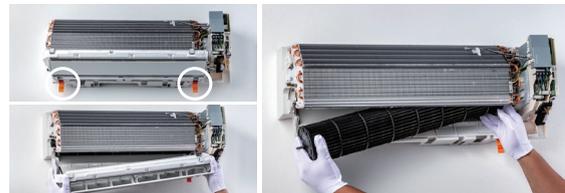

Cross flow fan removal is now faster than before, from 2 screws to 2 clips.

Specifications

Items	Cooling Capacity	Heating Capacity	Power Source	Power Input (Cooling Heating)	Running Current (Cooling Heating)	Air Volume (Cooling Heating)	Noise Level (Sound Pressure Level)		Dimensions		Net Weight		Piping Connection		Pipe Length		EER COP (Cooling Heating)
							Indoor(Hi/Lo) (Cooling Heating)	Outdoor(Hi/Lo) (Cooling Heating)	Indoor	Outdoor	Indoor	Outdoor	Gas Side	Liquid Side	Max. Length	Max. Height	
Indoor Outdoor	kW	kW	Phase V Hz	kW	A	m ³ /min	dB(A)	dB(A)	mm (H/W)	mm (H/W)	kg	kg	O.D. mm (inch)	O.D. mm (inch)	m	m	W/W
CS-RZ28BKA CU-RZ28BKA	7.5	8.6	1φ 220 50	2.14 2.40	9.8 11.0	23.0 23	51 / 38 50 / 38	55 55	295 1,060 249	795 875 320	14	50	15.88 (5/8")	6.35 (1/4")	30	20	3.5 3.58

Rating Conditions

	Cooling	Heating
Inside air temperature	27°C DB/19°C WB	20°C DB/15°C WB
Outside air temperature	35°C DB/24°C WB	7°C DB/6°C WB

Pictures are for reference only. Specifications are subject to change without prior notice.

*Installation inspection or maintenance of the products should be carried out in compliance with the specified restrictions by the agents, suppliers or technicians who have experience in handling mildly flammable refrigerant.
*The installation restriction must be followed.
*The refrigerant used by the air-conditioner is R32 which is a mildly flammable refrigerant. The air-conditioner shall be installed in accordance with recommended minimum installation height and minimum room area as indicated in the user manual.



wallmount04/25



SHUN HING GROUP
信興集團
SINCE 1953

SHUN HING ELECTRIC WORKS & ENGINEERING CO., LTD.



Printed with environmental friendly ink on environmental paper

TEL: 2861 2767 FAX: 2865 6706 Website: www.shew.com.hk