



Building Passion, Building Solutions.

Panasonic Air Conditioning Systems

We face a time in which "quality air" differentiates business. It's a time for Panasonic to fully display its strengths. Our ability to assemble and build superior systems isn't just due to the rich resources we have as a comprehensive electronics manufacturer, but also to Panasonic's 100 years of tradition, where each person thinks and acts on their own initiative while working in a team to reach further heights. We do not compromise. Each of our independent selves is a one stop solution. We face our customers' challenges together with our customers and do all that we can to build effective systems. As a true partner for our customers, we strive to always be at the forefront of business.

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of February_2025.
- Due to printing considerations, actual colours may vary slightly from those shown.
- All graphics are provided solely for the purpose of illustrating a point.



Do not add or replace refrigerant other than the specified type.
Manufacturer is not responsible for damage or deterioration in safety due to usage of other refrigerant.

Authorised Dealer

FSV Mini FSV HK GENERAL_FEBRUARY_2025



Printed with environmental friendly ink on environmental paper

總代理 Sole Agent



信興電工工程有限公司 SHUN HING ELECTRIC WORKS AND ENGINEERING CO., LTD.

辦公室：香港九龍尖沙咀東部麼地道67號半島中心9樓
Office: 9/F, Peninsula Centre, 67 Mody Road, Tsimshatsui East, Kowloon, Hong Kong
電話 Tel: (852) 2861 2767 圖文傳真 Fax: (852) 2865 6706
網址 Website: www.shew.com.hk
電郵 E-mail: shew@shunhinggroup.com



保養及維修 Maintenance and Repair Service

信興機電工程有限公司 SHUN HING ENGINEERING CONTRACTING CO., LTD.

辦公室：香港新界葵涌葵耀街2號信興中心16樓
Office: 16th Floor, Shun Hing Centre, 2 Shing Yiu Street, Kwai Chung, N.T., H.K.
電話 Tel: (852) 2419 8282 圖文傳真 Fax: (852) 2419 8234
網址 Website: www.shecon.com
技術支援 Technical Support: (852) 2116 8286

FSV VRF SYSTEMS 2025/2026



Residential &
Light Commercial Use



Commercial Use



•nanoe[™]X INVERTER

QUALITY AIR FOR LIFE

THE GAME CHANGER




ALL INVERTER


**VRF with Extraordinary Energy-Saving
Performance and Powerful Operation
EER 5.3 (U-8ME2H7)**

A game-changing VRF system delivering energy-saving performance, powerful operation, reliability and comfort surpassing anything previously possible.

It represents a true paradigm shift in air conditioning solutions. Taking quality to the extreme — that's the Panasonic challenge.

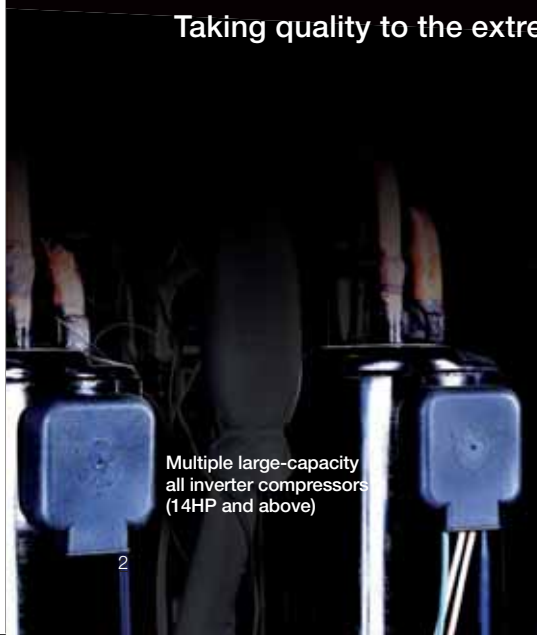

Multiple large-capacity
all inverter compressors
(14HP and above)

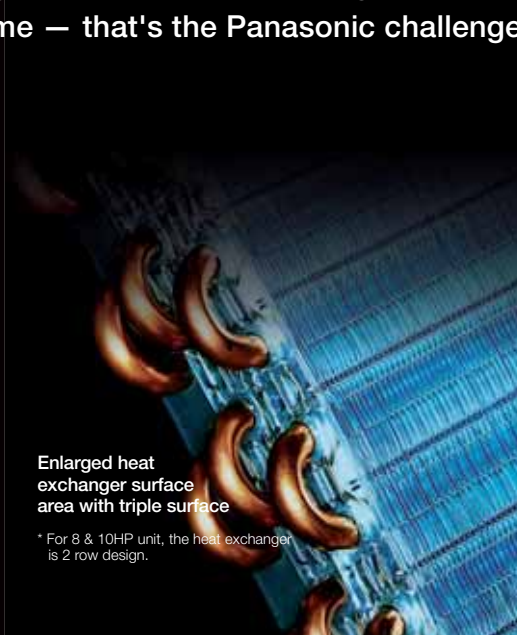

Enlarged heat
exchanger surface
area with triple surface

* For 8 & 10HP unit, the heat exchanger
is 2 row design.



Newly designed curved
air discharge bell mouth
for better aerodynamics



Extraordinary 5.3 EER

In the case of U-8ME 2H7

CONTENTS

02	FSV-EX Introduction	70	Indoor Units	118	Remark for High Static Ducted Series
04	Mini-FSV Introduction	72	FSV Indoor Units Range	120	Panasonic Comfort Cloud
06	FSV-EX Advantages	74	F3 Type / Mid Static Adaptive Ducted	122	FSV Controllers
08	FSV-EX Series / Exclusive Feature 1 Extended Operation Range	78	F2 Type / Mid Static Ducted	125	Individual Control Systems
10	FSV-EX Series / Exclusive Feature 2 Energy-Saving Performance	82	M2 Type / Slim Low Static Ducted	127	Timer Operation
12	FSV-EX Series / Exclusive Feature 3 Oil Management System	84	Z1 Type / Slim Low Static Ducted Twenty Series	128	Centralised Control Systems
14	Panasonic VRF: Top In Comfort	86	E2 Type / High Static Ducted	132	P-AIMS
16	ECONAVI	88	E2 Type / Energy Saving High Fresh Air Ducted	134	T10 Terminal for External Control
18	Exclusive Feature / High-spec Wired Remote Controller	90	E1 Type / High Static Ducted	135	Interfaces for External Control
22	Exclusive Feature / Air Handling Unit Kit	92	K3 Type / Wall Mounted	136	Serial Interface for 3rd Party External Controller
24	Exclusive Feature / CAC Design Support Software	96	K2 Type / Wall Mounted	137	Serial Interface for LonWorks Network
26	FSV Systems	100	U2 Type / 4-Way Cassette	138	FSV Controller External Dimensions
28	2-WAY FSV-EX ME2 Series	104	Y3 Type / 4-Way Mini Cassette	140	VRF Renewal
44	3-WAY FSV-EX MF3 Series	106	L1 Type / 2-Way Cassette	144	A Globally Trusted Air Conditioning Brand
58	2-WAY Mini-FSV LE Series	108	D1 Type / 1-Way Cassette	146	Reliability and Durability
68	nanoe™ X	110	T2 Type / Ceiling Mounted	148	Global Networking of Heating and Cooling Solutions
		112	G1 Type / Floor Console	150	Panasonic VRF Global Project References
		114	P1 Type / Floor Standing		
		116	R1 Type / Concealed Floor Standing		

MINI GAME CHANGER




Mini VRF LE Series

Cooling & Heating Type 8/10 HP [LE1] 4/5/6 HP [LE2]

Mini-FSV with Extraordinary Energy-Saving Performance and High External Static Pressure(35Pa)


High External Static Pressure 35Pa

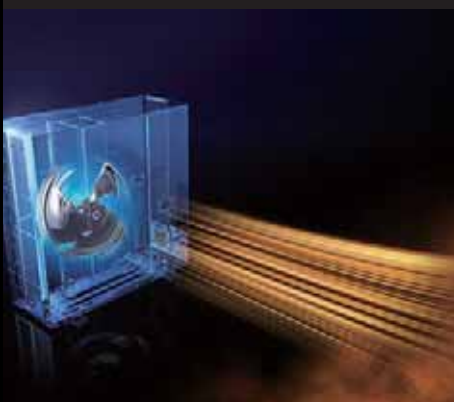

Compact Design



Long Piping Design Length for Greater Design Flexibility

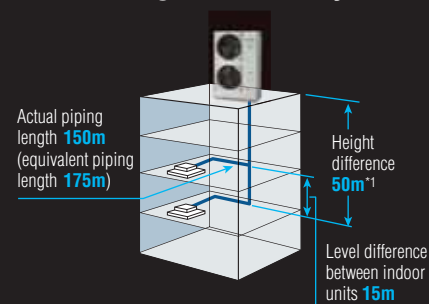

LE1 Max. total piping length: **300m**
LE2 Max. total piping length: **180m**

*1: 40m if the outdoor unit is below the indoor unit.

LE1 Series
4.20^{*}
EER

* In the case of 8HP



LE2 Series
5.08^{*}
EER


* In the case of 4HP

FSV-EX Advantages

The most efficient, powerful and quiet system in Panasonic's history.
There has never been a VRF system like it.
It's the story of a true game changer.


Extraordinary Energy-Saving Performance

The FSV-EX marks a revolutionary step forward in VRF efficiency. A look at the incredible EER value clearly indicates that. What's more, this high EER value is achieved even during part load operation. This shows the extraordinary energy-saving performance the FSV-EX is capable of providing.

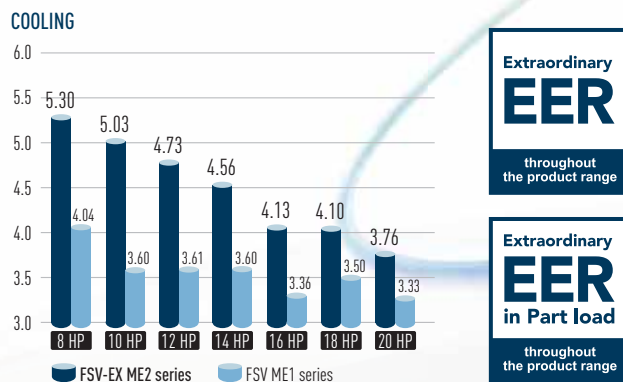


Extended Operation Range Up to 52°C

The FSV-EX can provide cooling even when the outside temperature reaches a maximum of about 52°C. And amazingly, it can still operate at 100% capacity when the outside temperature is as high as 43°C. This high power capability enables reliable operation even under extremely high temperature conditions.

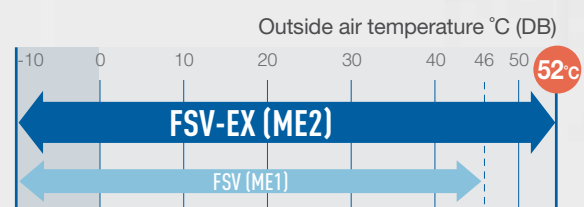

Low-Noise Operation


Numerous technological innovations, including an improved compressor and a newly designed bell mouth and larger fan, have dramatically reduced the outdoor noise level. The result is an even more comfortable building environment.

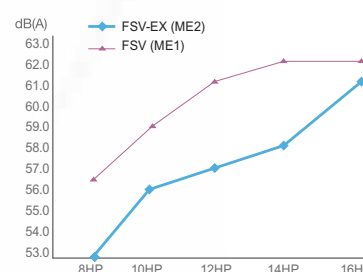

Multiple large-capacity all inverter compressors

(multiple compressors for 14HP and above)

Two independently controlled inverter compressors achieve high efficiency. Redesigned components in the body provide performance improvement especially in the rated cooling condition and EER performance.

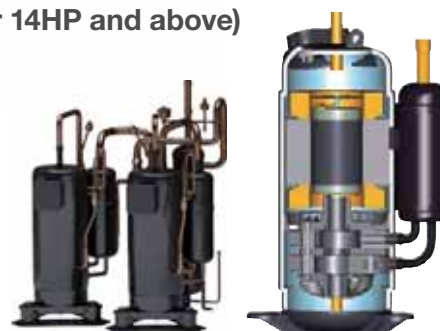

Enlarged heat exchanger surface area with triple surface*

The new heat exchanger features a triple-surface construction. Compared to the divided dual-surface construction in current models, there is no division of space and the area for heat exchange is larger. Also, highly efficient piping pattern increases heat exchange performance by 5%.

* For 8 & 10HP unit, the heat exchanger is 2 row design.





Extended Operation Range up to 52°C

High reliability even under high temperature conditions

Designed to be durable enough to withstand extreme heat, FSV EX ensures reliable cooling operation over an extended operation range up to 52°C.

OPERATING RANGE

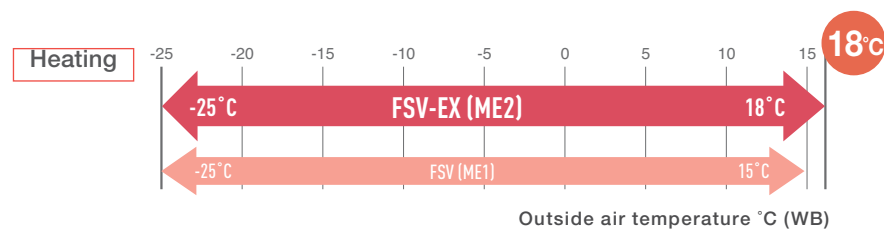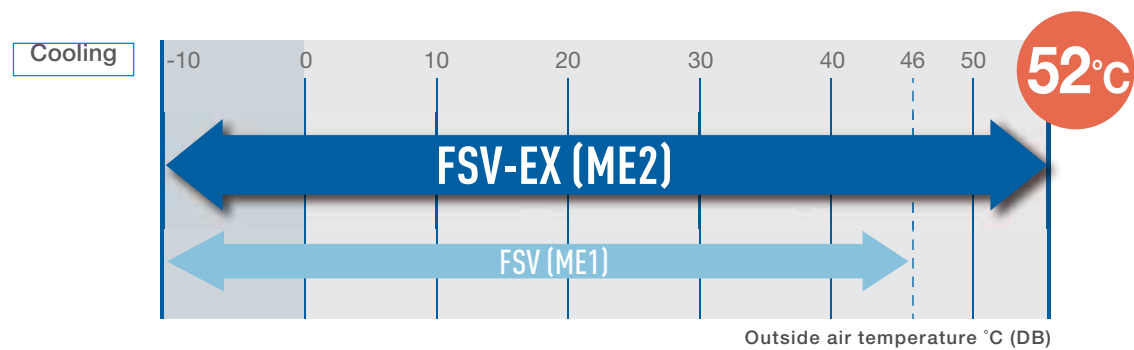




Full-capacity Operation up to 43°C

The FSV-EX can provide cooling even when the outside temperature reaches a maximum of about 52°C. And amazingly, it can still operate at 100% capacity when the outside temperature is as high as 43°C. This high power capability enables reliable operation even under extremely high temperature conditions.

CAPACITY RATIO (COOLING)

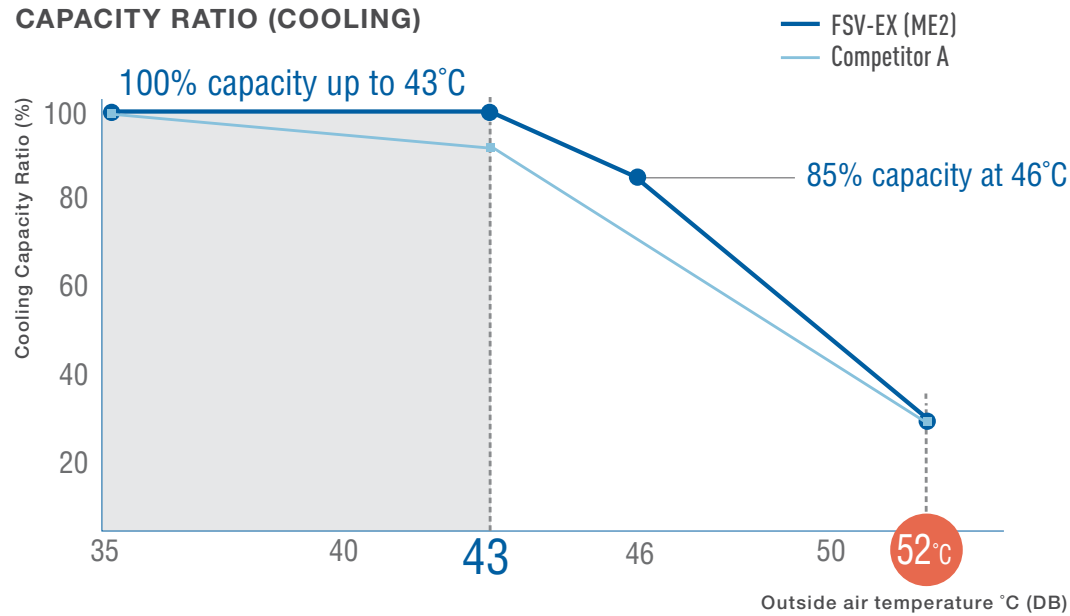

<Test Condition> 12HP model, IU/OU capacity ratio:100%, Indoor Condition:27°C[DB]/19°C[WB]
Competitor A spec is from technical data book.




Extraordinary Energy-Saving Performance

Practical Design for Actual Operation

Panasonic builds air conditioning systems not only with a high EER for rated operation, but also with Seasonal-EER appropriate to the customer's actual environment of use. For instance, with rated operation, outdoor temperature is constant at 35°C, but in reality the outdoor temperature is continuously changing. Consequently, required air conditioning performance also changes. That's why Panasonic implements the following kind of proprietary control.

Rapidly reaches set temperature
→ full-load operation duration minimised

Load increased as required for a given
outdoor temperature increase to
maintain the set temperature

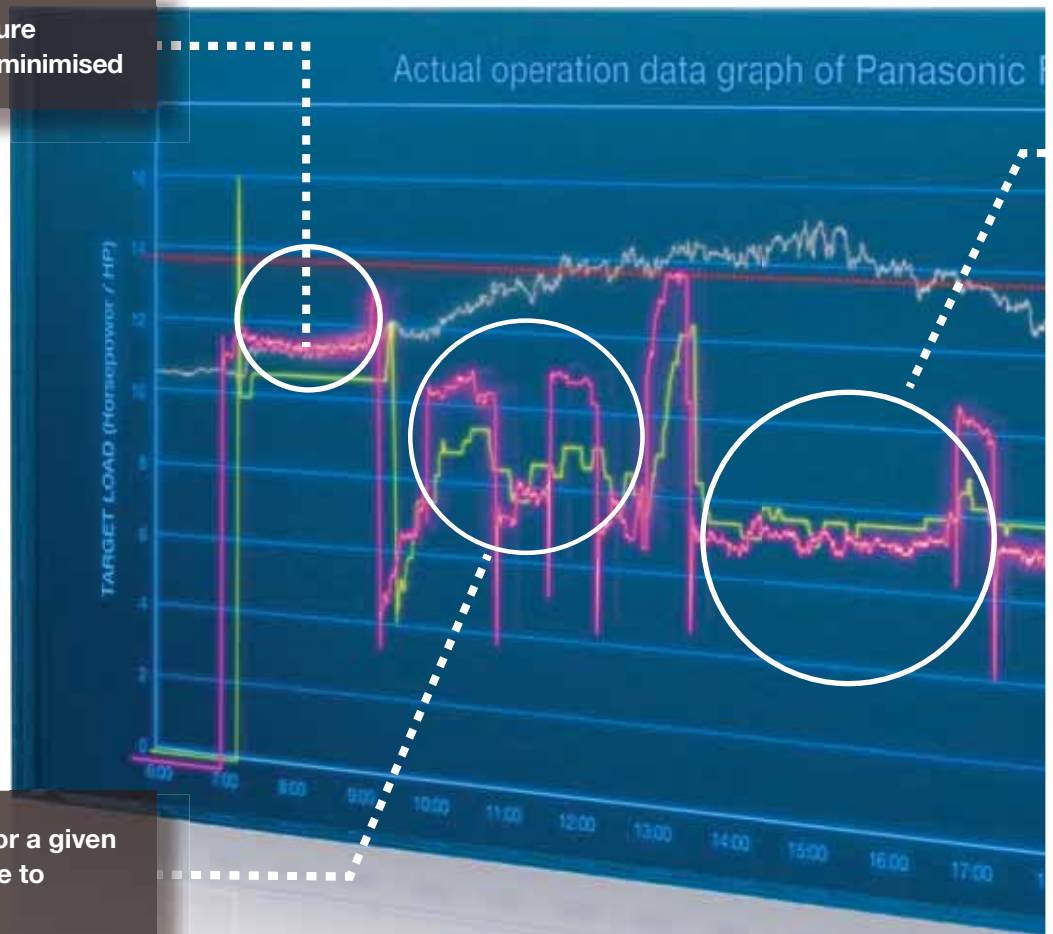


Actual performance data of Panasonic FSV installed in Asia

Simulated conditions

Location: Panasonic building in Malaysia System: One 16HP outdoor unit, 4 cassette-type indoor units

1. Set temperature is rapidly attained; full-load operating time is kept to a minimum.
2. The frequency of forced oil recovery is minimised. The volume of oil within the compressors is monitored precisely by sensors, so forced oil recovery under full-load operation is conducted only when necessary. Since this suppresses noise due to oil recovery, comfort is maintained.
3. Panasonic pursues a high EER, of course, as well as high EER in part load, for energy saving performance under a broad range of loads.

Panasonic's design concept contributes to substantial energy cost reductions.

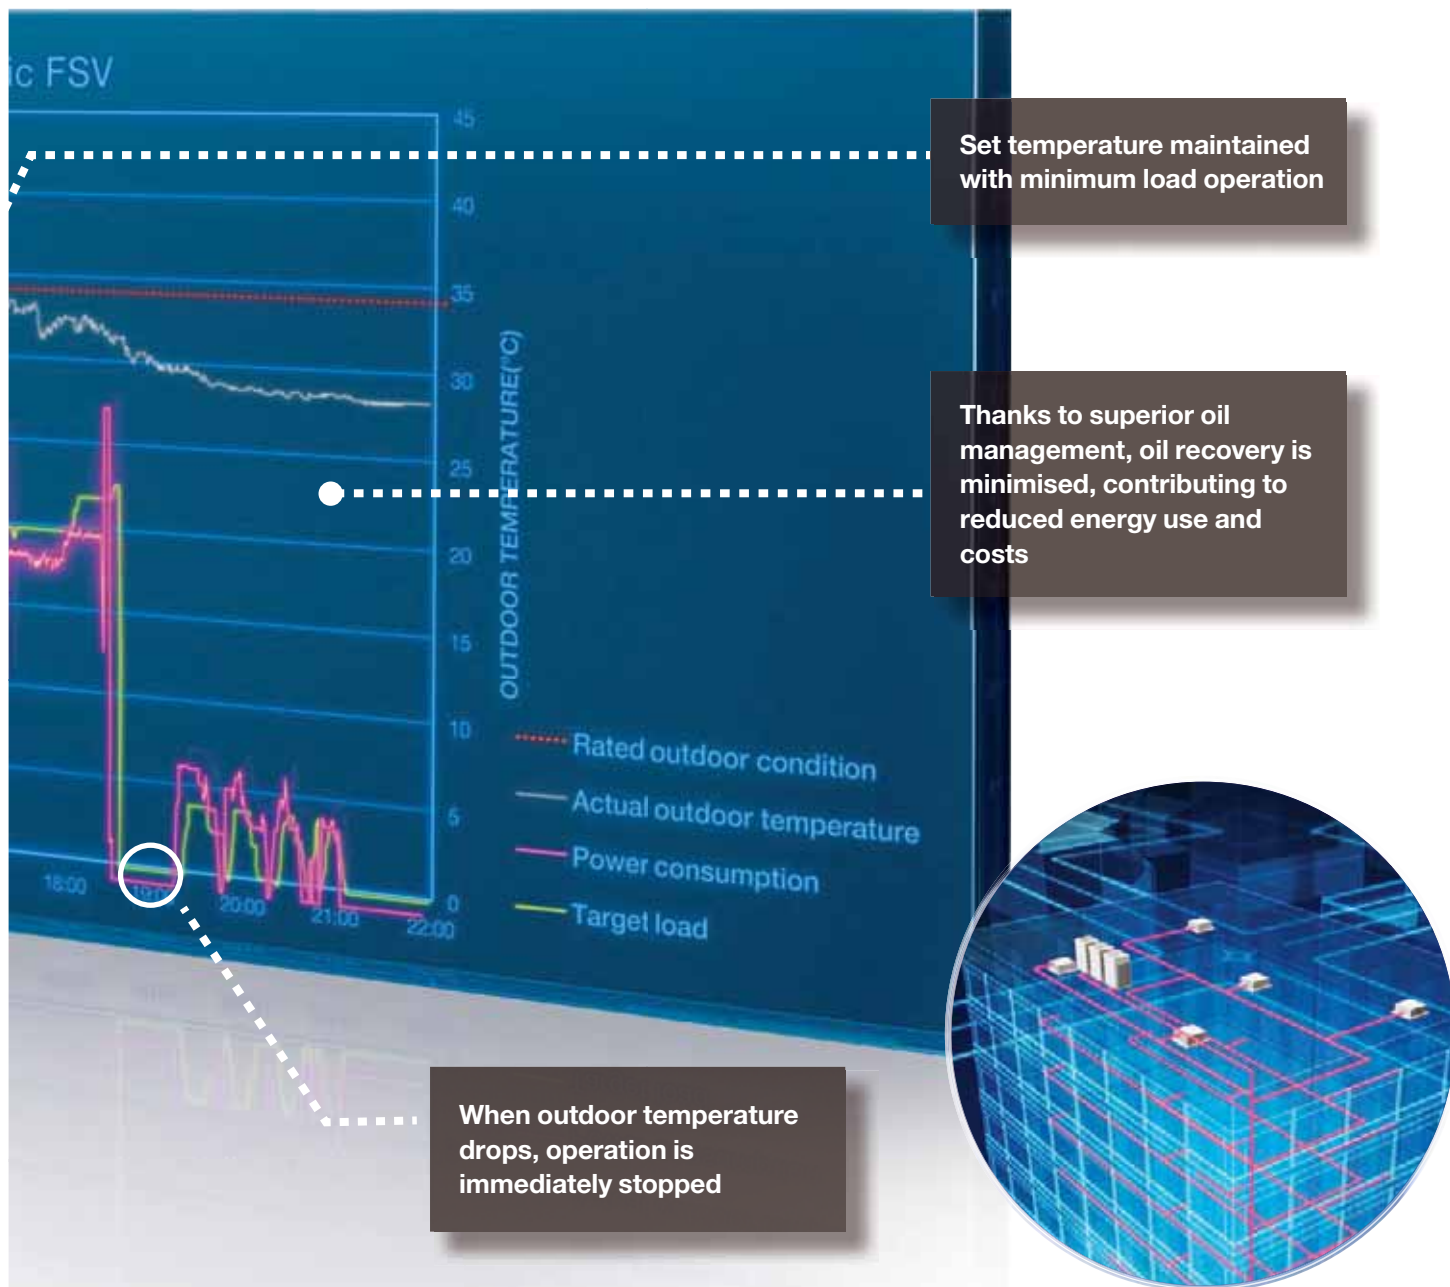

Intelligent 3-stage Oil Management System

In a VRF system, where lengthy piping and a large number of indoor units need to be controlled collectively, the key to maintaining the system's reliability is to ensure an appropriate amount of oil is secured in the compressors. In order to avoid oil shortage in the compressor, maximum operation is normally forcibly conducted at regular intervals to recover oil from indoor units. This method, typically employed in a standard VRF, causes the system to overheat or overcool and thus waste energy.

In Panasonic FSV-EX systems, a sensor for detecting oil levels is mounted on the pipe of each compressor. In installations with multiple outdoor units, a shortage of oil in one compressor can be compensated for by recovering oil either from another compressor in the same unit, from a compressor in an adjacent outdoor unit, or from a connected indoor unit. Panasonic VRF systems provide users with a comfortable environment whilst saving energy.

The Panasonic system efficiently manages oil recovery in three stages; minimising the frequency of forced oil recovery while reducing energy cost and maintaining comfort.

STAGE-1

Panasonic compressors are equipped with sensors which monitor oil levels precisely at all times. If oil levels fall, oil can be transferred from other compressors within the same outdoor unit.




STAGE-2

If oil levels in all compressors within the outdoor unit fall, oil can be replenished from adjacent outdoor units.




STAGE-3

Forced oil recovery is implemented only if oil levels become insufficient in spite of above measures. The Panasonic system's design concept is radically different from conventional oil systems.

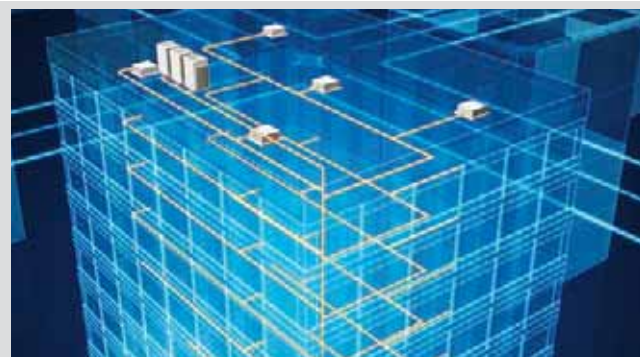


Features of 3-stage oil recovery design

- 1 Oil sensors mounted on each compressor**
Oil sensors mounted on each Panasonic compressor precisely monitor oil levels, eliminating unnecessary oil recovery.

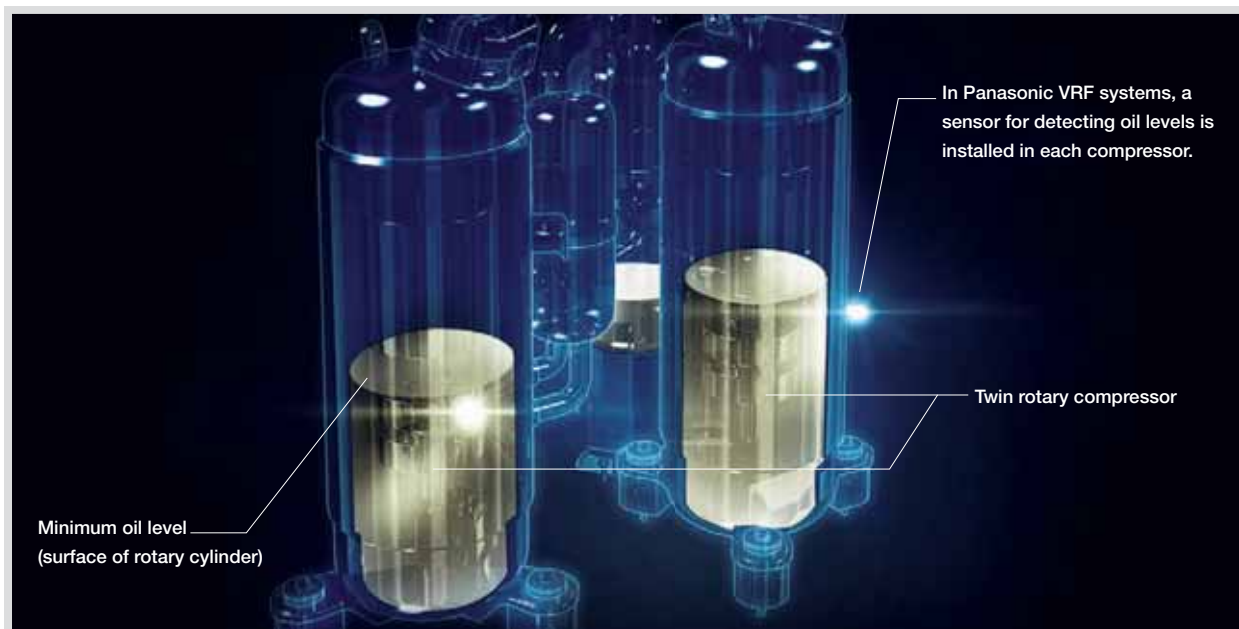


- 2 Highly functional oil separator**
Thanks to extended separate piping, oil recovery efficiency reaches 90%, minimising the oil to be discharged from the compressor.

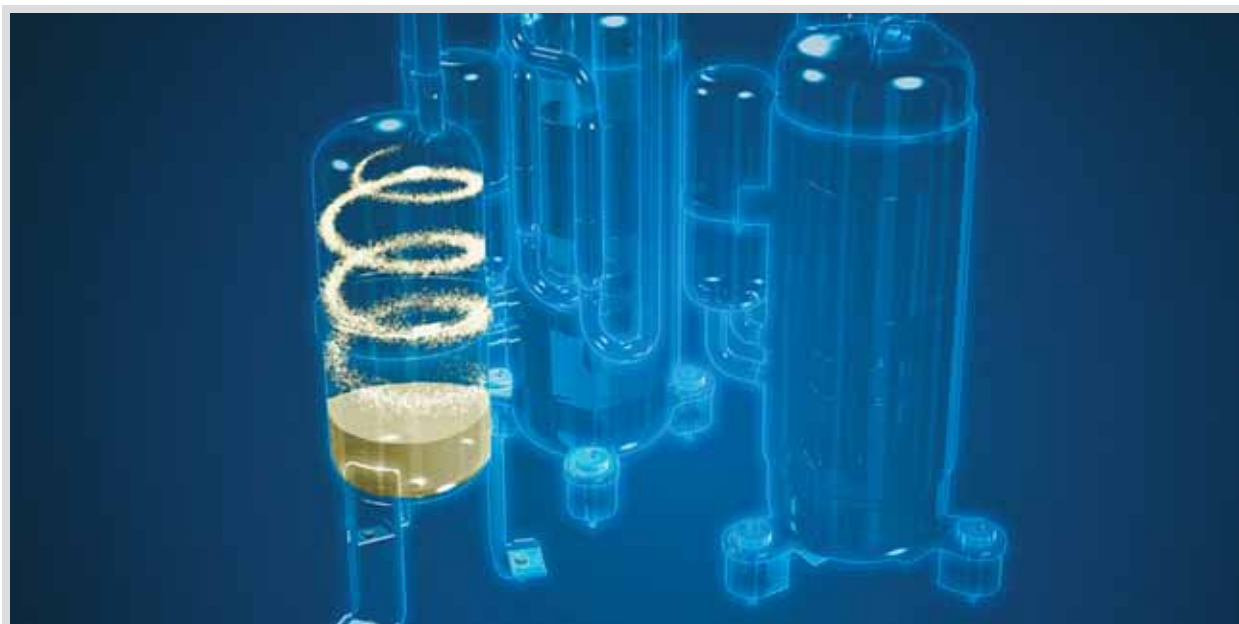

Panasonic VRF: Top In Comfort

Energy savings × Comfortable air conditioning ~Variable Evaporation Temperature (VET)~

Since 2006, all Panasonic VRF systems have included special VET technology, with variable refrigerant temperature, as standard. Our 'smart logic' system checks the temperature every 30 seconds, automatically adjusting the refrigerant temperature according to actual demand and outdoor conditions.

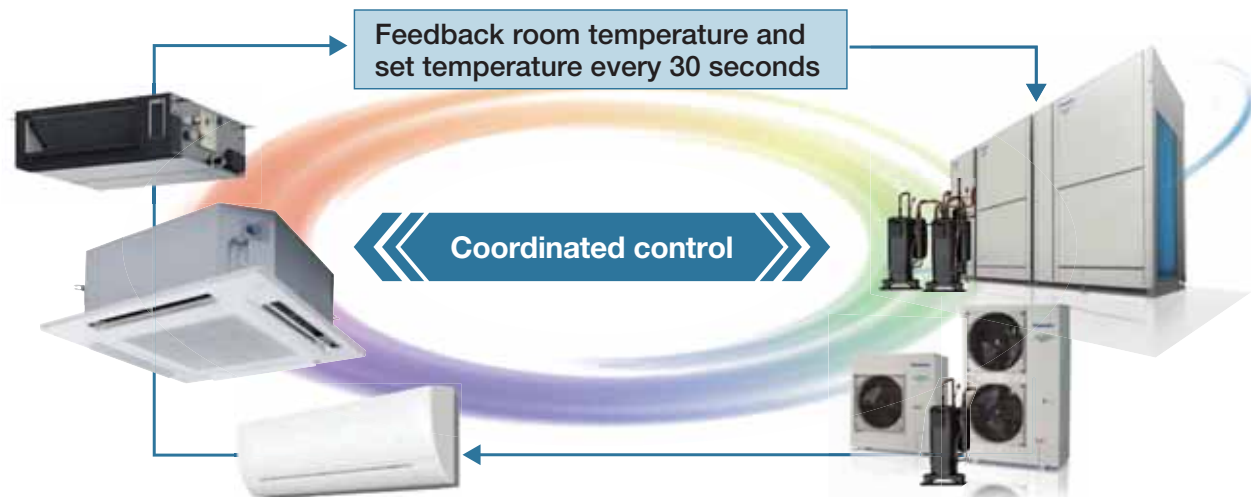


Calculate indoor refrigerant temperature and control the airflow automatically based on the difference between the setting temperature and actual indoor temperature.

Determine system refrigerant temperature and control compressor speed.

* When fan speed is Auto.


Achieves room-by-room comfort and overall system energy savings by controlling optimal refrigerant temperature and circulation volume based on all information of the entire system.

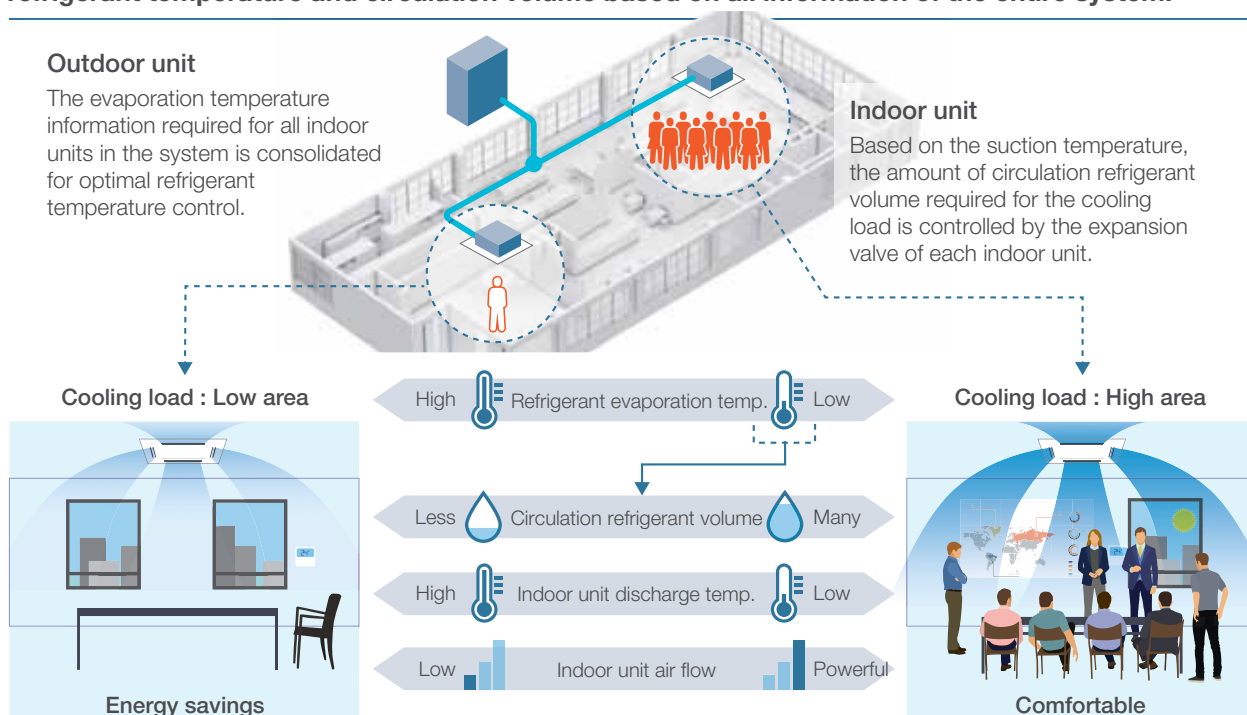


Combination of VET technology and inverter compressor achieves both energy savings and comfort by smoothly controlling the compressor to match the air conditioning load without stopping the compressor for optimum performance.

Image of room temperature change during cooling operation by scene.


1) Normal environment

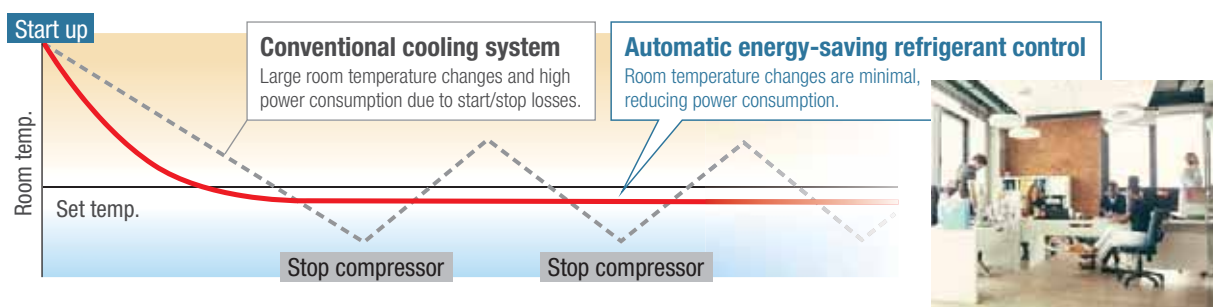

2) Environment with severe cooling load

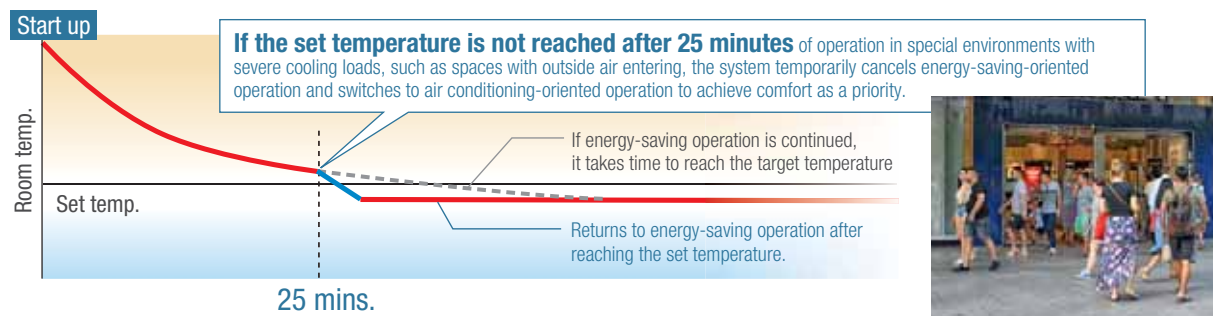

ECONAVI Detects Inefficiencies and Saves Energy

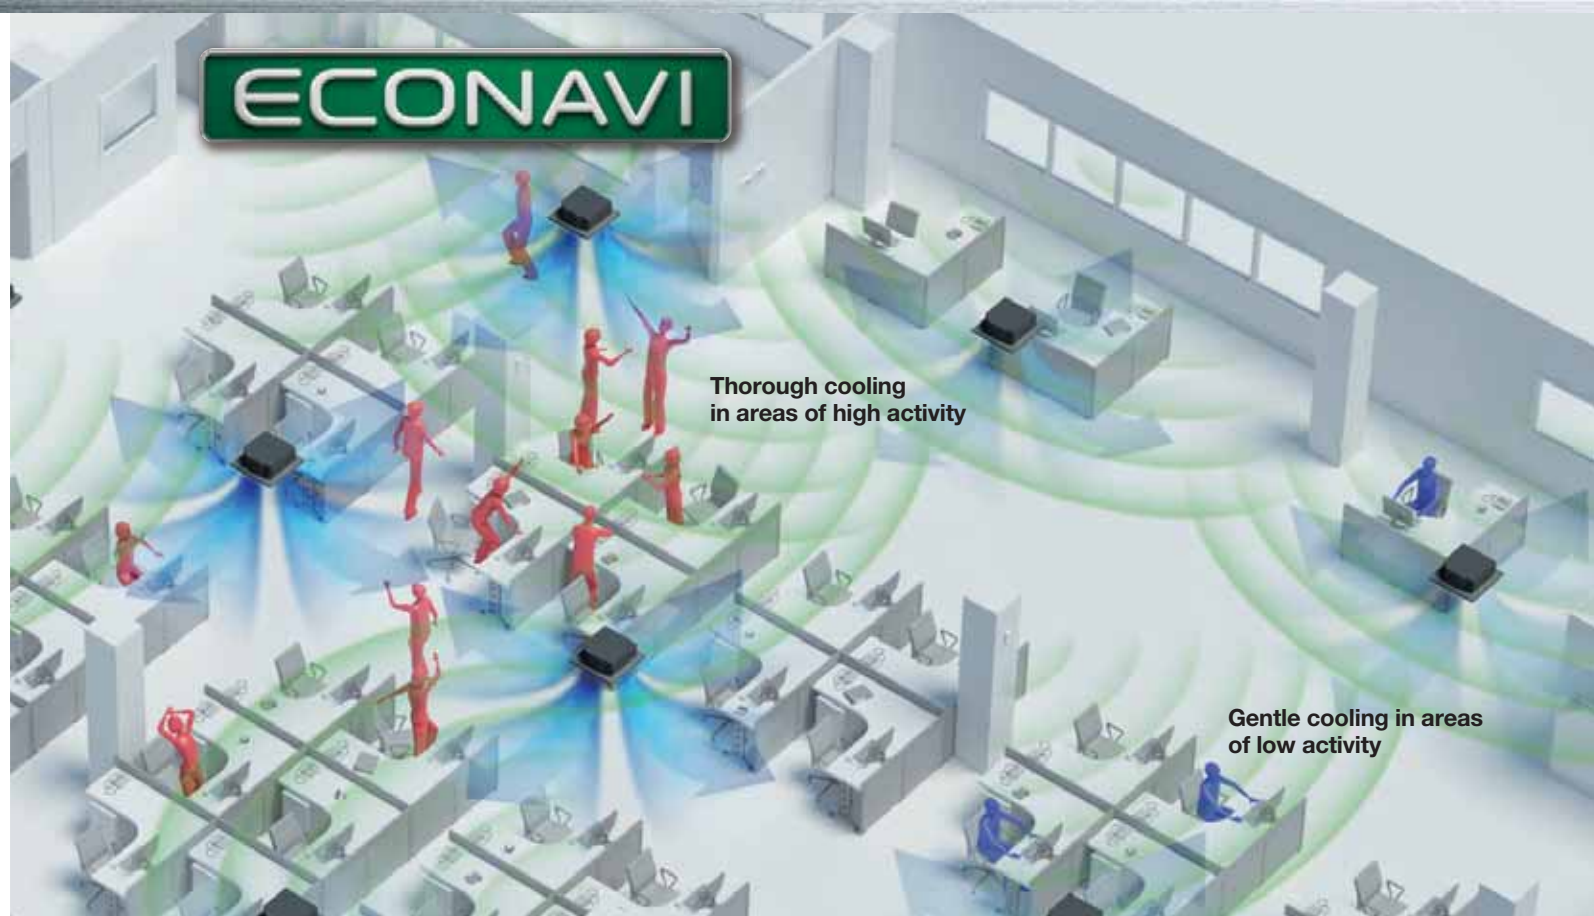

Detection of the level of activity enables precise power saving.

Presence or absence of people at their desks and the level of activity in the office are detected in real time. Set temperature is automatically adjusted to optimise the lower power consumption.



In the morning
Thorough cooling when there is a high level of activity



In the afternoon
Reduced cooling when there are fewer people



At night
Automatic Thermo Off depending on conditions at the end of the day*

Human activity and presence detection

Activity detection

HIGHER ACTIVITY	LOWER ACTIVITY
Cooling Set Temp. +/-0°C	Cooling Set Temp. +1°C
Heating Set Temp. -1°C	Heating Set Temp. +/-0 °C
Every 2 min	Every 2 min



Presence detection

After 20 mins absence	After 3 hours absence
Cooling Set Temp. +2°C	Cooling Thermo OFF*
Heating Set Temp. -2°C	Heating Thermo OFF*

After 3 hours the setting can change to Stop or Temperature Shift



*Depending on conditions, the setting can change to Switch Off After 3 Hours, Thermo Off or Temperature Shift.


ECONAVI



Remote ECONAVI sensor allows optimum energy operation

Pillars, walls, cabinets and other fittings obstruct the sensor, reducing the area of detection and lowering the energy-saving effect. Taking into consideration blind spots, Panasonic enables the optimum layout for sensors in any office.

Wide detection area

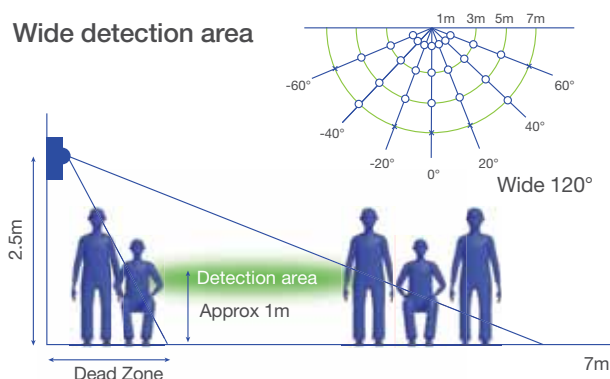

A sensor is remotely set to maximise the detection area.

Installation flexibility ready for indoor unit replacement and layout changes.




ECONAVI sensor
CZ-CENSC1

Panasonic enables use with various types of indoor units

Providing outstanding energy-saving performance, Panasonic's inverter VRF System can be connected to ECONAVI to detect when energy is being wasted. ECONAVI senses the presence or absence of people and the level of activity in each area of an office. When unnecessary heating or cooling is detected, indoor units are individually controlled to match office conditions for energy-saving operation.

ECONAVI VRF Field Test

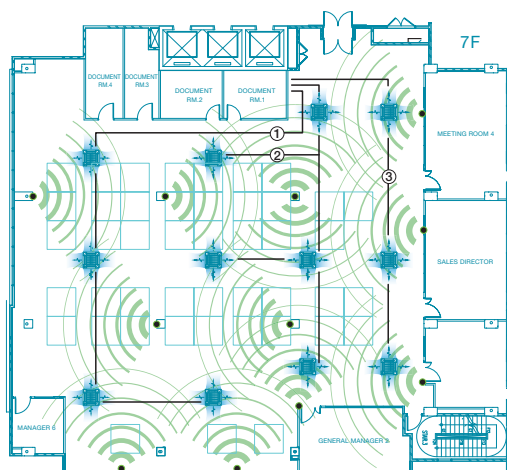

Indoor units (12)

Sensors (12)

Trial term: 11 Apr - 16 May 2014

Location: Panasonic Malaysia Building

Office floor: Cooling capacity 112kW


Testing conditions:

• Remote controller setting temperature 23°C

• Setting time AM7:00~PM21:00

Units used

System	Outdoor unit	Indoor unit
① CU-L7-6	U-20ME1E8	1 S-106MU1E5
		2 S-106MU1E5
		3 S-106MU1E5
		4 S-106MU1E5
② CU-L7-7	U-20ME1E8	5 S-56MU1E5
		6 S-106MU1E5
		7 S-106MU1E5
		8 S-56MU1E5
③ CU-L7-7	U-14ME1E8	9 S-106MU1E5
		10 S-106MU1E5
		11 S-56MU1E5
		12 S-106MU1E5



Panasonic Malaysia Building



Outdoor units on the roof



Sensor installation example

Interior of the office

Power consumption

Without ECONAVI


With ECONAVI

Up to **15%**
energy saving

Energy-saving effect
tested and verified
by Field test

Exclusive Feature


High-spec Wired Remote Controller

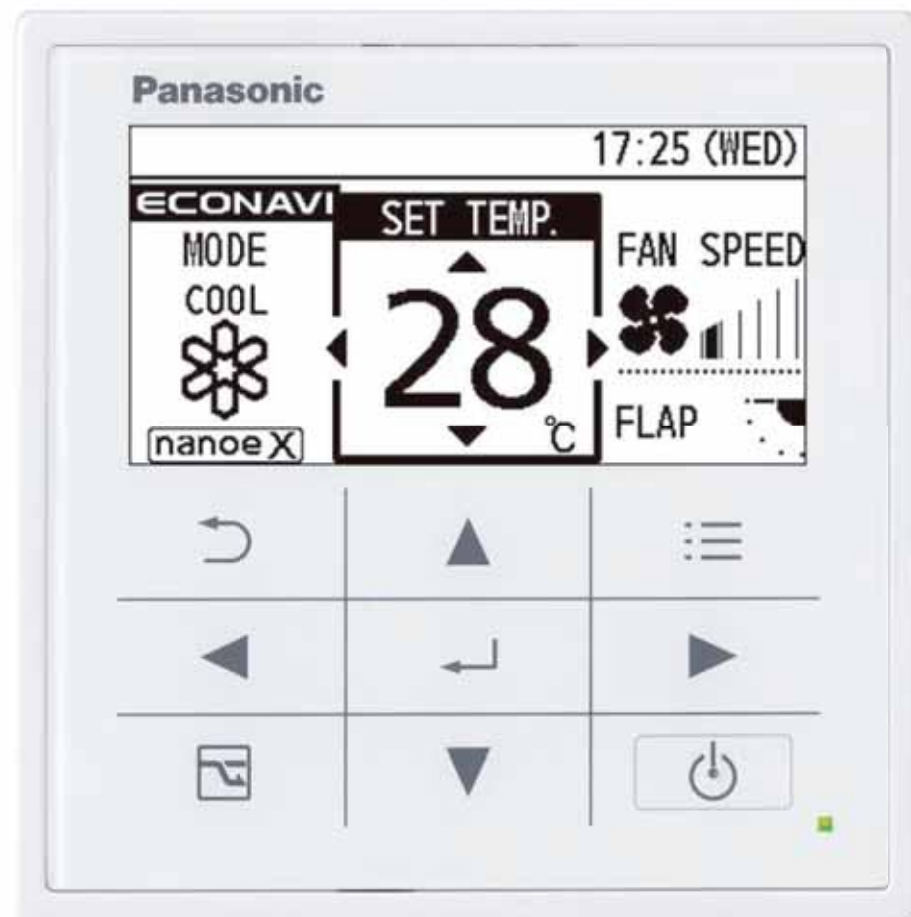

CZ-RTC5B Actual size

Large 3.5" Full-dot LCD with White LED Backlight

Characters and icons are clearly displayed for improved visibility. The display is also large enough to provide a wide range of information for easy confirmation of operation conditions.




Stylish, Easy-to-use Touch Key Design

The elegant, flat design features large touch keys in a simple layout enabling easy, intuitive operation.



Multiple control settings to meet a wide range of air conditioning needs

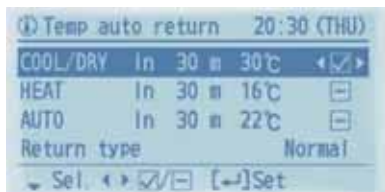


Temperature Auto Return

Even if you change the temperature setting, after a set time it automatically returns to the original temperature setting. You can set temperature auto return time in 10-minute intervals within a period of 4 hours.



Temperature Setting Range


You can set the upper and lower temperature limits. Doing this helps reduce power consumption due to over cooling or heating. Setting is possible in the Cooling, Heating and Dry modes.

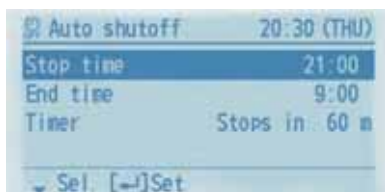

Auto Shutoff

Air conditioning automatically stops after a set time, so you don't have to worry about forgetting to switch the unit off. Even if you manually switch the unit back on after it has stopped, it automatically switches off again after the set time.


Wide range of controls for extra convenience

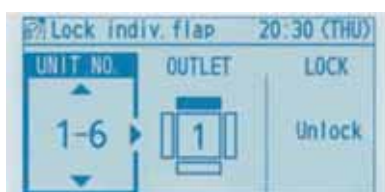

Individual Flap Control


(Lock individual flap only for 4-way cassette U1 type)

Each of the 4-directional outlets can be selected and locked to provide efficient air distribution that matches the indoor unit layout. Indoor units can be set individually.

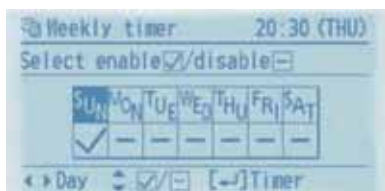

Weekly Timer

This lets you specify 8 Start/Stop times and temperature presets for each day of the week.

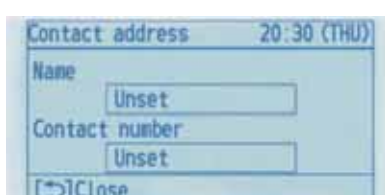

Service Contact Address

Once you have register service contact details, they are automatically displayed if a problem with the air conditioner occurs. This helps you quickly deal with the situation.

Convenient Controls



Operation Lock

To prevent operation by anyone other than the supervisor, operation keys can be locked. This prevents unauthorized personnel from changing temperature settings, airflow rate, airflow direction and other settings.



Maintenance Function

Display of outdoor malfunction data, service contact details, filter cleaning remaining time and other data enables at-a-glance verification of maintenance information with the remote controller.



Filter Information

Filter information is indicated for cleaning after a set time of operation period has past. The number of hours can be adjusted.



Repeat OFF Timer

You can stop the operation after a certain period of time each time operation is performed.



Quiet Operation Mode

There's a Quiet mode that reduces the outdoor unit's operating noise. The mode can be switched On/ Off and Start/End times can be set.



Setting Lists

Information concerning current settings is displayed in the remote controller's LCD for easy confirmation.



Function List

Control Item		Controllability	
		"B" model	Non "B" model
Menu items	Basic instructions	●	●
	FLAP	●	●
	Individual louver control (Lock individual flap only for 4-way cassette U2 type)	●	●
	ON/ OFF timer	●	●
	Weekly timer	●	●
	Filter information	●	—
	Outing function	●	●
	Quiet operation mode	●	—
	Energy saving	●	●
	Initial settings	●	●
	Ventilation	●	●
Energy Saving	Temperature auto return	●	●
	Temperature setting range	●	●
	Auto shutoff	●	●
	Schedule peak cut	●	—
	Repeat off timer	●	●
	ECONAVI on/ off	●	—
Maintenance Function	Outdoor unit error data	●	—
	Service Contact address	●	●
	RC setting mode	●	●
	Test Run	●	●
	Sensor Information	●	●
	Service check	●	●
	Simple/ Detailed Settings	●	●
	Auto address	●	●

Air Handling Unit Kit

AHU Kit connects FSV-EX and FSV outdoor units to Air Handling Units System



If you require this fresh air solution, please contact an authorized Panasonic distributor.

Connect Air Handling Unit to your FSV-EX and FSV systems for a high efficiency operation.

Application: Hotels, offices, server rooms or all large buildings where air quality control such as humidity control and fresh air are needed.

Project References

Office

Hong Kong
Red Cross Headquarters



Air Conditioning System:
VRF 2-way FSV ME1 series:
2 systems
Indoor Units: 2 units
AHU Kit: 6 units
Cooling Capacity: 280 kW / 80 USRT



Residential + Commercial

Malaysia Utropolis, Glenmarie



Air Conditioning System:
VRF 2-way FSV ME1 series:
29 systems
Indoor Units: 168 units
AHU Kit: 9 units
Cooling Capacity: 3,077 kW / 875 USRT



Air Handling Unit Kit to connect to your ventilation system

AHU Connection Kit

PCB, Power trans, Terminal block



Remote control can be easily installed on the AHU Kit box. (Remote control must be purchased separately.)



Expansion valve



Thermistor x2 (Refrigerant: E1, E3)



Thermistor x2 (Air: Tf, Tb)



Optional remote controller

Timer remote controller. CZ-RTC4



Optional parts: Following functions are available by using different type of control accessories:

CZ-RTC4 Wired remote controller

- Operation-ON/OFF
- Mode select
- Temperature setting
- * Fan operation signal can be taken from the PCB.

T10 terminal

- Input signal= Operation ON/OFF

- Remote controller prohibition
- Output signal= Operating-ON status
- Alarm output (by DC12 V)

OPTION terminal, DC12V outlet

- Output signal= Cool / Heat/Fan status
- Defrost
- Thermostat-ON

CZ-CAPBC2 Seri-para I/O unit for each indoor unit

- Temperature setting by 0-10 V or 0-140 Ω input signal
- Room (inlet air) temp outlet by 4-20 mA
- Mode select or/and ON/OFF control
- Fan operation control
- Operation status output/ Alarm output


Technical Zoom

- Max. piping length: 100m (actual)/ 120m (equivalent)
- Difference between longest and shortest piping from first branch: 10m
- Max. length of branch tubing: 12m
- * Other conditions to be referred the standard piping design regulations.
- Available temperature range in Heating: -20 °C (WB)~15 °C (WB)
- Available temperature range for the suction air at AHU Kit: Cool: 18~32 °C / Heat: 16~30 °C

CZ-280MAH1 // CZ-560MAH1


- The system controlled by the suction air (or return air from room) temperature as same as standard indoor unit. (Selectable mode: Automatic / Cooling / Heating / Fan / Dry (but same as Cool))
- The discharge air temperature is also controlled to prevent too-low air discharge in Cooling or too-high air discharge in Heating. (in case of VRF system)
- Demand control (Forcible thermostat-OFF control by operating current)

- Defrost operation signal, Thermo-ON/OFF states output
- External target temperature setting via Indoor/Outdoor signal interface is available with CZ-CAPBC2. (Ex. 0 ~ 10 V)
- Connectable with P-LINK system

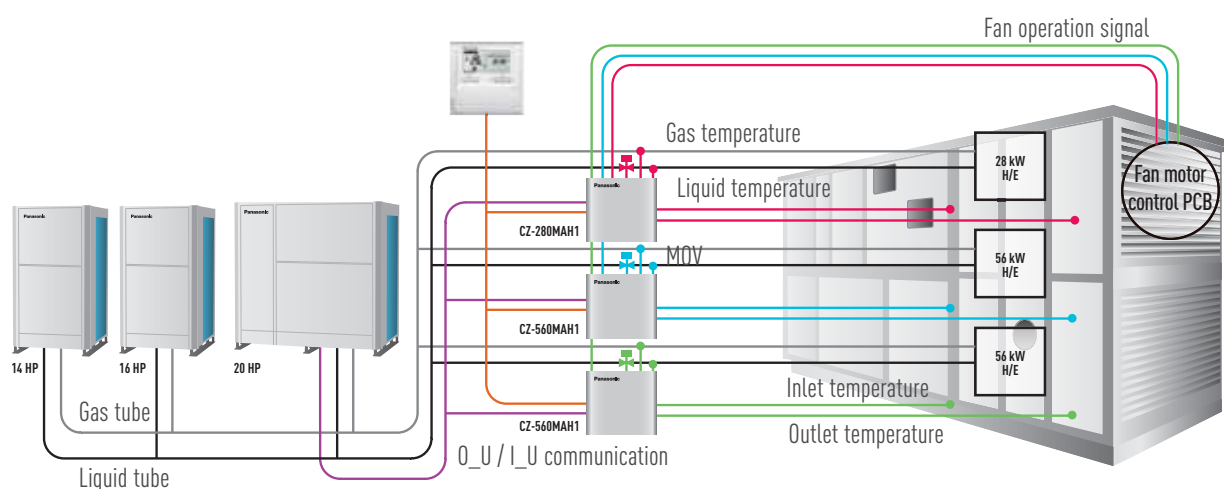

System and regulations. System overview

- A: AHU Kit controller box (with control PCB)
- B: AHU equipment (Field supplied)
- C: Remote controller (option parts)
- D: Outdoor unit
- E: Gas piping (Field supplied)
- F: Liquid piping (Field supplied)
- G: Electronic expansion valve
- H: Thermistor for gas pipe (E3)
- I : Thermistor for liquid pipe (E1)
- J : Thermistor for suction air (TA)
- K: Thermistor for discharge air (BL)
- L : Inter unit wiring
- M: Magnetic relay for operating the blower (Field supplied)

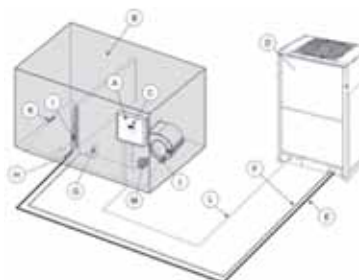

AHU Connection Kit / System Combination

	Capacity (HP)	Outdoor unit combination				AHU kit combination			
2-WAY FSV-EX ME2 Series (Space-saving Combination)*	28.0 kW (10 HP)	U-10ME2H7				CZ-280MAH1			
	56.0 kW (20 HP)	U-20ME2H7				CZ-560MAH1			
	85.0 kW (30 HP)	U-14ME2H7	U-16ME2H7			CZ-560MAH1	CZ-280MAH1		
	113.0 kW (40 HP)	U-20ME2H7	U-20ME2H7			CZ-560MAH1	CZ-560MAH1		
	140.0 kW (50 HP)	U-14ME2H7	U-16ME2H7	U-20ME2H7		CZ-560MAH1	CZ-560MAH1	CZ-280MAH1	
	168.0 kW (60 HP)	U-20ME2H7	U-20ME2H7	U-20ME2H7		CZ-560MAH1	CZ-560MAH1	CZ-560MAH1	
	196.0 kW (70 HP)	U-10ME2H7	U-20ME2H7	U-20ME2H7	U-20ME2H7	CZ-560MAH1	CZ-560MAH1	CZ-560MAH1	CZ-280MAH1
	224.0 kW (80 HP)	U-20ME2H7	U-20ME2H7	U-20ME2H7	U-20ME2H7	CZ-560MAH1	CZ-560MAH1	CZ-560MAH1	CZ-560MAH1

*These are combination examples for space-saving combination. These combinations are also compatible for high efficiency models on page 34-35.

*These are preliminary. Please consult with Panasonic sales engineers.


Exclusive Feature

CAC Design Support Software




Features the unique Drawing Capture Mode function providing More thorough spec-in and tender quotation support for easier, Faster completion of work.

Drawing Capture Mode Diagram

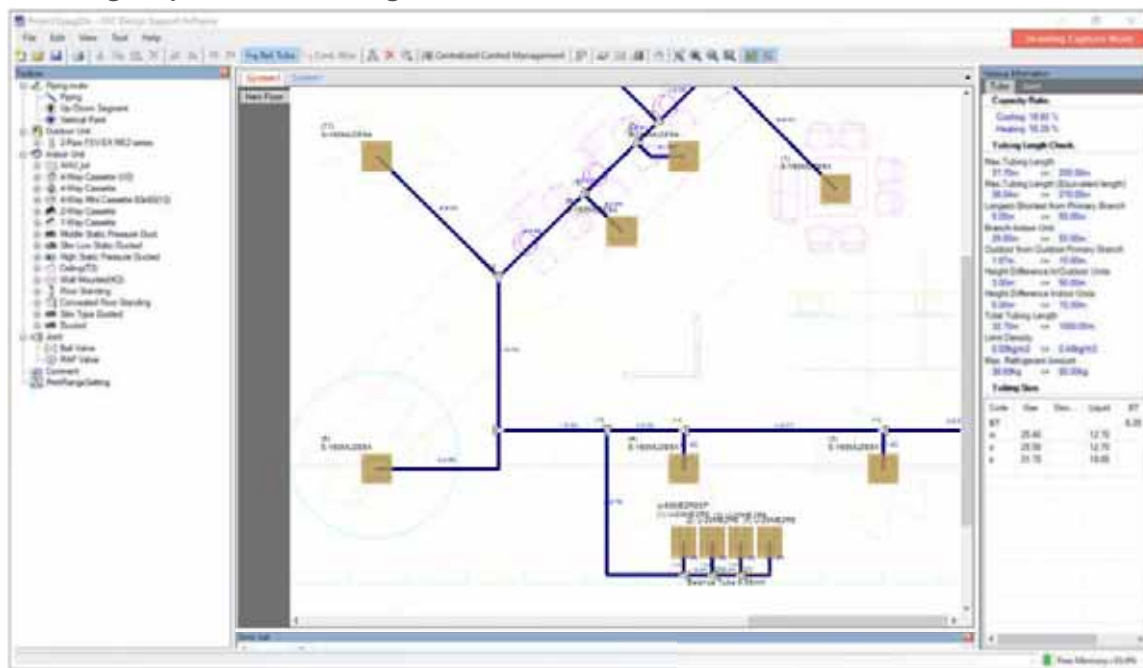

Schematic Mode Diagram

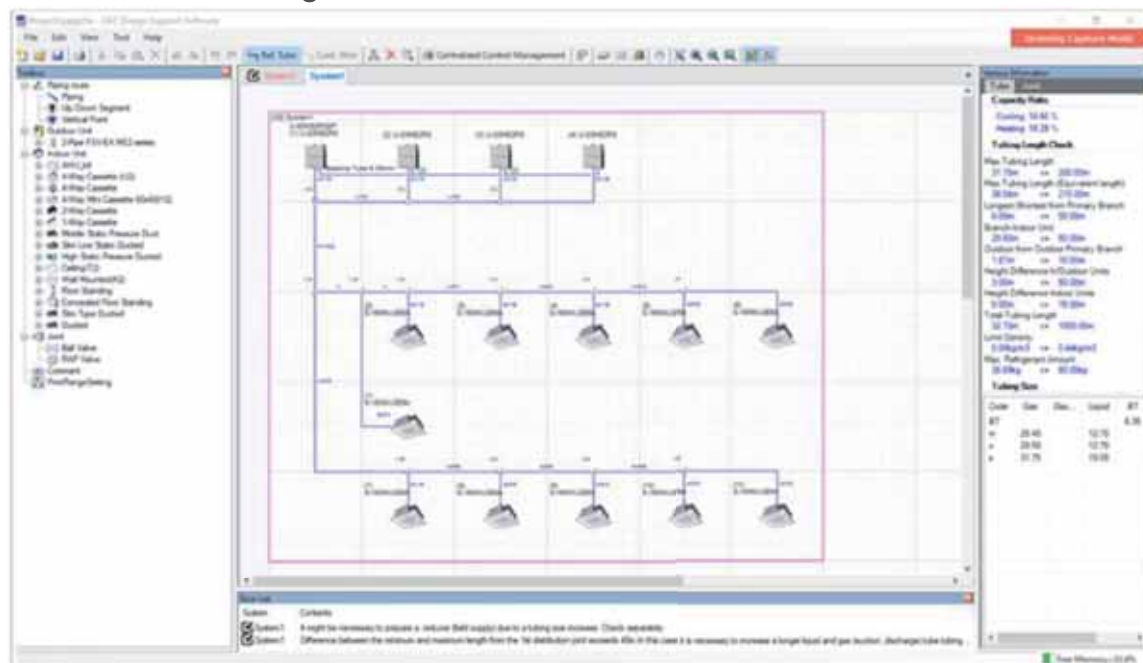

The Panasonic CAC Design Support software can be used for all Panasonic FSV

Panasonic has identified the importance of ever-increasing demands for fast and accurate responses to customer requests in our industry. More and more emphasis is being placed upon energy-efficiency in our marketplace. The ability to calculate cooling/heating loads and produce information of actual design conditions is a major advantage to any architect, consultant, contractor or end user. Panasonic understands the time-poor and demanding industry we are in and we are pleased to announce the launch of the next generation of our system design software program. The Panasonic CAC Design Support Software has been customized to make the selection and design process as quick and easy as possible. The design package utilizes system wizards and import tools to enable both simple and complex systems to be created. In addition, the system will allow outdoor and indoor units to be dragged on an interactive desktop. This allows users to create everything from realistic floor plans with detailed piping and wiring schematics to send out with quotations, through to installation guidance drawings.



Features

- Drawing Capture mode
Design selection from building floor drawing.
- Any kind of drawing format. (.pdf, .dxf, .dwg, etc.)
- Conventional Schematic diagram.
- Easy to use system wizards.
- Converted duties for conditions and pipework.
- Auto(CAD) [.dxf/.dwg], Excel and PDF export.
- Detailed wiring and pipework diagrams with advising terminal number.
- Automatic quotation.
- Automatic tender document assist.



FSV Systems

FSV systems are designed for energy savings, high efficiency, and high durability with strong cooling power even operating at high ambient temperature.

Panasonic continuously apply advanced technologies to meet the requirements of diverse situations and contribute to the creation of comfortable living spaces.



2-WAY FSV-EX ME2 Series

Extraordinary energy-saving performance and powerful operation

Space-saving Combination Model

Cooling or
Heating Type

**Hi-Durability
Model**

- Wide range of systems from 8HP to 80HP
- Class-leading EER of 5.3 (for 8HP model)
- Industry-leading low noise of 53.0 DB (8HP model)
- Cooling operation possible with outdoor temperature as high as 52°C (DB)
- Long maximum pipe length (up to 1,000 m)
- Up to 64 indoor units connectable
- External static pressure of 80 Pa
- Extended operating range allows heating with outdoor temperatures as low as -25°C (WB)
- Suitable for R22 renewal projects 



High Efficiency Combination Model

Cooling or
Heating Type

**Hi-Durability
Model**

- Wide range of systems from 8HP to 64HP
- Class-leading EER of 5.3 (for 8HP model)
- Higher EER than the Space-saving Combination Model
e.g., a combination of two 10HP units delivering 20HP reduces compressor load.
- Suitable for R22 renewal projects 





FSV EX ALL INVERTER

3-WAY FSV-EX MF3 Series

For simultaneous heating and cooling operation

Cooling and Heating
Simultaneous Type

- Wide range of systems from 8HP to 48HP
- Top class EER : 4.87 / COP : 5.09 (in the case of 8HP)
- Longer max piping length (up to 500 m)
- Increased max number of connectable indoor units (up to 52)
- External static pressure up to 80Pa
- Cooling operation is possible when outdoor temperature as high as 52°C DB
- Operating range to provide heating at outdoor temperature as low as -20°C WB
- Suitable for R22 renewal projects 

Heat
Recovery
Type



FSV INVERTER

2-WAY Mini-FSV LE Series

For small-scale commercial and residential use

Cooling or Heating Type 1-phase
Cooling or Heating Type 3-phase

4/5/6 HP

8/10 HP

- High external static pressure 35Pa
- Top-class EER: 5.08 (In case of 4HP) / 4.20 (In case of 8HP)
- Wide operation range: Cooling: -10°C to 46°C DB, Heating at: -20°C to 18°C DB
- Maximum number of connectable indoor units : 13 (In case of 8/10HP)
- Actual piping length : 150m
- Max. piping length : 150m (4/5/6HP) / 300m (8/10HP)
- Suitable for R22 renewal projects 

Industry
Top Class
EER/COP



LE2

LE1

High-efficiency & Space-saving VRF system

2-WAY FSV-EX ME2

Remarkable improvement on key components





Extraordinary energy-saving performance

1 Multiple large-capacity all inverter compressors (more than 14HP)

Two independently controlled inverter compressors achieve high efficiency. Redesigned components in the body provide performance improvement especially in the rated cooling condition and EER performance.



2 Enlarged heat exchanger surface area with triple surface*

The new heat exchanger features a triple-surface construction. Compared to the divided dual-surface construction in current models, there is no division of space and the area for heat exchange is larger.

Also, highly efficient piping pattern increases heat exchange performance by 5%.

* For 8 & 10HP unit, the heat exchanger is 2 row design.



Conventional model [ME1]




New model [ME2]


Redesigned for smooth and better air discharge

3 Newly designed curved air discharge bell mouth for better aerodynamics

The new curved shape with integrated top and bottom assure smooth exhaust flow. This gives more air-volume with same sound level, less power input at same air-volume.



Conventional model [ME1]



New model [ME2]

4 Large air discharge area with new flush surface top panel

To reduce air resistance, instead of a tubular fan design, a new large flat fan guard design, flush with the top panel, is employed. This design lead to the improvements in air resistance, but also contributed to better appearance designing.



Conventional model [ME1]



New model [ME2]

High-efficiency & Space-saving VRF system

2-WAY FSV-EX ME2

A large number of indoor units can be connected

Up to 64 indoor units can be connected in a single system for ultimate design flexibility.

*Maximum number of indoor units depends on outdoor unit capacity.

Up to 64 Indoor Units Connectable*



Increased piping length for greater design flexibility

Adaptable to various building types and sizes


Actual piping length : **200m**

(equivalent piping length : 210m)

Max. total piping length:1,000m

*1: 40 m if the outdoor unit is below the indoor unit.
Elevation difference of Max. 90m in case of ODU is higher than IDU may be allowed following certain conditions.

*1, *2: Please consult with Panasonic sales engineers about the certain conditions in case of piping elevation of over 50m or level difference between indoor units over 15m is required.

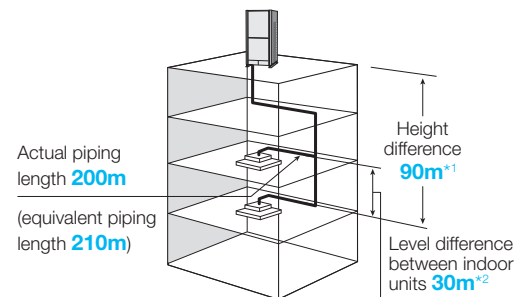

Connectable indoor/outdoor unit capacity ratio up to 130% *

FSV systems attain maximum indoor unit connection capacity of up to 130 %* of the unit's connection range, depending on the outdoor and indoor models selected. So for a reasonable investment, FSV systems provide an ideal air conditioning solution for locations where full cooling/heating are not always required.

SYSTEM / HP	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80
MNcIU : 130%	13	16	19	23	26	29	33	36	40	43	46	50	53	56	59	63	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64


MNcIU : Maximum Number of Connectable Indoor Unit

Note: If more than 100% indoor units are operated with a high load, the units may not perform at the rated capacity.
For the details, please consult with an authorised Panasonic dealer

- * If the following conditions are satisfied, the effective range is above 130 % up to 200 %.
- i) Obey the limited number of connectable indoor units.
 - ii) The lower limit of operating range for heating outdoor temperature is limited to -10°CWB (standard -25°CWB).
 - iii) Simultaneous operation is limited to less than 130 % of connectable indoor units.

Excellent energy savings

The operation efficiency has been improved using highly efficient R410A refrigerant, new DC inverter compressor, and new heat exchanger design.

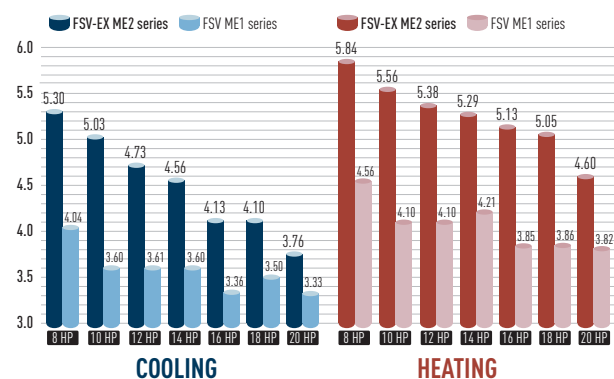




Up to 50m length difference between the longest and the shortest piping from the first branch

Flexible piping layout makes it easier to design systems for locations such as train stations, airports, schools and hospitals.


- Up to 64 units can be connected to one system.
- Difference between maximum and minimum pipe runs after first branch can be a maximum of 50m.
- Larger pipe runs can be up to 200m.

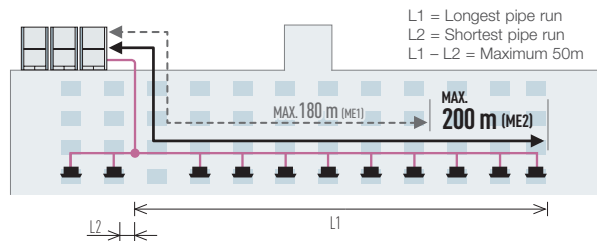

Extended operating range


Cooling operation range:

-10°C DB to +52°C DB

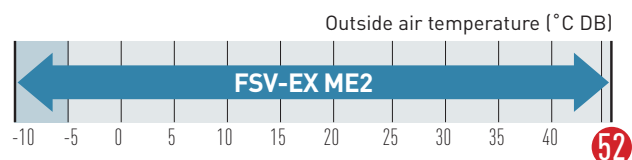

Heating operation range:


Extended heating operation range enables heating even when the outdoor temperature is as low as -25°C. Using a wired remote control, indoor heating temperature range can be set from 16°C to 30°C*.

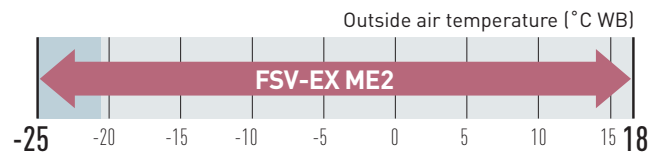

* Depending on the type of remote controller.

Compact design


The new ME2 series has reduced the installation space required with up to 20 HP available in a single chassis. 8 - 10 HP are able to fit inside a lift for easy handling on site.

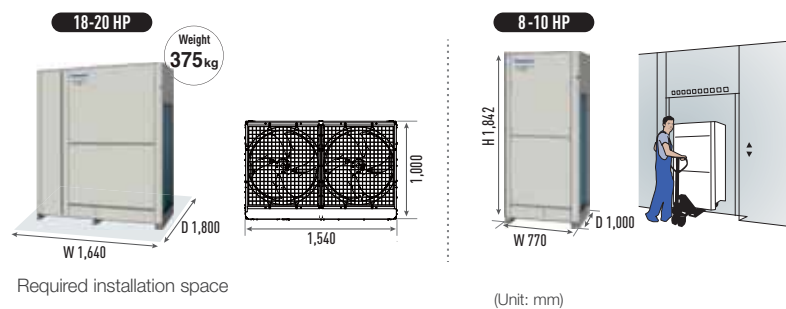

Newly designed fan


Optimised air flow

Newly designed fan and bell-mouth reduces stress on the fan by dispersing air quickly. Thus, lower air resistance results in lower energy consumption.



Noise reduction

Turbulence (blue) can be suppressed and the unwanted noise can be reduced. Even though a high speed fan is utilised, the noise level is still very low.



High-efficiency & Space-saving VRF system


2-WAY FSV-EX ME2

High external static pressure on condensers


With a newly designed fan, fan guard, motor, and casing, new models can be custom-installed on-site to provide up to 80 Pa of external static pressure. An air discharge duct prevents shortages of air circulation, allowing outdoor units to be installed on every floor of a building.



Fan



Fan Motor and Casing

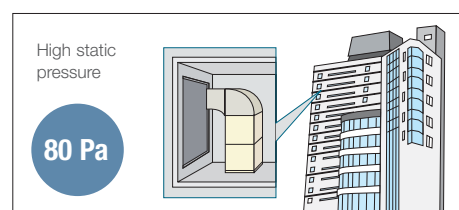


Extended compressor life by uniform compressor operation time

The total run-time of compressors are monitored by a built-in microcomputer, which ensures that operation times of all compressors within the same refrigerant circuit are balanced.

Compressors with histories showing shorter run times are selected first, ensuring equal wear and tear across all units and extended the working life of the system.

System example
[Case1]
A,B,C,D: DC inverter compressor



* Depend on accumulated operation time of each compressors.

* Compressor priority has possibility to be changed.

(e.g) Case1: A→C→B→D, Case2: C→A→D→B, Case3: A→C→D→B, Case4: C→A→B→D

Automatic backup operation in the case of compressor failure or outdoor unit malfunction

Except for 8, 10 & 12 HP
single unit installation

*Backup operation allows uninterrupted cooling or heating to continue whilst waiting for service.
Users should contact their authorised service centre as soon as fault occurs.

Even if a whole outdoor unit fails



The other outdoor unit can keep running

Even if a compressor in a single system fails



The other compressor can keep running

Automatic backup operation.




Demand response

Featuring Inverter control technology, all Panasonic FSV systems are Demand Response Management (DRM) ready. With this control, power consumption at times of peak load can be set in three steps to deliver optimum performance. This helps to reduce annual power consumption with minimal loss in comfort.


Simple Demand Response with the CZ-CAPDC3

Demand control terminal is available to control 0-70-100% of capacities.

*CZ-CAPDC3 is required as an option

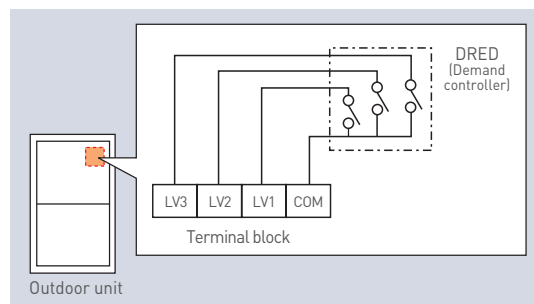

Demand Response Signal	Power Input
LV 3	0%
LV 2	70%
LV 1	100%

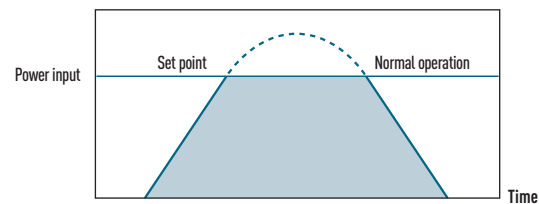

	Power input	
Level 1	100% (Preset)	Possible to change 40-100%
Level 2	70% (Preset)	
Level 3	0% (Always in stop condition)	

Flexible Demand Response with the CZ-CAPDC2 *1

Setting is possible as 0% or in the range from 40% to 100% (in steps of 5%). At the time of shipping, setting has been done to the three steps of 0%, 70% and 100%.

*1 An outdoor Seri-Para I/O unit (CZ-CAPDC2) is required for demand input signal.

Hi-durability outdoor unit

Corrosion-resistance treated for high resistance to rust and salty air to assure long-lasting performance.

Note: Selecting this unit does not completely eliminate the possibility of rust developing. For details concerning unit installation and maintenance, please consult an authorised dealer.



2-WAY FSV-EX ME2 Series

HIGH EFFICIENCY COMBINATION MODEL

Appearance														
HP			8	10	12	14	16	18	20	22	24	26		
								U-18ME2H7HE	U-20ME2H7HE	U-22ME2H7	U-24ME2H7	U-26ME2H7		
Model name			U-8ME2H7	U-10ME2H7	U-12ME2H7	U-14ME2H7	U-16ME2H7	U-8ME2H7 U-10ME2H7	U-10ME2H7 U-10ME2H7	U-10ME2H7 U-12ME2H7	U-12ME2H7 U-12ME2H7	U-10ME2H7 U-16ME2H7		
Power supply			380/400/415V/3-phase/50Hz 380/400V/3-phase/60Hz											
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	73.0		
		BTU/h	76,500	95,600	114,300	136,500	153,600	170,600	191,100	209,900	232,100	249,100		
	Heating	kW	25.0	31.5	37.5	45.0	50.0	56.0	63.0	69.0	76.5	81.5		
		BTU/h	85,300	107,500	128,000	153,600	170,600	191,100	215,000	235,500	261,100	278,200		
EER / COP	Cooling	W/W	5.30	5.03	4.73	4.56	4.13	5.15	5.05	4.84	4.69	4.42		
	Heating	W/W	5.84	5.56	5.38	5.29	5.13	5.71	5.58	5.48	5.31	5.29		
Dimensions	H x W x D	mm	1,842 x 770 x 1,000	1,842 x 770 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,600 x 1,000	1,842 x 1,600 x 1,000	1,842 x 2,010 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,010 x 1,000		
Net weight		kg	210	210	270	315	315	420	420	480	540	525		
Electrical ratings	Cooling	Running current A	7.14 / 6.78 / 6.54	9.62 / 9.14 / 8.81	11.8 / 11.2 / 10.8	15.3 / 14.5 / 14.0	18.4 / 17.5 / 16.8	16.6 / 15.7 / 15.2	19.2 / 18.2 / 17.5	21.4 / 20.4 / 19.6	24.2 / 23.0 / 22.2	28.2 / 26.8 / 25.8		
		Power input kW	4.23	5.57	7.08	8.77	10.9	9.70	11.1	12.7	14.5	16.5		
	Heating	Running current A	7.15 / 6.79 / 6.54	9.68 / 9.20 / 8.86	11.6 / 11.1 / 10.7	14.9 / 14.1 / 13.6	16.6 / 15.8 / 15.2	16.5 / 15.7 / 15.1	19.3 / 18.3 / 17.7	21.3 / 20.2 / 19.5	24.0 / 22.8 / 22.0	26.3 / 25.0 / 24.1		
		Power input kW	4.28	5.67	6.97	8.51	9.75	9.80	11.3	12.6	14.4	15.4		
Starting current		A	1	1	1	2	2	2	2	2	2	3		
Air flow rate		m³/h	13,440	13,440	13,920	13,920	13,920	26,880	26,880	27,360	27,840	27,360		
		L/s	3,733	3,733	3,867	3,867	3,867	7,467	7,466	7,600	7,733	7,600		
Refrigerant amount at shipment		kg	5.6	5.6	8.3	8.3	8.3	11.2	11.2	13.9	16.6	13.9		
External static pressure		Pa	80	80	80	80	80	80	80	80	80	80		
Piping connections	Gas pipe	mm (inches)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø31.75 (Ø1-1/4)		
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø19.05 (Ø3/4)		
	Balance pipe	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)		
Ambient temperature operating range			Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)											
Sound pressure level	Normal mode	dB (A)	53.0	56.0	57.0	58.0	61.0	58.0	59.0	59.5	60.0	62.5		
	Silent mode (2)	dB (A)	48.0	51.0	52.0	53.0	56.0	53.0	54.0	54.5	55.0	57.5		
Sound power level	Normal mode	dB	74.0	77.0	78.0	79.0	82.0	79.0	80.0	80.5	81.0	83.5		

Appearance												
HP			56	58	60	62	64					
			U-56ME2H7HE	U-58ME2H7HE	U-60ME2H7HE	U-62ME2H7	U-64ME2H7					
Model name			U-12ME2H7 U-12ME2H7 U-16ME2H7 U-16ME2H7	U-10ME2H7 U-16ME2H7 U-16ME2H7 U-16ME2H7	U-12ME2H7 U-16ME2H7 U-16ME2H7 U-16ME2H7	U-14ME2H7 U-16ME2H7 U-16ME2H7 U-16ME2H7	U-16ME2H7 U-16ME2H7 U-16ME2H7 U-16ME2H7					
Power supply			380/400/415V/3-phase/50Hz 380/400/3-phase/60Hz									
Capacity	Cooling	kW	156.0	162.0	168.0	174.0	180.0					
		BTU/h	532,400	552,900	573,400	593,300	614,300					
	Heating	kW	175.0	182.0	189.0	195.0	201.0					
		BTU/h	597,300	621,200	645,100	665,500	686,000					
EER / COP	Cooling	W/W	4.38	4.27	4.24	4.23	4.13					
	Heating	W/W	5.24	5.19	5.15	5.16	5.11					
Dimensions	H x W x D	mm	1,842 x 4,900 x 1,000	1,842 x 4,490 x 1,000	1,842 x 4,900 x 1,000	1,842 x 4,900 x 1,000	1,842 x 4,900 x 1,000					
Net weight		kg	1,170	1,155	1,215	1,260	1,260					
Electrical ratings	Cooling	Running current A	60.1 / 57.1 / 55.0	64.0 / 60.8 / 58.6	66.9 / 63.5 / 61.2	70.2 / 66.7 / 64.2	73.6 / 69.9 / 67.4					
		Power input kW	35.6	37.9	39.6	41.1	43.6					
	Heating	Running current A	56.4 / 53.6 / 51.6	59.9 / 56.9 / 54.9	62.7 / 59.5 / 57.4	64.5 / 61.3 / 59.1	67.1 / 63.7 / 61.4					
		Power input kW	33.4	35.1	36.7	37.8	39.3					
Starting current		A	6	7	7	8	8					
Air flow rate		m³/h	55,680	55,200	55,680	55,680	55,680					
		L/s	15,467	15,333	15,467	15,467	15,467					
Refrigerant amount at shipment		kg	33.2	30.5	33.2	33.2	33.2					
External static pressure		Pa	80	80	80	80	80					
Piping connections	Gas pipe	mm (inches)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)					
	Liquid pipe	mm (inches)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)					
	Balance pipe	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)					
Ambient temperature operating range			Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)									
Sound pressure level	Normal mode	dB (A)	65.5	66.5	66.5	66.5	67.0					
	Silent mode	dB (A)	60.5	61.5	61.5	61.5	62.0					
Sound power level	Normal mode	dB	86.5	87.5	87.5	87.5	88.0					

GLOBALREMARKS

Rated conditions:	Cooling	Heating
Indoor air temperature	27°C DB / 19°C WB	20°C DB
Outdoor air temperature	35°C DB	7°C DB / 6°C WB

These specifications are subject to change without notice.
High durable model (with suffix "E") has same specifications.




28	30	32	34	36	38	40	42	44	46	48	50	52	54
U-28ME2H7	U-30ME2H7	U-32ME2H7	U-34ME2H7HE	U-36ME2H7HE	U-38ME2H7HE	U-40ME2H7HE	U-42ME2H7	U-44ME2H7	U-46ME2H7	U-48ME2H7	U-50ME2H7HE	U-52ME2H7HE	U-54ME2H7HE
U-12ME2H7 U-16ME2H7	U-14ME2H7 U-16ME2H7	U-16ME2H7 U-16ME2H7	U-10ME2H7 U-12ME2H7 U-12ME2H7	U-12ME2H7 U-12ME2H7 U-12ME2H7	U-10ME2H7 U-12ME2H7 U-16ME2H7	U-12ME2H7 U-12ME2H7 U-16ME2H7	U-10ME2H7 U-16ME2H7 U-16ME2H7	U-12ME2H7 U-16ME2H7 U-16ME2H7	U-14ME2H7 U-16ME2H7 U-16ME2H7	U-16ME2H7 U-16ME2H7 U-16ME2H7	U-10ME2H7 U-12ME2H7 U-12ME2H7 U-16ME2H7	U-12ME2H7 U-12ME2H7 U-12ME2H7 U-16ME2H7	U-10ME2H7 U-12ME2H7 U-12ME2H7 U-16ME2H7
380/400/415V/3-phase/50Hz 380/400V/3-phase/60Hz													
78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0	140.0	145.0	151.0
267,900	290,100	307,200	327,600	344,700	365,200	385,700	402,700	423,200	443,700	460,800	477,800	494,900	515,400
87.5	95.0	100.0	108.0	113.0	119.0	127.0	132.0	138.0	145.0	150.0	155.0	160.0	169.0
298,600	324,200	341,300	368,600	385,700	406,100	433,400	450,500	471,000	494,900	511,900	529,000	546,100	576,800
4.36	4.31	4.13	4.80	4.72	4.51	4.45	4.31	4.26	4.25	4.13	4.58	4.53	4.40
5.24	5.19	5.13	5.40	5.38	5.31	5.23	5.22	5.19	5.18	5.12	5.36	5.33	5.26
1,842 x 2,420 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,420 x 1,000	1,842 x 3,250 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,250 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,250 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,660 x 1,000	1,842 x 4,490 x 1,000	1,842 x 4,900 x 1,000	1,842 x 4,490 x 1,000
585	630	630	750	810	795	855	840	900	945	945	1,065	1,125	1,110
30.4 / 28.9 / 27.8	33.6 / 31.9 / 30.8	36.8 / 35.0 / 33.7	33.8 / 32.1 / 30.9	35.7 / 33.9 / 32.7	40.0 / 38.0 / 36.6	42.4 / 40.3 / 38.8	46.3 / 43.9 / 42.4	49.1 / 46.7 / 45.0	52.2 / 49.6 / 47.8	55.2 / 52.4 / 50.5	51.7 / 49.1 / 47.3	53.4 / 50.8 / 48.9	57.9 / 55.0 / 53.0
18.0	19.7	21.8	20.0	21.4	23.7	25.4	27.4	29.1	30.6	32.7	30.6	32.0	34.3
28.2 / 26.8 / 25.8	31.6 / 30.0 / 28.9	33.3 / 31.6 / 30.5	33.8 / 32.1 / 30.9	35.1 / 33.3 / 32.1	37.8 / 35.9 / 34.6	41.0 / 39.0 / 37.6	43.2 / 41.0 / 39.5	44.9 / 42.7 / 41.1	48.3 / 45.9 / 44.3	50.0 / 47.5 / 45.8	48.8 / 46.3 / 44.7	50.6 / 48.1 / 46.4	54.8 / 52.1 / 50.2
16.7	18.3	19.5	20.0	21.0	22.4	24.3	25.3	26.6	28.0	29.3	28.9	30.0	32.1
3	4	4	3	3	4	4	5	5	6	6	5	5	6
27,840	27,840	27,840	41,280	41,760	41,280	41,760	41,280	41,760	41,760	41,760	55,200	55,680	55,200
7,733	7,733	7,733	11,467	11,600	11,467	11,600	11,467	11,600	11,600	11,600	15,333	15,467	15,333
16.6	16.6	16.6	22.2	24.9	22.2	24.9	22.2	24.9	24.9	24.9	30.5	33.2	30.5
80	80	80	80	80	80	80	80	80	80	80	80	80	80
Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)
Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)
Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)													
62.5	63.0	64.0	61.5	62.0	63.5	63.5	65.0	65.0	65.0	66.0	64.5	64.5	65.5
57.5	58.0	59.0	56.5	57.0	58.5	58.5	60.0	60.0	60.0	61.0	59.5	59.5	60.5
83.5	84.0	85.0	82.5	83.0	84.5	84.5	86.0	86.0	86.0	87.0	85.5	85.5	86.5

8 / 10 HP


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing the downward
C: (Installation hole pitch)

Top view



Front view

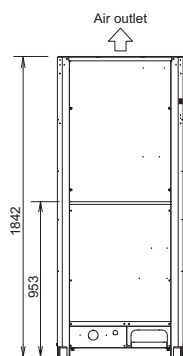


unit: mm

12 / 14 / 16 HP


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing the downward
C: (Installation hole pitch)

Top view



Front view

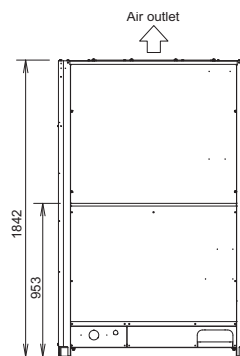

unit: mm

2-WAY FSV-EX ME2 Series SPACE SAVING COMBINATION MODEL

Appearance												
HP			8	10	12	14	16	18	20	22 U-22ME2H7	24 U-24ME2H7	
Model name			U-8ME2H7	U-10ME2H7	U-12ME2H7	U-14ME2H7	U-16ME2H7	U-18ME2H7	U-20ME2H7	U-10ME2H7 U-12ME2H7	U-12ME2H7 U-12ME2H7	
Power supply			380/400/415V/3-phase/50Hz 380/400V/3-phase/60Hz									
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	
		BTU/h	76,500	95,600	114,300	136,500	153,600	170,600	191,100	209,900	232,100	
	Heating	kW	25.0	31.5	37.5	45.0	50.0	56.0	63.0	69.0	76.5	
		BTU/h	85,300	107,500	128,000	153,600	170,600	191,100	215,000	235,500	261,100	
EER / COP	Cooling	W/W	5.30	5.03	4.73	4.56	4.13	4.10	3.76	4.84	4.69	
	Heating	W/W	5.84	5.56	5.38	5.29	5.13	5.05	4.60	5.48	5.31	
Dimensions	H x W x D	mm	1,842 x 770 x 1,000	1,842 x 770 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,180 x 1,000	1,842 x 1,540 x 1,000	1,842 x 1,540 x 1,000	1,842 x 2,010 x 1,000	1,842 x 2,420 x 1,000	
Net weight		kg	210	210	270	315	315	375	375	480	540	
Electrical ratings	Cooling	Running current A	7.14 / 6.78 / 6.54	9.62 / 9.14 / 8.81	11.8 / 11.2 / 10.8	15.3 / 14.5 / 14.0	18.4 / 17.5 / 16.8	20.6 / 19.6 / 18.9	24.6 / 23.4 / 22.5	21.4 / 20.4 / 19.6	24.2 / 23.0 / 22.2	
		Power input kW	4.23	5.57	7.08	8.77	10.9	12.2	14.9	12.7	14.5	
	Heating	Running current A	7.15 / 6.79 / 6.54	9.68 / 9.20 / 8.86	11.6 / 11.1 / 10.7	14.9 / 14.1 / 13.6	16.6 / 15.8 / 15.2	18.9 / 18.0 / 17.4	22.9 / 21.7 / 20.9	21.3 / 20.2 / 19.5	24.0 / 22.8 / 22.0	
		Power input kW	4.28	5.67	6.97	8.51	9.75	11.1	13.7	12.6	14.4	
Starting current		A	1	1	1	2	2	2	2	2	2	
Air flow rate		m³/h	13,440	13,440	13,920	13,920	13,920	24,300	24,300	27,360	27,840	
		L/s	3,733	3,733	3,867	3,867	3,867	6,750	6,750	7,600	7,733	
Refrigerant amount at shipment		kg	5.6	5.6	8.3	8.3	8.3	9.5	9.5	13.9	16.6	
External static pressure		Pa	80	80	80	80	80	80	80	80	80	
Piping connections	Gas pipe	mm (inches)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	
	Balance pipe	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	
Ambient temperature operating range			Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)									
Sound pressure level	Normal mode	dB (A)	53.0	56.0	57.0	58.0	61.0	59.0	59.0	59.5	60.0	
	Silent mode (2)	dB (A)	48.0	51.0	52.0	53.0	56.0	54.0	54.0	54.5	55.0	
Sound power level	Normal mode	dB	74.0	77.0	78.0	79.0	82.0	80.0	80.0	80.5	81.0	

Appearance												
HP			50 U-50ME2H7SP	52 U-52ME2H7SP	54 U-54ME2H7SP	56 U-56ME2H7SP	58 U-58ME2H7SP	60 U-60ME2H7SP	62 U-62ME2H7	64 U-64ME2H7	66 U-66ME2H7SP	
Model name			U-14ME2H7 U-16ME2H7 U-20ME2H7	U-16ME2H7 U-16ME2H7 U-20ME2H7	U-14ME2H7 U-20ME2H7 U-20ME2H7	U-16ME2H7 U-20ME2H7 U-20ME2H7	U-18ME2H7 U-20ME2H7 U-20ME2H7	U-20ME2H7 U-20ME2H7 U-20ME2H7	U-14ME2H7 U-16ME2H7 U-16ME2H7 U-16ME2H7	U-16ME2H7 U-16ME2H7 U-16ME2H7 U-16ME2H7	U-10ME2H7 U-16ME2H7 U-20ME2H7 U-20ME2H7	
Power supply			380/400/415V/3-phase/50Hz 380/400/3-phase/60Hz									
Capacity	Cooling	kW	140.0	145.0	151.0	156.0	162.0	168.0	174.0	180.0	185.0	
		BTU/h	477,800	494,900	515,400	532,400	552,900	573,400	593,900	614,300	631,400	
	Heating	kW	155.0	160.0	169.0	175.0	182.0	189.0	195.0	201.0	207.0	
		BTU/h	529,000	546,100	576,800	597,300	621,200	645,100	665,500	686,000	706,500	
EER / COP	Cooling	W/W	4.09	3.99	3.95	3.87	3.86	3.76	4.23	4.13	4.00	
	Heating	W/W	5.00	4.95	4.79	4.76	4.73	4.60	5.16	5.11	4.85	
Dimensions	H x W x D	mm	1,842 x 4,020 x 1,000	1,842 x 4,020 x 1,000	1,842 x 4,380 x 1,000	1,842 x 4,380 x 1,000	1,842 x 4,740 x 1,000	1,842 x 4,740 x 1,000	1,842 x 4,900 x 1,000	1,842 x 4,900 x 1,000	1,842 x 5,210 x 1,000	
Net weight		kg	1,005	1,005	1,065	1,065	1,125	1,125	1,260	1,260	1,275	
Electrical ratings	Cooling	Running current A	57.7 / 54.8 / 52.9	60.6 / 57.6 / 55.5	63.8 / 60.6 / 58.4	67.3 / 63.9 / 61.6	70.1 / 66.6 / 64.2	73.8 / 70.1 / 67.6	70.2 / 66.7 / 64.2	73.6 / 69.9 / 67.4	77.3 / 73.4 / 70.8	
		Power input kW	34.2	36.3	38.2	40.3	42.0	44.7	41.1	43.6	46.3	
	Heating	Running current A	52.9 / 50.3 / 48.5	54.5 / 51.8 / 49.9	59.6 / 56.6 / 54.6	62.1 / 59.0 / 56.9	65.0 / 61.7 / 59.5	68.6 / 65.2 / 62.8	64.5 / 61.3 / 59.1	67.1 / 63.7 / 61.4	72.1 / 68.5 / 66.0	
		Power input kW	31.0	32.3	35.3	36.8	38.5	41.1	37.8	39.3	42.7	
Starting current		A	6	6	6	6	6	6	8	8	7	
Air flow rate		m³/h	52,140	52,140	62,520	62,520	72,900	72,900	55,680	55,680	75,960	
		L/s	14,483	14,483	17,366	17,366	20,250	20,250	15,467	15,467	21,100	
Refrigerant amount at shipment		kg	26.1	26.1	27.3	27.3	28.5	28.5	33.2	33.2	32.9	
External static pressure		Pa	80	80	80	80	80	80	80	80	80	
Piping connections	Gas pipe	mm (inches)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	
	Liquid pipe	mm (inches)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	
	Balance pipe	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	
Ambient temperature operating range			Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)									
Sound pressure level	Normal mode	dB (A)	64.5	65.5	63.5	64.5	64.0	64.0	66.5	67.0	65.5	
	Silent mode (2)	dB (A)	59.5	60.5	58.5	59.5	59.0	59.0	61.5	62.0	60.5	
Sound power level	Normal mode	dB	85.5	86.5	84.5	85.5	85.0	85.0	87.5	88.0	86.5	



26	28	30	32	34	36	38	40	42	44	46	48
U-26ME2H7	U-28ME2H7	U-30ME2H7	U-32ME2H7	U-34ME2H7SP	U-36ME2H7SP	U-38ME2H7SP	U-40ME2H7SP	U-42ME2H7	U-44ME2H7	U-46ME2H7	U-48ME2H7
U-10ME2H7 U-16ME2H7	U-12ME2H7 U-16ME2H7	U-14ME2H7 U-16ME2H7	U-16ME2H7 U-16ME2H7	U-14ME2H7 U-20ME2H7	U-16ME2H7 U-20ME2H7	U-18ME2H7 U-20ME2H7	U-20ME2H7 U-20ME2H7	U-10ME2H7 U-16ME2H7 U-16ME2H7	U-12ME2H7 U-16ME2H7 U-16ME2H7	U-14ME2H7 U-16ME2H7 U-16ME2H7	U-16ME2H7 U-16ME2H7 U-16ME2H7

380/400/415V/3-phase/50Hz
380/400V/3-phase/60Hz

73.0	78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0
249,100	267,900	290,100	307,200	327,600	344,700	365,200	385,700	402,700	423,200	443,700	460,800
81.5	87.5	95.0	100.0	108.0	113.0	119.0	127.0	132.0	138.0	145.0	150.0
278,200	298,600	324,200	341,300	368,600	385,700	406,100	433,400	450,500	471,000	494,900	511,900
4.42	4.36	4.31	4.13	4.05	3.91	3.89	3.74	4.31	4.26	4.25	4.13
5.29	5.24	5.19	5.13	4.86	4.81	4.80	4.58	5.22	5.19	5.18	5.12
1,842 x 2,010 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,420 x 1,000	1,842 x 2,780 x 1,000	1,842 x 2,780 x 1,000	1,842 x 3,140 x 1,000	1,842 x 3,140 x 1,000	1,842 x 3,250 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,660 x 1,000	1,842 x 3,660 x 1,000
525	585	630	630	690	690	750	750	840	900	945	945
28.2 / 26.8 / 25.8	30.4 / 28.9 / 27.8	33.6 / 31.9 / 30.8	36.8 / 35.0 / 33.7	40.0 / 38.0 / 36.6	43.1 / 40.9 / 39.4	45.9 / 43.6 / 42.0	49.9 / 47.4 / 45.7	46.3 / 43.9 / 42.4	49.1 / 46.7 / 45.0	52.2 / 49.6 / 47.8	55.2 / 52.4 / 50.5
16.5	18.0	19.7	21.8	23.7	25.8	27.5	30.2	27.4	29.1	30.6	32.7
26.3 / 25.0 / 24.1	28.2 / 26.8 / 25.8	31.6 / 30.0 / 28.9	33.3 / 31.6 / 30.5	37.9 / 36.0 / 34.7	39.7 / 37.7 / 36.3	41.9 / 39.8 / 38.3	46.2 / 43.9 / 42.3	43.2 / 41.0 / 39.5	44.9 / 42.7 / 41.1	48.3 / 45.9 / 44.3	50.0 / 47.5 / 45.8
15.4	16.7	18.3	19.5	22.2	23.5	24.8	27.7	25.3	26.6	28.0	29.3
3	3	4	4	4	4	4	4	5	5	6	6
27,360	27,840	27,840	27,840	38,220	38,220	48,600	48,600	41,280	41,760	41,760	41,760
7,600	7,733	7,733	7,733	10,617	10,617	13,500	13,500	11,467	11,600	11,600	11,600
13.9	16.6	16.6	16.6	17.8	17.8	19.0	19.0	22.2	24.9	24.9	24.9
80	80	80	80	80	80	80	80	80	80	80	80
Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)	Ø38.10 (Ø1-1/2)
Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)
Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)											
62.5	62.5	63.0	64.0	61.5	63.5	62.0	62.0	65.0	65.0	65.0	66.0
57.5	57.5	58.0	59.0	56.5	58.5	57.0	57.0	60.0	60.0	60.0	61.0
83.5	83.5	84.0	85.0	82.5	84.5	83.0	83.0	86.0	86.0	86.0	87.0

GLOBALREMARKS

Rated conditions:	Cooling	Heating
Indoor air temperature	27°C DB / 19°C WB	20°C DB
Outdoor air temperature	35°C DB	7°C DB / 6°C WB

These specifications are subject to change without notice.
High durable model (with suffix "E") has same specifications.

68	70	72	74	76	78	80
U-68ME2H7SP	U-70ME2H7SP	U-72ME2H7SP	U-74ME2H7SP	U-76ME2H7SP	U-78ME2H7SP	U-80ME2H7SP
U-12ME2H7 U-16ME2H7 U-20ME2H7 U-20ME2H7	U-10ME2H7 U-20ME2H7 U-20ME2H7 U-20ME2H7	U-12ME2H7 U-16ME2H7 U-20ME2H7 U-20ME2H7	U-16ME2H7 U-18ME2H7 U-20ME2H7 U-20ME2H7	U-16ME2H7 U-20ME2H7 U-20ME2H7 U-20ME2H7	U-18ME2H7 U-20ME2H7 U-20ME2H7 U-20ME2H7	U-20ME2H7 U-20ME2H7 U-20ME2H7 U-20ME2H7

380/400/415V/3-phase/50Hz
380/400/3-phase/60Hz

190.0	196.0	202.0	208.0	213.0	219.0	224.0
648,500	668,900	689,400	709,900	727,000	747,400	764,500
213.0	219.0	226.0	233.0	239.0	245.0	252.0
727,000	747,400	771,300	795,200	815,700	836,200	860,100
3.99	3.90	3.91	3.90	3.83	3.82	3.76
4.84	4.73	4.82	4.79	4.70	4.69	4.60
1,842 x 5,620 x 1,000	1,842 x 5,570 x 1,000	1,842 x 5,620 x 1,000	1,842 x 5,980 x 1,000	1,842 x 5,980 x 1,000	1,842 x 6,340 x 1,000	1,842 x 6,340 x 1,000
1,335	1,335	1,380	1,440	1,440	1,500	1,500
79.5 / 75.5 / 72.8	84.0 / 79.8 / 76.9	86.2 / 81.8 / 78.9	89.0 / 84.5 / 81.5	91.8 / 87.2 / 84.1	94.6 / 89.9 / 86.6	98.4 / 93.5 / 90.1
47.6	50.3	51.6	53.3	55.6	57.3	59.6
73.5 / 69.8 / 67.3	77.3 / 73.4 / 70.8	79.2 / 75.2 / 72.5	82.0 / 77.9 / 75.1	85.0 / 80.7 / 77.8	87.2 / 82.8 / 79.8	91.5 / 86.9 / 83.8
44.0	46.3	46.9	48.6	50.9	52.2	54.8
7	7	8	8	8	8	8
76,440	86,340	76,440	86,820	86,820	97,200	97,200
21,233	23,983	21,233	24,117	24,117	27,000	27,000
35.6	34.1	35.6	36.8	36.8	38.0	38.0
80	80	80	80	80	80	80
Ø41.28 (Ø1-5/8)	Ø41.28 (Ø1-5/8)	Ø44.45 (Ø1-3/4)	Ø44.45 (Ø1-3/4)	Ø44.45 (Ø1-3/4)	Ø44.45 (Ø1-3/4)	Ø44.45 (Ø1-3/4)
Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)
Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Cooling: -10°C (DB)~ +52°C (DB). Heating: -25°C (WB)~ +18°C (WB)						
65.5	64.5	66.5	66.0	66.0	65.0	65.0
60.5	59.5	61.5	61.0	61.0	60.0	60.0
86.5	85.5	87.5	87.0	87.0	86.0	86.0


2-WAY FSV-EX ME2 Series **SPACE SAVING COMBINATION MODEL**

8 / 10 HP


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

- A: (Installation hole pitch) For removing tube forward
- B: (Installation hole pitch) For removing the downward
- C: (Installation hole pitch)

Top view

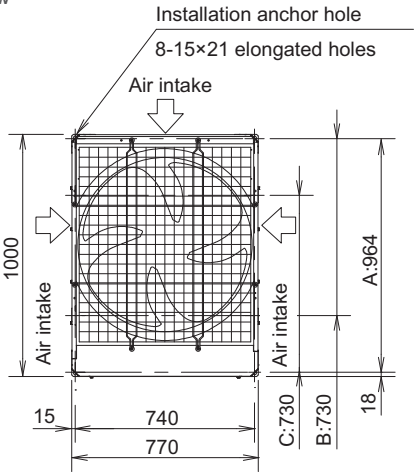

Front view

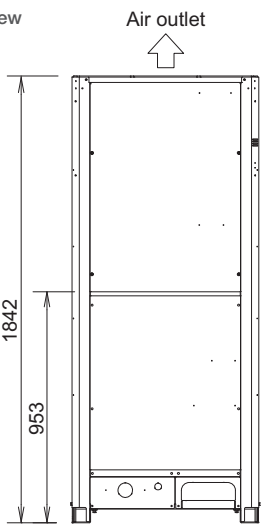


unit: mm

12 / 14 / 16 HP


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

- A: (Installation hole pitch) For removing tube forward
- B: (Installation hole pitch) For removing the downward
- C: (Installation hole pitch)

Top view

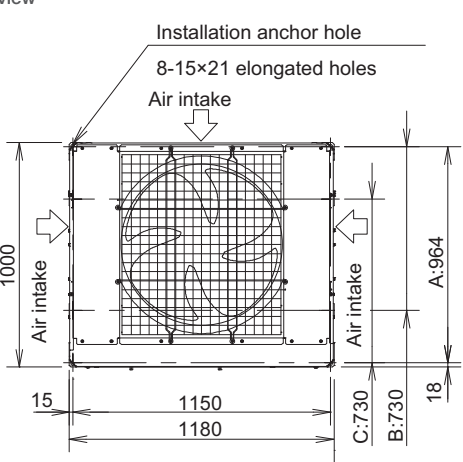

Front view

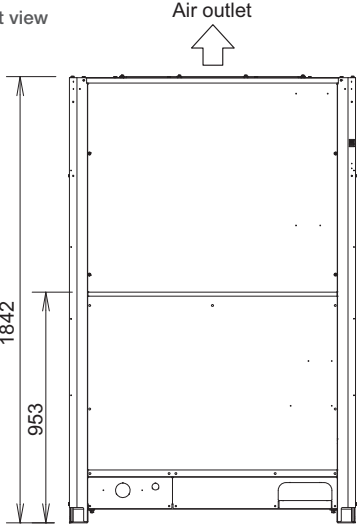

unit: mm



U-8ME2H7
U-10ME2H7



U-12ME2H7
U-14ME2H7
U-16ME2H7




U-18ME2H7
U-20ME2H7

18 / 20 HP


According to the installation site, you may choose the setting position in the depth direction of the anchor bolt from A, B or C.

A: (Installation hole pitch) For removing tube forward
B: (Installation hole pitch) For removing the downward
C: (Installation hole pitch)

Top view

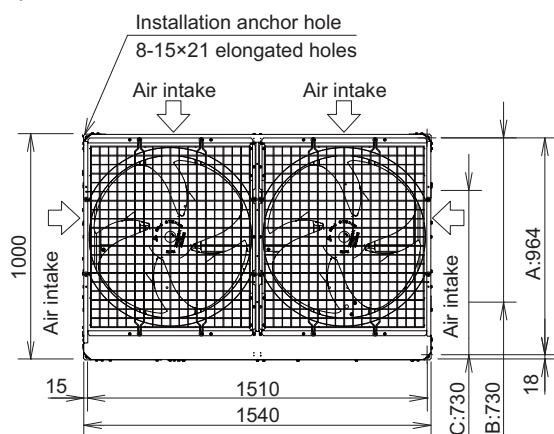


Front view

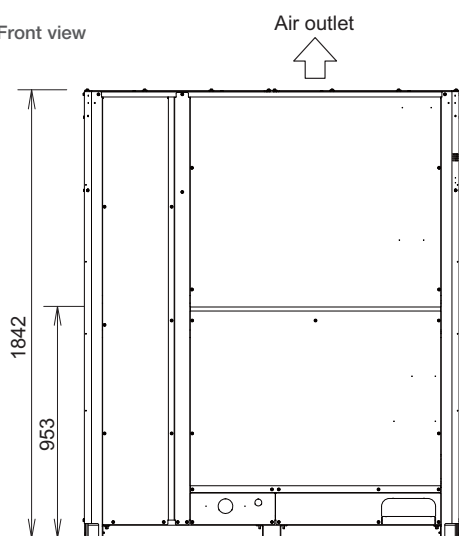

unit: mm

Piping Design

Select installation locations so that the lengths and sizes of refrigerant piping are within the allowable ranges shown in the figure below.

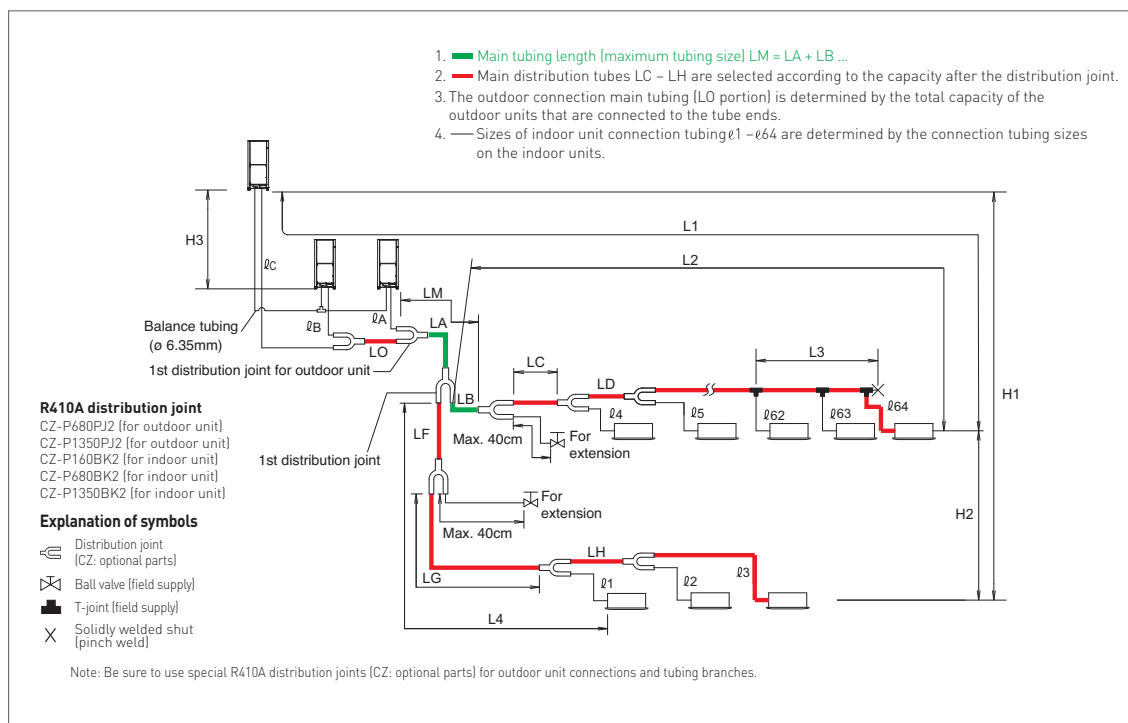

Ranges that apply to refrigerant piping lengths and to differences in installation heights

Items	Mark	Contents	Length (m)
Allowable tubing length	L1	Max. tubing length	Actual length $\leq 200^{*2}$ Equivalent length $\leq 210^{*2}$
	ΔL (L2-L4)	Difference between max. length and min. length from the 1st distribution joint	$\leq 50^{*5}$
	LM	Max. length of main tubing (at maximum size) * Even after 1st distribution joint, LM is allowed if at maximum tubing length.	$\sim^{*3}$
	$\ell 1, \ell 2 \sim \ell 64$	Max. length of each distribution tube	$\leq 50^{*7}$
	$L1 + \ell 1 + \ell 2 \sim \ell 63 + \ell A + \ell B + LF + LG + LH$	Total max. tubing length including length of each distribution tube (only liquid tubing)	≤ 1000
	$\ell A, \ell B + LO, \ell C + LO$	Maximum tubing length from outdoor's 1st distribution joint to each outdoor unit	≤ 10
Allowable elevation difference	H1	When outdoor unit is installed higher than indoor unit	≤ 50
	H2	When outdoor unit is installed lower than indoor unit	≤ 40
	H3	Max. difference between indoor units	$\leq 15^{*6}$
Allowable length of joint tubing	L3	T-joint tubing (field-supply); Max. tubing length between the first T-joint and solidly welded-shut end point	≤ 2

L = Length, H = Height

NOTE

1: The outdoor connection main tubing (LO portion) is determined by the total capacity of the outdoor units that are connected to the tube ends.

2: If the longest tubing length (L1) exceeds 90 m (equivalent length), increase the sizes of the main tubes (LM) by 1 rank for gas tubes and liquid tubes. Use a field supply reducer. Select the tube size from the table of main tubing sizes (Table 3) and from the table of refrigerant tubing sizes (Table 8) on the second following page.

3: If the longest main tubing length (LM) exceeds 50 m, increase the main tubing size at the portion before 50 m by 1 rank for the gas tubes. Use a field supply reducer.

Determine the length less than the limitation of allowable maximum tubing length. For the portion that exceeds 50 m, set based on the main tubing size (LA) listed in Table 3.

4: If the size of the existing tubing is already larger than the standard tubing size, it is not necessary to further increase the size.

* If the existing tubing is used, and the amount of on-site refrigerant charge exceeds the value listed below, then change the size of the tubing to reduce the amount of refrigerant.

Total amount of refrigerant for the system with 1 outdoor unit: 50 kg

Total amount of refrigerant for the system with 2 outdoor units: 80 kg

Total amount of refrigerant for the system with 3 outdoor units or 4 outdoor units: 105 kg

5: When the tubing length exceeds 40 m, increase a longer liquid or gas tubing by 1 rank. Refer to the Technical Data for the details.

6: If the total distribution tubing length exceeds 500m, maximum allowable elevation difference (H2) between the indoor units is calculated by the following formula. Make sure the indoor unit's actual elevation difference should fall within the figure calculated as follows.

Unit of account (meter): $15 \times (2 - \text{total tubing length(m)} \div 500)$

7: If any of the tubing length exceeds 30m, increase the size of the liquid and gas tubes by 1 rank.

Necessary amount of additional refrigerant charge per outdoor unit

U-8ME2H7(E)	U-10ME2H7(E)	U-12ME2H7(E)	U-14ME2H7(E)	U-16ME2H7(E)	U-18ME2H7(E)	U-20ME2H7(E)
5.5kg	5.5kg	7.0 kg	7.0 kg	7.0 kg	7.0 kg	7.0 kg

System limitations

Max. No. allowable connected outdoor units	4 *2
Max. capacity allowable connected outdoor units	224 kW (80 HP)
Max. connectable indoor units	64 *1
Max. allowable indoor/outdoor capacity ratio	50-130 % *3

*1: In the case of 38 HP or smaller units, the number is limited by the total capacity of the connected indoor units.

*2: Up to 4 units can be connected if the system has been extended.

*3: If the following conditions are satisfied, the effective range is above 130 % and below 200 %.

i) Obey the limited number of connectable indoor units.

ii) The lower limit of operating range for heating outdoor temperature is limited to -10°CWB (standard -25°CWB).

iii) Simultaneous operation is limited to less than 130 % of connectable indoor units.

Additional refrigerant charge

Liquid tubing size mm (inches)	Amount of refrigerant charge/m (g/m)
ø6.35 (ø1/4)	26
ø9.52 (ø3/8)	56
ø12.7 (ø1/2)	128
ø15.88 (ø5/8)	185
ø19.05 (ø3/4)	259
ø22.22 (ø7/8)	366
ø25.4 (ø1)	490

Refrigerant piping (Existing piping can be used.)

High Efficiency Combination Model

Piping size (mm)			
Material Temper - O		Material Temper - 1/2 H, H	
ø6.35	t 0.8	ø22.22	t 1.0
ø9.52	t 0.8	ø25.4	t 1.0
ø12.7	t 0.8	ø28.58	t 1.0
ø15.88	t 1.0	ø31.75	t 1.1
ø19.05	t 1.2	ø38.1	over t 1.35
		ø41.28	over t 1.45
		ø44.45	over t1.55

Space Saving Combination Model

Piping size (mm)			
Material Temper - O		Material Temper - 1/2 H, H	
ø6.35	t 0.8	ø22.22	t 1.0
ø9.52	t 0.8	ø25.4	t 1.0
ø12.7	t 0.8	ø28.58	t 1.0
ø15.88	t 1.0	ø31.75	t 1.1
ø19.05	t 1.2	ø38.1	over t 1.35
		ø41.28	over t 1.45
		ø44.45	over t1.55
		ø50.8	over t1.8

* When bending the tubes, use a bending radius that is at least 4 times the outer diameter of the tubes. In addition, take sufficient care to avoid crushing or damaging the tubes when bending them.



Refrigerant Branch Pipes (optional accessories) for 2-WAY ME2 Series

Optional Distribution Joint Kits

See the installation instructions packaged with the distribution joint kit for the installation procedure.

* In case the total capacity of indoor units connected after distribution exceeds the total capacity of the outdoor units, select the distribution tubing size for the total capacity of the outdoor units.


Model name	Cooling capacity after distribution	Remarks
1. CZ-P680PJ2	68.0 kW or less	For outdoor unit
2. CZ-P1350PJ2	more than 68.0 kW	For outdoor unit
3. CZ-P160BK2	22.4 kW or less *	For indoor unit
4. CZ-P680BK2	68.0 kW or less *	For indoor unit
5. CZ-P1350BK2	more than 68.0 kW *	For indoor unit

Tubing size (with thermal insulation)


1. CZ-P680PJ2

For outdoor unit (Capacity after distribution joint is 68.0 kW or less.)

GAS TUBING

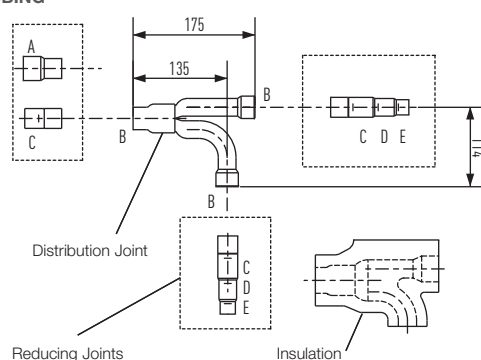

LIQUID TUBING

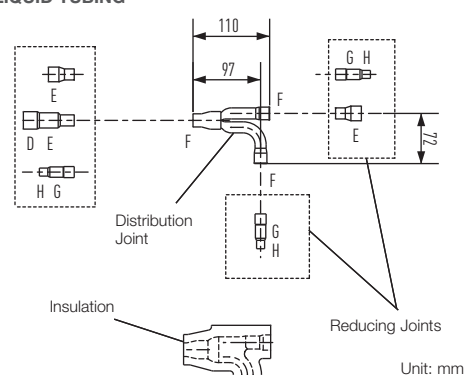


Size of connection point on each part (Shown are inside diameters of tubing)

Size	Part A	Part B	Part C	Part D	Part E	Part F	Part G	Part H
Dimension (mm)	ø31.75	ø28.58	ø25.40	ø22.22	ø19.05	ø15.88	ø12.70	ø9.52
Dimension (inches)	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8


2. CZ-P1350PJ2

For outdoor unit (Capacity after distribution joint is more than 68.0 kW.)

GAS TUBING

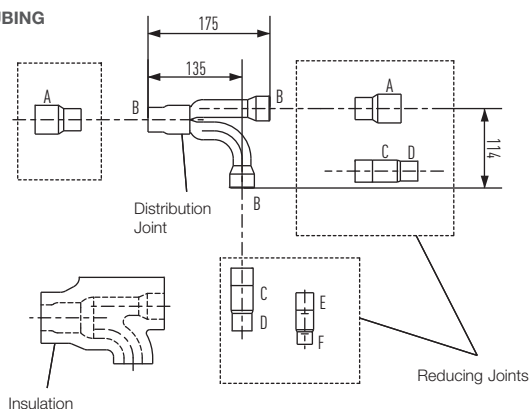

LIQUID TUBING

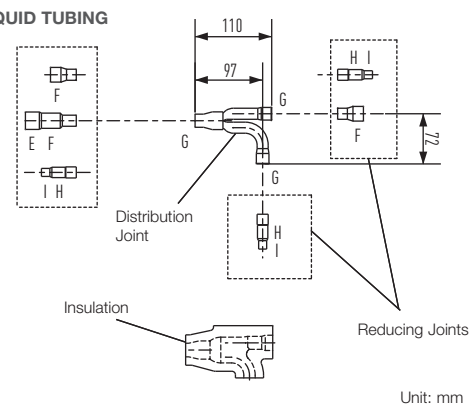

Size of connection point on each part (Shown are inside diameters of tubing)


Size	Part A	Part B	Part C	Part D	Part E	Part F	Part G	Part H	Part I
Dimension (mm)	ø38.10	ø31.75	ø28.58	ø25.40	ø22.22	ø19.05	ø15.88	ø12.70	ø9.52
Dimension (inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8

* If the tube diameter is more than ø38.1, use field-supply reducer.


3. CZ-P160BK2

Use: For indoor unit (Capacity after distribution joint is 22.4 kW or less.)*

GAS TUBING

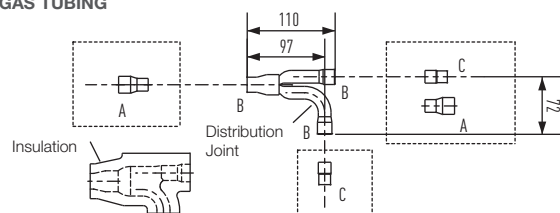

LIQUID TUBING

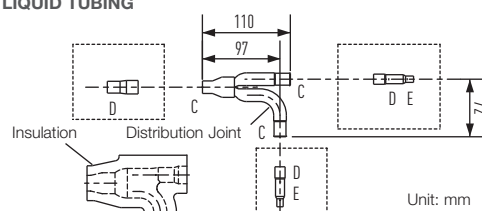

Unit: mm


Size of connection point on each part (Shown are inside diameters of tubing)

Size	Part A	Part B	Part C	Part D	Part E
Dimension (mm)	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
(inches)	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4


4. CZ-P680BK2

Use: For indoor unit (Capacity after distribution joint is more than 22.4 kW and no more than 68.0 kW.)*

GAS TUBING

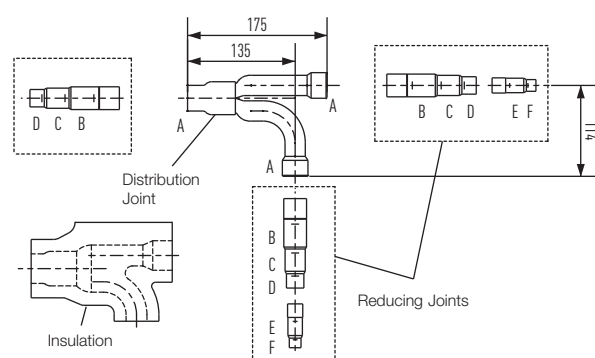

LIQUID TUBING

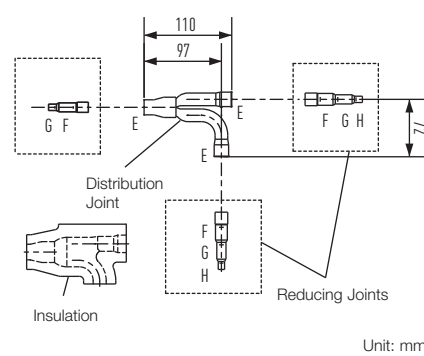

Unit: mm


Size of connection point on each part (Shown are inside diameters of tubing)

Size	Part A	Part B	Part C	Part D	Part E	Part F	Part G	Part H
Dimension (mm)	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
(inches)	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4


5. CZ-P1350BK2

Use: For indoor unit (Capacity after distribution joint is more than 68.0 kW.)*

GAS TUBING

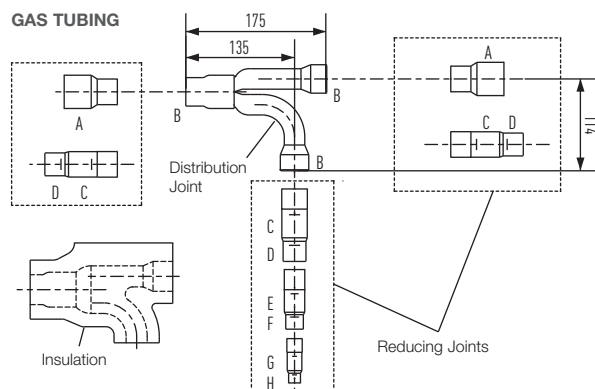

LIQUID TUBING

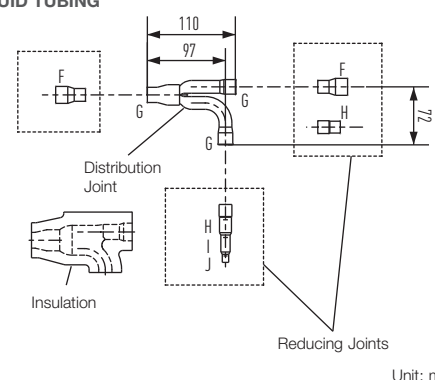

Unit: mm

Size of connection point on each part (Shown are inside diameters of tubing)

Size	Part A	Part B	Part C	Part D	Part E	Part F	Part G	Part H	Part I	Part J
Dimension (mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
(inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

*If the tube diameter is more than Ø38.1, use field-supply reducer.

* In case the total capacity of indoor units connected after distribution exceeds the total capacity of the outdoor units, select the distribution tubing size for the total capacity of the outdoor units.



Simultaneous heating and cooling VRF system

3-WAY FSV-EX MF3 Series

Heat Recovery Type

New 3-WAY FSV-EX MF3 series enables simultaneous heating and cooling operation

- Suitable for R22 renewal projects (Refer to Page 128) 
- Demand response ready (Peak cut)



* Office building with diverse room temperatures due to the different amount of sunshine received.
* The building with computer/business equipment rooms requiring year-round cooling.



Fully-automatic simultaneous cooling/heating operation and heat recovery


3-WAY MF3 series enables simultaneous heating and cooling operation by each solenoid valve kit.
New design to decrease chattering noise at low capacity load.



Individual control of multiple indoor units with solenoid valve kits

- Any design and layout can be used in a single system.
- Cooling operation is possible up to an outdoor temperature of -10°C DB.

System Structure

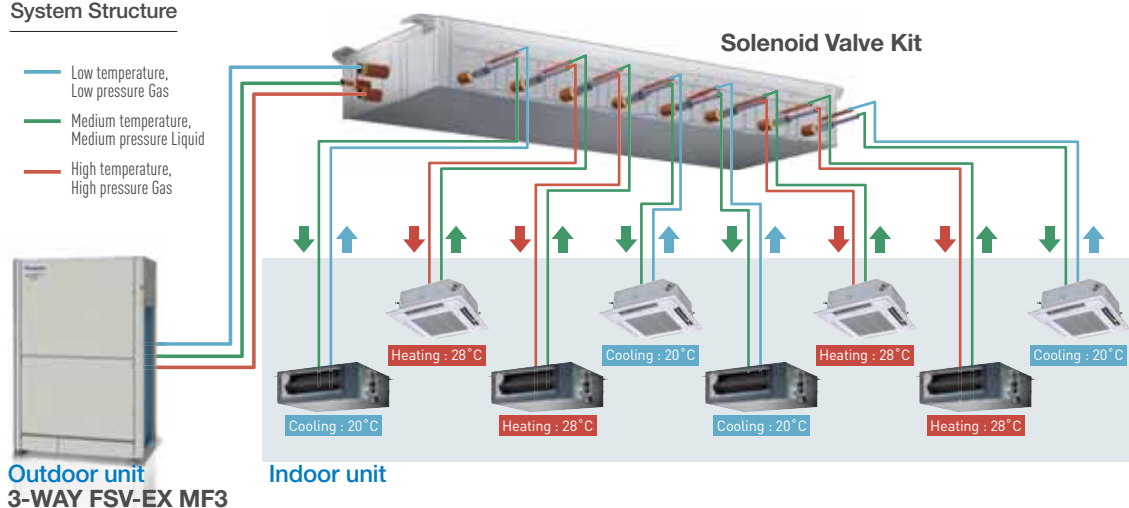


Simultaneous heating and cooling VRF system

3-WAY FSV-EX MF3 Series

New Solenoid Valve Kit Multiple Connection Port Type


The new Panasonic Solenoid Valve Kit field installation work becomes more easy. In fact, our latest technology is designed new packages body without additional branch-kits and 3-way control PCB. Connection tube for main refrigerant circuit line comes on both side of the unit. It helps the system design and piping layout for more flexible.

System Structure

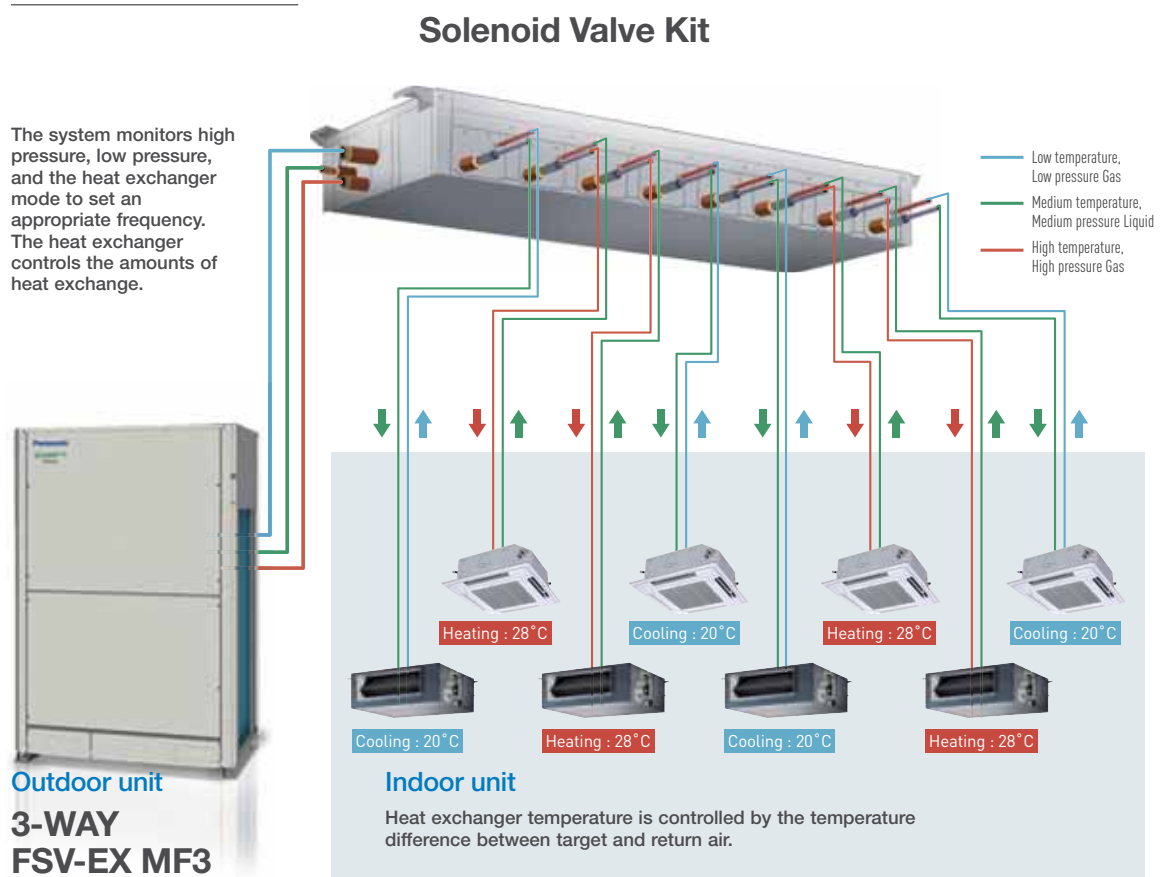





CZ-P456HR3
CZ-P4160HR3



CZ-P656HR3




CZ-P856HR3

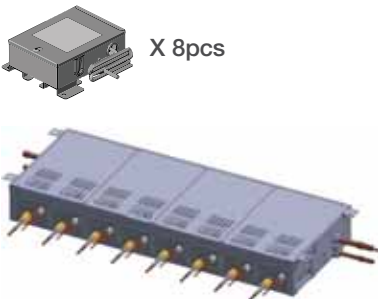



	1 port	4 port	6 port	8 port
56 type	CZ-P56HR3	CZ-P456HR3	CZ-P656HR3	CZ-P856HR3
160 type	CZ-P160HR3	CZ-P4160HR3	--	--

Solenoid Valve Kit / Wiring Work

Current Model /
Single Connection Type

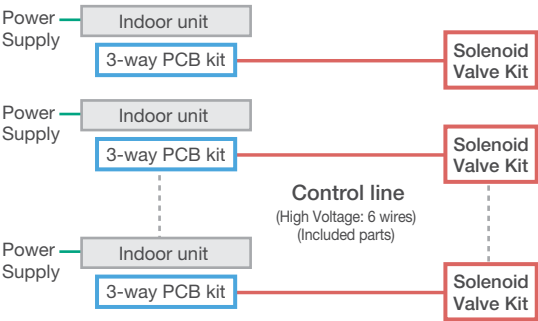

New Model /
Multiple Connection Type

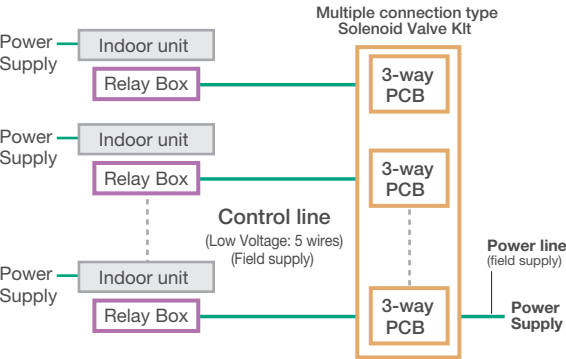

Simultaneous heating and cooling VRF system

3-WAY FSV-EX MF3 Series

Increased max. number of connectable indoor units

The 3-WAY MF3 series has four DC inverter outdoor units from 16HP as the basic models, and by combination of up to three units, an air-conditioning capacity of 8HP to 48HP can be set according to the user needs.

System (HP)	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48
Outdoor units	8	10	12	14	16	10	12	12	12	16	16	16	16	16	16	16	16	16	16	16	16
						8	8	10	12	10	12	14	16	10	12	12	16	16	16	16	16
														8	8	10	8	10	12	14	16
Connectable indoor units	15	19	22	27	30	34	38	41	46	49	52	52	52	52	52	52	52	52	52	52	52

Connectable indoor/outdoor unit capacity ratio up to 150%

Long piping design


Adaptable to various building types and sizes

Actual piping length : 200m

Max piping length : 500m

*1: 40 m if the outdoor unit is below the indoor unit.


Max. total length:500 m

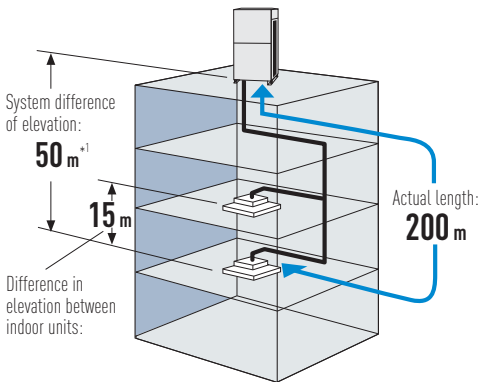


Excellent energy saving

The operation efficiency has been improved using highly efficient R410A refrigerant, new DC inverter compressor, and new heat exchanger design.

COOLING MF3 MF2

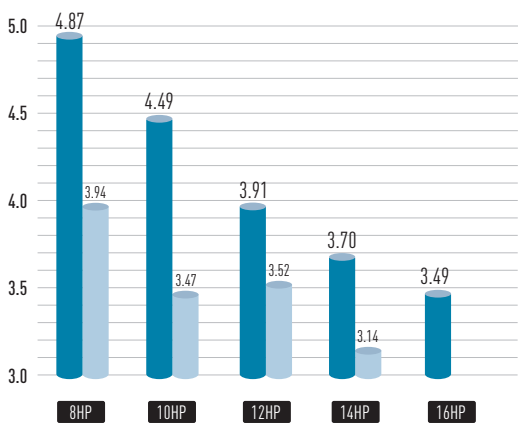


HEATING MF3 MF2

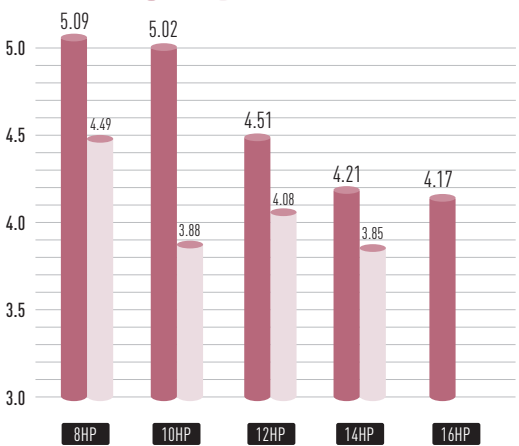

Up to 40m piping after first branch


Up to 52 units can be connected to one system. Flexible piping layout makes it easier to design systems for locations such as train stations, airports, schools and hospitals.

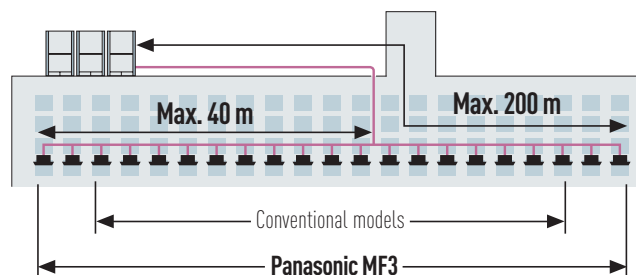

Extended operating range

Cooling operation range:

The cooling operation range has been extended to -10°C DB to $+52^{\circ}\text{C}$ DB by changing the outdoor fan to an inverter type.

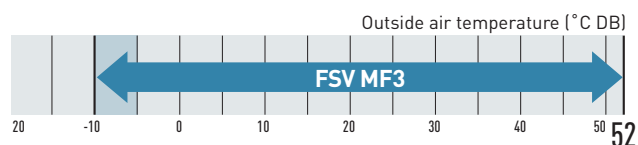


Heating operation range:

Stable heating operation even with an outside air temperature of -20°C WB

Wide temperature setting range

Wired remote control heating temperature setting range is 16 to 30°C

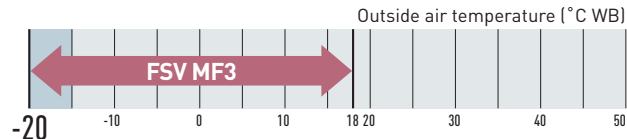

Remark: Cooling/heating capacity depend on indoor/outdoor temperature. Please refer technical databook.

Newly designed fan


Optimised air flow

Newly designed fan and bell-mouth reduces stress on the fan by dispersing air quickly. Thus, lower air resistance results in lower energy consumption.



Noise reduction

Turbulence (blue) can be suppressed and the unwanted noise can be reduced. Even though a high speed fan is utilised, the noise level is still very low.



Simultaneous heating and cooling VRF system

3-WAY FSV-EX MF3 Series

High external static pressure on condensers


With a newly designed fan, fan guard, motor, and casing, new models can be custom-installed on-site to provide up to 80 Pa of external static pressure. An air discharge duct prevents shortages of air circulation, allowing outdoor units to be installed on every floor of a building.



Fan




Fan Motor and Casing

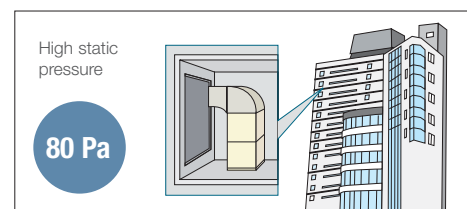

Extended compressor life by uniform compressor operation time

The total run-time of compressors are monitored by a built-in microcomputer, which ensures that operation times of all compressors within the same refrigerant circuit are balanced.

Compressors with histories showing shorter run times are selected first, ensuring equal wear and tear across all units and extended the working life of the system.



System example
[Case1]

A,B,C,D: DC inverter compressor

* Depend on accumulated operation time of each compressors.

* Compressor priority has possibility to be changed.

(e.g) Case1: A→C→B→D, Case2: C→A→D→B, Case3: A→C→D→B, Case4: C→A→B→D

Automatic backup operation in the case of compressor failure or outdoor unit malfunction

Except for 8, 10 & 12HP single unit installation

*Backup operation allows uninterrupted cooling or heating to continue whilst waiting for service.
Users should contact their authorised service centre as soon as fault occurs.

Even if a whole outdoor unit fails



The other outdoor unit can keep running

Even if a compressor in a single system fails



The other compressor can keep running


Automatic backup operation.



Flexible demand response


Demand response

Featuring inverter control technology, MF3 series systems are Demand Response Management (DRM) ready. With this control, power consumption at times of peak load can be set in three steps to deliver optimum performance. This helps to correspond with the local power management for reducing peak power consumption, and to reduce annual power consumption with minimal loss in comfort.

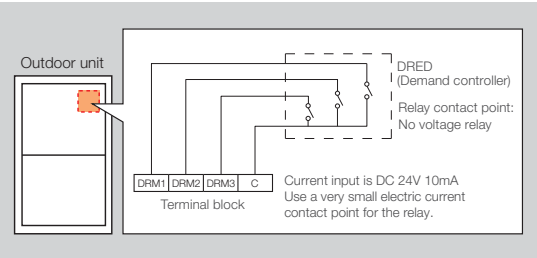

Demand control setting level and unit behavior image


It is possible to limit the operating current of MF3 series system to 3 stages (75%/50%/0%) according to the demand control signal sent from the building.

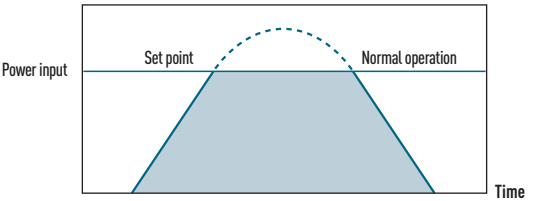

Terminal no. for demand section	Description
DRM3	Approx. 75% of rated current
DRM2	Approx. 50% of rated current
DRM1	Compressor off

Blue fin condenser outdoor unit

The anti-corrosion Blue Fin treatment of the heat exchanger provides greater resistance against corrosion. All models are equipped with Blue Fin condenser.

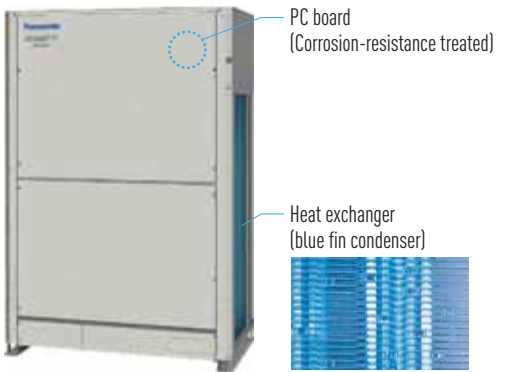


3-WAY FSV-EX MF3 Series

Appearance												
HP			8	10	12	14	16	18	20	22	24	26
Model name			U-8MF3R7	U-10MF3R7	U-12MF3R7	U-14MF3R7	U-16MF3R7	U-8MF3R7 U-10MF3R7	U-8MF3R7 U-12MF3R7	U-10MF3R7 U-12MF3R7	U-12MF3R7 U-12MF3R7	U-10MF3R7 U-16MF3R7
Power supply			380/400/415V/3-phase/50Hz 380/400V/3-phase/60									
Capacity	Cooling	kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	68.0	73.0
		BTU/h	76,500	95,600	114,300	136,500	153,600	170,600	191,100	209,900	232,100	249,100
	Heating	kW	25.0	31.5	37.5	45.0	50.0	56.0	63.0	69.0	76.5	81.5
		BTU/h	85,300	107,500	128,000	153,600	170,600	191,100	215,000	235,500	261,100	278,200
EER / COP	Cooling	W/W	4.87	4.49	3.91	3.70	3.49	4.67	4.24	4.16	3.89	3.82
	Heating	W/W	5.09	5.02	4.51	4.21	4.17	5.09	4.70	4.73	4.47	4.45
Dimensions	H x W x D	mm	1,842x1,180 x1,000	1,842x1,180 x1,000	1,842x1,180 x1,000	1,842x1,180 x1,000	1,842x1,180 x1,000	1,842x2,420 x1,000	1,842x2,420 x1,000	1,842x2,420 x1,000	1,842x2,420 x1,000	1,842x2,420 x1,000
Net weight		kg	264	265	289	337	337	529	553	554	578	602
Electrical ratings	Cooling	Running current A	7.52/7.14/6.88	10.4/9.88/9.52	13.9/13.2/12.7	18.2/17.3/16.7	21.3/20.2/19.5	17.7/16.8/16.2	21.3/20.3/19.5	24.2/23.0/22.1	28.3/26.9/25.9	31.5/30.0/28.9
		Power input kW	4.60	6.23	8.57	10.8	12.9	10.7	13.2	14.8	17.5	19.1
	Heating	Running current A	8.02/7.62/7.34	10.5/9.95/9.59	13.4/12.8/12.3	18.1/17.2/16.5	20.0/19.0/18.3	18.2/17.3/16.6	21.7/20.6/19.8	23.9/22.7/21.8	27.6/26.3/25.3	30.6/29.0/28.0
		Power input kW	4.91	6.27	8.32	10.7	12.0	11.0	13.4	14.6	17.1	18.3
Air flow rate		m³/h	12,600	13,200	13,920	13,920	13,920	25,800	26,520	27,120	27,840	27,120
		L/s	3,500	3,667	3,867	3,867	3,867	7,167	7,367	7,533	7,733	7,533
Refrigerant amount at shipment		kg	9.8	9.8	11.8	11.8	11.8	19.6	21.6	21.6	23.6	21.6
Piping connections	Suction pipe	mm (inches)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø31.75 (Ø1-1/4)
	Discharge pipe	mm (inches)	Ø15.88 (Ø5/8)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø22.22 (Ø7/8)	Ø25.40 (Ø1)	Ø25.40 (Ø1)	Ø25.40 (Ø1)
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø12.70 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø19.05 (Ø3/4)
	Balance pipe	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Ambient temperature operating range												
Sound pressure level	Normal mode	dB (A)	54.0	57.0	60.0	61.0	62.0	59.0	61.0	62.0	63.0	63.5
	Silent mode	dB (A)	51.0	54.0	57.0	58.0	59.0	56.0	58.0	59.0	60.0	60.5
GLOBAL REMARKS	Rated conditions:		Cooling	Heating								
	Indoor air temperature		27°C DB / 19°C WB	20°C DB								
	Outdoor air temperature		35°C DB	7°C DB / 6°C WB								

These specifications are subject to change without notice.

* For mixed heating and cooling operation with an outdoor temperature in excess of 24°C DB, please use 50% or more of the horsepower of the outdoor unit for cooling operation.

System example

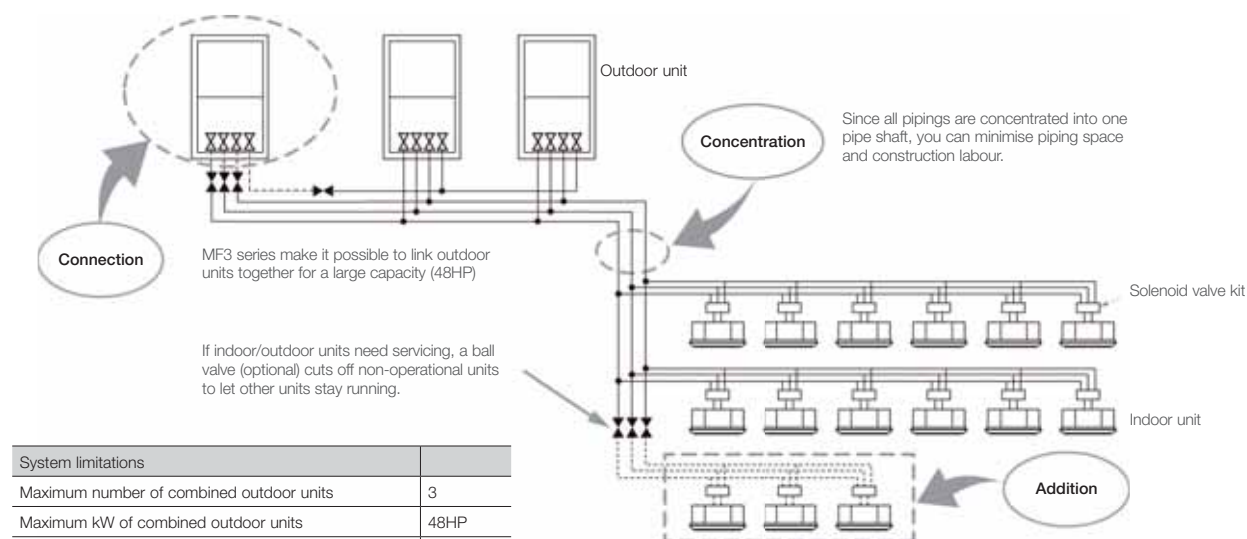


If your indoor capacity load changes in the future, it's easy to add on both indoor and outdoor units using the same pipings.

If the additional installment of outdoor and indoor units is expected, the size of refrigerant piping should be decided according to the total capacity after the addition.

28	30	32	34	36	38	40	42	44	46	48
U-12MF3R7 U-16MF3R7	U-14MF3R7 U-16MF3R7	U-16MF3R7 U-16MF3R7	U-8MF3R7 U-10MF3R7 U-16MF3R7	U-8MF3R7 U-12MF3R7 U-16MF3R7	U-10MF3R7 U-12MF3R7 U-16MF3R7	U-8MF3R7 U-16MF3R7 U-16MF3R7	U-10MF3R7 U-16MF3R7 U-16MF3R7	U-12MF3R7 U-16MF3R7 U-16MF3R7	U-14MF3R7 U-16MF3R7 U-16MF3R7	U-16MF3R7 U-16MF3R7 U-16MF3R7

78.5	85.0	90.0	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0
267,900	290,100	307,200	327,600	344,700	365,200	385,700	402,700	423,200	443,700	460,800
87.5	95.0	100.0	108.0	113.0	119.0	127.0	132.0	138.0	145.0	150.0
298,600	324,200	341,300	368,600	385,700	406,100	433,400	450,500	471,000	494,900	511,900
3.65	3.59	3.49	4.00	3.87	3.84	3.69	3.69	3.58	3.55	3.49
4.31	4.19	4.17	4.56	4.45	4.47	4.29	4.34	4.25	4.18	4.17
1,842x2,420 x1,000	1,842x2,420 x1,000	1,842x2,420 x1,000	1,842x3,660 x1,000	1,842x3,660 x1,000	1,842x3,660 x1,000	1,842x3,660 x1,000	1,842x3,660 x1,000	1,842x3,660 x1,000	1,842x3,660 x1,000	1,842x3,660 x1,000
626	674	674	866	890	891	938	939	963	1,011	1,011
35.1/33.4/32.2	39.6/37.6/36.2	42.6/40.5/39.0	39.6/37.7/36.3	42.6/40.5/39.0	46.1/43.8/42.2	50.5/48.0/46.3	52.8/50.2/48.4	56.5/53.7/51.8	61.1/58.1/56.0	63.9/60.7/58.
21.5	23.7	25.8	24.0	26.1	27.9	30.6	32.0	34.6	36.6	38.7
33.5/31.8/30.7	37.9/36.0/34.7	40.1/38.1/36.7	39.6/37.6/36.2	41.9/39.8/38.4	43.9/41.7/40.2	49.4/49.4/46.9	50.8/48.2/46.5	53.7/51.0/49.1	57.9/55.0/53.0	60.1/57.1/55.0
20.3	22.7	24.0	23.7	25.4	26.6	29.6	30.4	32.5	34.7	36.0
27,840	27,840	27,840	39,720	40,440	41,040	40,440	41,040	41,760	41,760	41,760
7,733	7,733	7,733	11,033	11,233	11,400	11,233	11,400	11,600	11,600	11,600
23.6	23.6	23.6	31.4	33.4	33.4	33.4	33.4	35.4	35.4	35.4
Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø38.1 (Ø1-1/2)	Ø38.1 (Ø1-1/2)	Ø38.1 (Ø1-1/2)	Ø38.1 (Ø1-1/2)	Ø38.1 (Ø1-1/2)	Ø38.1 (Ø1-1/2)	Ø38.1 (Ø1-1/2)
Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø28.58 (Ø1-1/8)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)	Ø31.75 (Ø1-1/4)
Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)	Ø19.05 (Ø3/4)
Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
Cooling/Dry: -10°C~+52°C (DB). Heating: -20°C~+18°C (WB) Simultaneous operation: -10°C~+24°C (DB)										
64.5	64.5	65.0	64.0	64.5	65.0	65.5	66.0	66.5	66.5	67.0
61.5	61.5	62.0	61.0	61.5	62.0	62.5	63.0	63.5	63.5	64.0

Dimensions

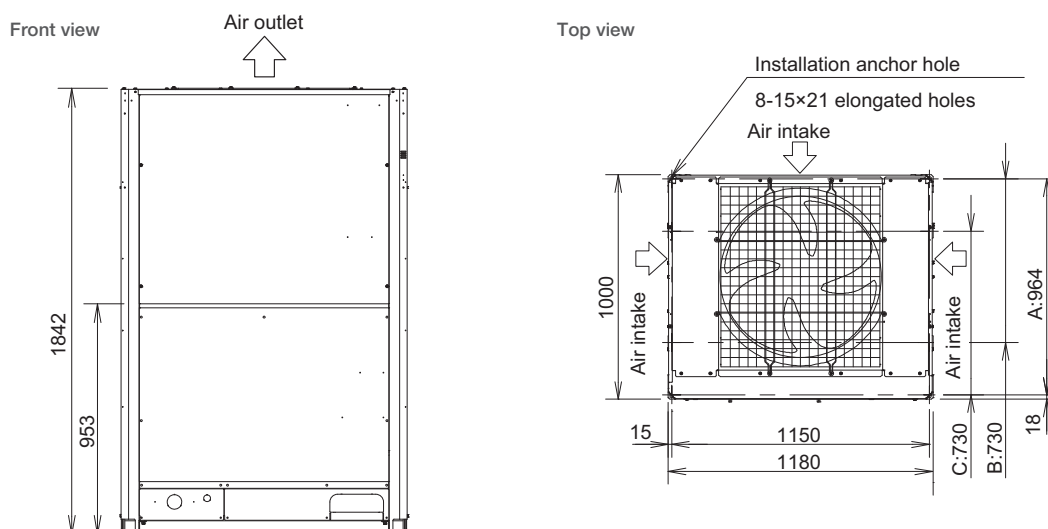


unit: mm

Piping design

Select the installation location so that the length and size of refrigerant tubing are within the allowable range shown in the figure below.

1. Main tubing length (maximum tubing size) $LM = LA + LB \dots$
2. Main distribution tubes $LC - LH$ are selected according to the capacity after the distribution joint.
3. The outdoor connection main tubing (LO portion) is determined by the total capacity of the outdoor units that are connected to the tube ends.
4. Sizes of indoor unit connection tubing $\ell 1 - \ell 52$ are determined by the connection tubing sizes on the indoor units.

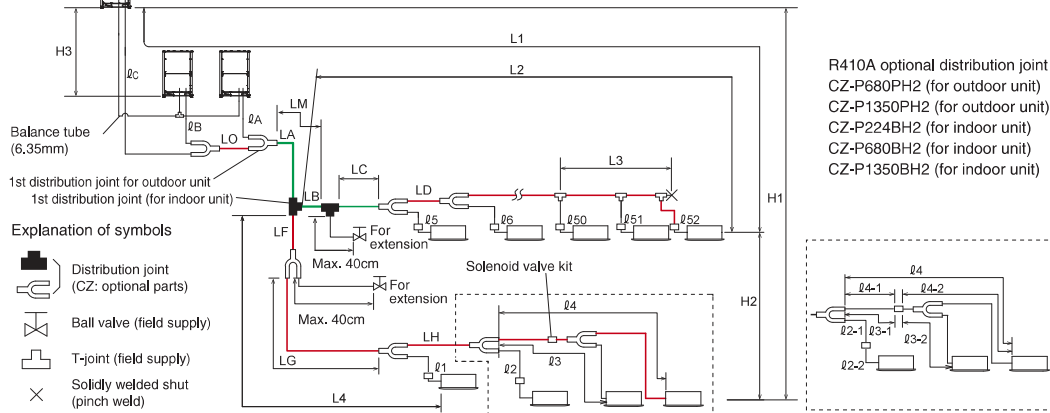

* Be sure to use special R410A distribution joints (CZ: optional parts) for outdoor unit connections and tubing branches.

Table 2 Ranges that Apply to Refrigerant Tubing Lengths and to Differences in Installation Heights

Ranges that apply to refrigerant piping lengths and to differences in installation heights

Item	Mark	Contents	Length (m)
Allowable tubing length	L1	Max. tubing length	Actual length $\leq 200^{*2}$
			Equivalent length $\leq 210^{*2}$
	$\Delta L (L2 - L4)$	Difference between max. length and min. length from the 1st distribution joint	$\leq 50^{*4}$
	LM	Max. length of main tubing (at maximum size) *Even after 1st distribution joint, LM is allowed if at maximum tubing length.	∞^{*3}
	$\ell 1, \ell 2 \sim \ell 52$	Max. length of each distribution tube	$\leq 50^{*5}$
	$L1 + \ell 1 + \ell 2 \sim \ell 51 + \ell A + \ell B + LF + LG + LH$	Total max. tubing length including length of each distribution tube (only liquid tube)	≤ 500
	$\ell A, \ell B + LO, \ell C + LO$	Maximum tubing length from outdoor's 1st distribution joint to each outdoor unit	≤ 10
Allowable elevation difference	H1	When outdoor unit is installed higher than indoor unit	≤ 50
		When outdoor unit is installed lower than indoor unit	≤ 40
	H2	Max. difference between indoor units	≤ 15
	H3	Max. difference between outdoor units	≤ 4
Allowable length of joint tubing	L3	T-joint tubing (field-supply); Max. tubing length between the first T-joint and solidly welded shut end point	≤ 2

L = Length, H = Height

- 1: The outdoor connection main tubing (LO portion) is determined by the total capacity of the outdoor units that are connected to the tube ends.
- 2: If the longest tubing length (L1) exceeds 90 m (equivalent length), increase the sizes of the main tubes (LM) by 1 rank for the suction tubes, discharge tubes and liquid tubes. Use a field supply reducer. Select the tube size from the table of main tubing sizes (Table 3) and from the table of refrigerant tubing sizes (Table 8).
- 3: If the longest main tubing length (LM) exceeds 50 m, increase the main tubing size at the portion before 50 m by 1 rank for the suction tubes and discharge tubes. Use a field supply reducer. Determine the length less than the limitation of allowable maximum tubing length. For the portion that exceeds 50 m, set based on the main tubing size (LA) listed in Table 3.
- 4: If the tubing length marked "L" (L2-L4) exceeds 40 m, increase the tubing size at the portion after the 1st distribution joint by 1 rank for the liquid tube, suction tube and discharge tube. Refer to the Technical Data for the details.
- 5: If any of the tubing length exceeds 30m, increase the size of the suction tubes, discharge tubes and liquid tubes by 1 rank.

System limitations

Max. number of combined outdoor units	3
Max. HP of combined outdoor units	135kW(48HP)
Max. number of connectable indoor units	52
Indoor/outdoor unit capacity ratio	50-150%

*1: In the case of 24 HP (type 68.0 kW) or smaller units, the number is limited by the total capacity of the connected indoor units.

*2: Up to 3 units can be connected if the system has been extended.

*3: It is strongly recommended that you choose the unit so the load can become between 50 and 130 %.

Additional refrigerant charge

Liquid piping size mm (inches)	Amount of refrigerant charge/m (g/m)
ø6.35 (ø1/4)	26
ø9.52 (ø3/8)	56
ø12.7 (ø1/2)	128
ø15.88 (ø5/8)	185
ø19.05 (ø3/4)	259
ø22.22 (ø7/8)	366

Necessary Amount of Additional Refrigerant Charge per meter, According to Discharge Tubing Size

Discharge tubing size	mm	ø12.7	ø15.88	ø19.05	ø22.22	ø25.4	ø28.58	ø31.75	ø38.1
Additional amount	g/m	12	21	31	41	55	71	89	126

*Additional refrigerant charge amount of discharge tubing should be less than 9,000g.

Distribution joint kits

Remarks	Model name	Cooling capacity after distribution
For outdoor unit	1. CZ-P680PH2	24HP or less
	2. CZ-P1350PH2	42HP or less
For indoor unit	3. CZ-P224BH2	8HP or less
	4. CZ-P680BH2	24HP or less
	5. CZ-P1350BH2	42HP or less

Refrigerant piping

Piping size mm (inches)			
Material O		1/2 H, H material	
Outer diameter	Wall thickness	Outer diameter	Wall thickness
ø6.35 (ø1/4)	t 0.8 mm	ø22.22 (ø7/8)	t 1.0 mm
ø9.52 (ø3/8)	t 0.8 mm	ø 25.4 (ø1)	t 1.0 mm
ø12.7 (ø1/2)	t 0.8 mm	ø 28.58 (ø1-1/8)	t 1.0 mm
ø15.88 (ø5/8)	t 1.0 mm	ø 31.75 (ø1-1/4)	t 1.1 mm
ø19.05 (ø3/4)	t 1.0 mm	ø 38.1 (ø1-1/2)	t 1.15 mm
		ø 41.28 (ø1-5/8)	t 1.20 mm

Note: When pipe bending is to be performed, the bending radius shall be at least 4 times the outer diameter. Also, take sufficient care to prevent pipe collapse and damage at the time of bending.

Refrigerant Branch Pipes (optional accessories) for 3-Way MF3 Series

Optional Distribution Joint Kits


See the installation instructions packaged with the distribution joint kit for the installation procedure.

Model name	capacity after distribution JOINT	Remarks
1. CZ-P680PH2	68.0 kW or less	For outdoor unit
2. CZ-P1350PH2	greater than 68.0 kW and no more than 118.0 kW	For outdoor unit
3. CZ-P224BH2	22.4 kW or less	For indoor unit
4. CZ-P680BH2	greater than 22.4 kW and no more than 68.0 kW	For indoor unit
5. CZ-P1350BH2	greater than 68.0 kW and no more than 118.0 kW	For indoor unit


1. CZ-P680PH2

Use: For outdoor unit (Capacity after distribution joint is 68.0 kW or less.)


SUCTION PIPE



DISCHARGE PIPE



LIQUID PIPE




Unit: mm

Dimensions for connections of each part										
Position	A	B	C	D	E	F	G	H	I	J
Dimension (mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
Dimension (inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4


2. CZ-P1350PH2

Use: For outdoor unit (Capacity after distribution joint is greater than 68.0 kW and no more than 118.0 kW.)


SUCTION PIPE

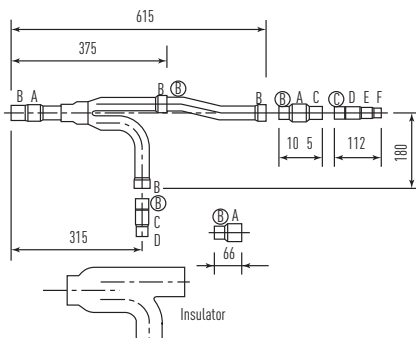

DISCHARGE PIPE

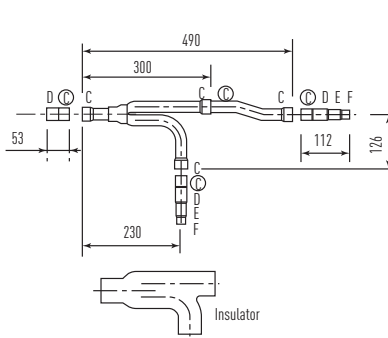

LIQUID PIPE



Unit: mm


Dimensions for connections of each part										
Position	A	B	C	D	E	F	G	H	I	J
Dimension (mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
Dimension (inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

Example: (F below indicates inner diameter. Ⓢ below indicates outer diameter.)


3. CZ-P224BH2

Use: For indoor unit (Capacity after distribution joint is 22.4 kW or less.)


SUCTION PIPE



DISCHARGE PIPE



LIQUID PIPE




Unit: mm

Dimensions for connections of each part										
Position	A	B	C	D	E	F	G	H	I	J
Dimension	(mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52
	(inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8


4. CZ-P680BH2

Use: For indoor unit (Capacity after distribution joint is greater than 22.4 kW and no more than 68.0 kW.)


SUCTION PIPE



DISCHARGE PIPE



LIQUID PIPE




Unit: mm

Dimensions for connections of each part										
Position	A	B	C	D	E	F	G	H	I	J
Dimension	(mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52
	(inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8


5. CZ-P1350BH2

Use: For indoor unit (Capacity after distribution joint is greater than 68.0 kW and no more than 118.0 kW.)

SUCTION PIPE / DISCHARGE PIPE

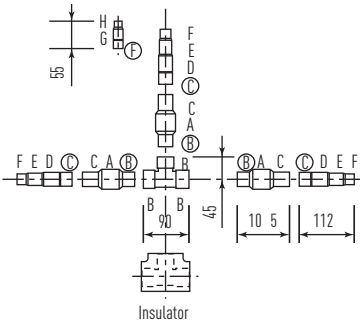

LIQUID PIPE



Unit: mm

Dimensions for connections of each part										
Position	A	B	C	D	E	F	G	H	I	J
Dimension	(mm)	Ø38.10	Ø31.75	Ø28.58	Ø25.40	Ø22.22	Ø19.05	Ø15.88	Ø12.70	Ø9.52
	(inches)	Ø1-1/2	Ø1-1/4	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8

2-WAY Mini-FSV LE Series

High External Static Pressure 35Pa

High external static pressure 35Pa


LE1 LE2

When unit is installed on a narrow balcony and exposed to the sun, the fence at the front side would restrict hot air from being discharged. Heat accumulated in an enclosure can cause over-heating. This could potentially result in damage or shorten the product's life span. A high external static pressure sends the air further away from the outdoor unit and through the fence. This provides better air circulation and distribution.



Previous model - Low pressure

When the pressure is low, hot air will accumulate in the unit thus affecting its work performance and of the unit above it as well.

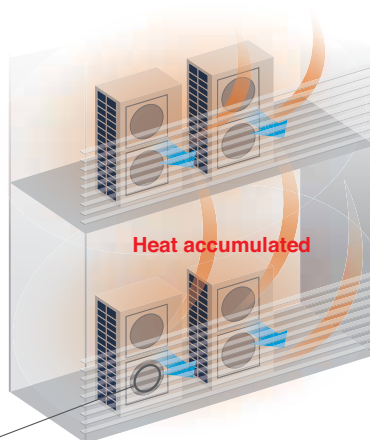


Previous fan

High electrostatic pressure disrupted the airflow of the previous fan, lowering the air pressure and preventing hot air from being discharged far enough.



LE series - High pressure

But with a high pressure of 35Pa, hot air is sent further away preventing overheating inside the outdoor unit enclosure.

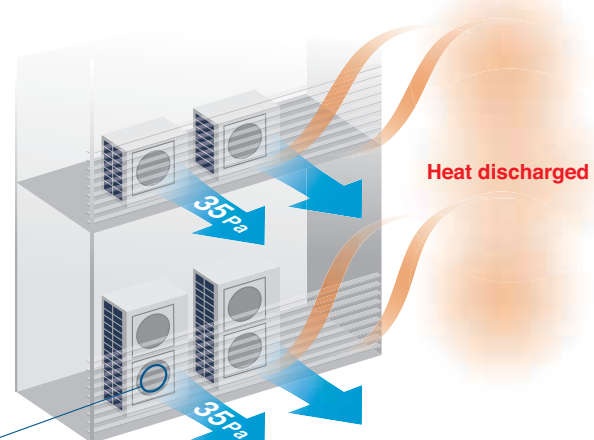

LE series fan

The new LE Series fan has ribs extending near the blade tips, in a structure that resists deformation. During high electrostatic pressure, this blade shape suppresses disruptions in the airflow, and a high air pressure of 35 Pa discharges the hot air a sufficient distance.




Long piping design length for greater design flexibility

LE1 LE2

Adaptable to various building types and sizes

Actual piping length **150m**
(equivalent piping length **175m**)


Max. total piping length: 300m



LE 1

Actual piping length **150m**
(equivalent piping length **175m**)

Max. total piping length: 180m



LE 2

*1: 40m if the outdoor unit is below the indoor unit.

Refrigerant chargeless up to 50m

LE2


Up to 50m of piping without additional gas charging makes installation flexible, easy and hassle-free.

A 50m pipe length is sufficient for most residential and small business buildings. When total piping length exceeds 50m, additional refrigerant charge is required.

Chargeless
Max. total piping length: 50m

Charge
Max. total piping length: 180m
(Actual length: 150m)


[Sample piping lay-out]



Compact design

LE1 LE2

Also, since Mini VRF LE Series is a single unit, it is possible to install the unit in more various places compared to the Single Split system.

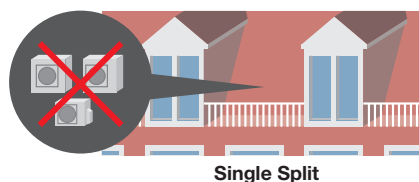

Single Split

Mini-FSV

Short height of 996mm

LE2

In addition to raising efficiency, we have made the outdoor unit more compact. It can now be installed in places that were previously too small.



Can be installed in the small space



Up to 13 indoor units connectable

LE1 LE2

An expansion from Panasonic VRF line up, the mini FSV is compatible with the same indoor units and controls as the rest of the FSV range.



Up to 13 (LE1) / 9* (LE2) indoor units

← Refrigerant pipe → Control line

* Use any of the 22 type indoor models. Depending on the size or type of indoor unit, tubing size shall be changed. Please refer manuals for details.

* Diversity ration 50-130%


* 6 HP only; 4 HP for 7 units, 5 HP for 8 units.

2-WAY Mini-FSV LE Series

High efficiency


LE1 LE2

The operation efficiency has been improved using highly efficient R410A refrigerant, a DC Inverter compressor, DC motor and a heat exchanger design.

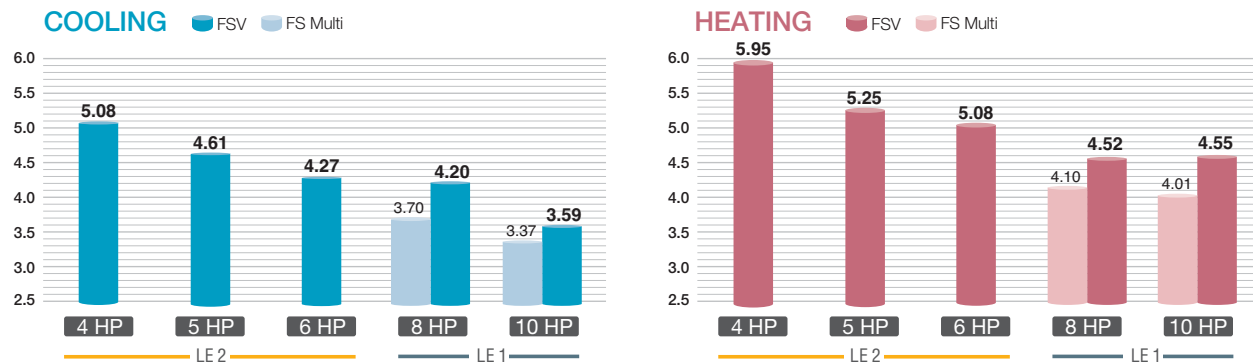

Energy savings design

LE1 LE2

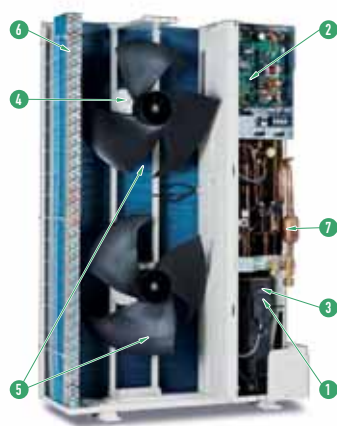

- 1 Panasonic Inverter Compressor**
A large-capacity inverter compressor has been adopted. The inverter compressor is superior in performance with improved partial-load capacity.
- 2 Printed Circuit Board**
The number of PCB is 2 pieces for making maintenance easier.
- 3 Accumulator**
A large accumulator has been adopted to maintain compressor reliability because of the increased refrigerant quantity, which allows an extended max piping length.
- 4 DC Fan Motor**
Checking load and outside temperature, the DC motor is controlled for optimum air volume.
- 5 Newly Designed Fan**
The newly designed fan blades have been developed to inhibit air turbulence and to increase efficiency. As fan diameter has been increased its size, the air volume has been increased whilst maintaining a same sound level.
- 6 Heat Exchanger & Copper Tubes**
The heat exchanger size and the copper tube sizes in the heat exchanger have been redesigned to increase efficiency.
- 7 Oil Separator**
A centrifugal separator has been adopted to improve oil separation efficiency and reduce refrigerant pressure loss.


Flexible demand response with the optional terminal block

LE1 LE2

Demand Response

Featuring inverter control technology, all Panasonic Mini FSV systems are Demand Response Management (DRM) ready. With this control, power consumption at times of peak load can be set in three steps to deliver optimum performance. This helps to reduce annual power consumption with minimal loss in comfort.


*Terminal block supplied as optional kit. (CZ-CAPDC2) Please ask your dealer.

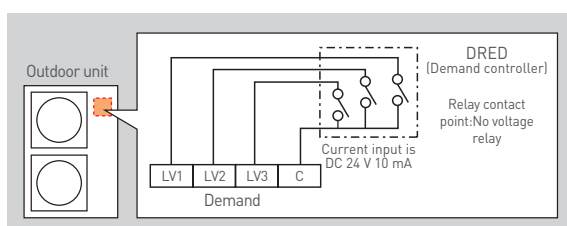

Flexible Demand Response with the CZ-CAPDC2^{*1}

Setting is possible as 0% or in the range from 40 to 100% (in steps of 5%). At the time of shipping, setting has been done to the three steps of 0%, 70% and 100%.


^{*1} An outdoor Seri-Para I/O unit (CZ-CAPDC2) is required for demand input signal.
* Demand timer setting for high spec remote controller is available.

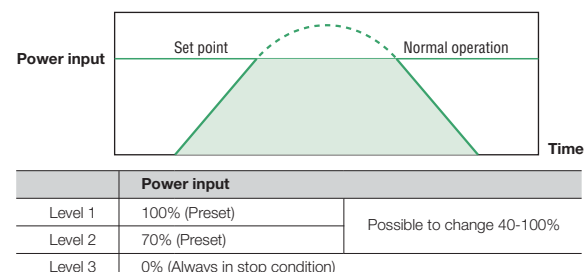

Wide operating range

LE1 LE2

- Cooling operation is possible even when outdoor temperature is as low as -10°C DB.
- Cooling operation is possible even when outdoor temperature is as high as 46°C DB.
- Heating operation is possible even when outdoor temperature is as low as -20°C WB.

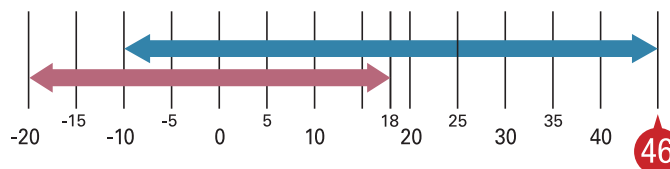

■ Cooling: -10°C DB ~ 46°C DB ■ Heating: -20°C WB ~ 18°C WB
 * For further information please refer to the capacity tables in the Technical Data Book.

The remote controller temperature can be set from 18°C up to 30°C (Cooling), 16°C up to 30°C (Heating)*1.

*1 Depending on the type of remote controller.

Blue fin condenser

LE1 LE2

The anti-corrosion Blue Fin treatment of the heat exchanger provides greater resistance against corrosion. All models are equipped with Blue Fin condenser.



Heat exchanger
(blue fin condenser)



[Rear view]


High durability outdoor unit

LE1 LE2

Corrosion-resistance treated for high resistance to rust and salty air to assure long-lasting performance.

Note: Selecting this unit does not completely eliminate the possibility of rust developing. For details concerning unit installation and maintenance, please consult an authorised dealer.

* Specific model with suffix "E" has this treatment.

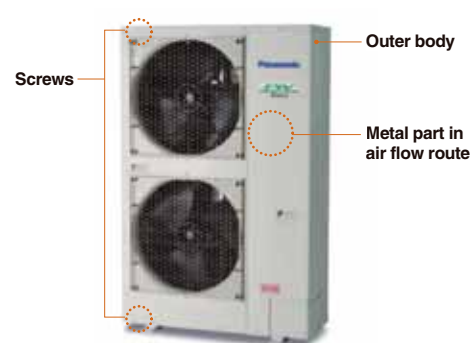

Quiet operation mode

LE1 LE2

- Quiet operation mode reduces outdoor unit operating sound down to 7dB than rating.
- 3-step set point is available.
- External input signal is also available.

* Timer setting of quiet operation mode is available in High-spec Remote Controller (CZ-RTC5B/CZ-RTC6 series).



2-WAY Mini-FSV LE2 Series

HP			4	4	5	5	6	6
Model name			U-4LE2H4	U-4LE2H7	U-5LE2H4	U-5LE2H7	U-6LE2H4	U-6LE2H7
Power supply			220/230/240V/ 1-phase/50Hz 220/230V/1-phase/60Hz	380/400/415V/ 3-phase/50Hz 380/400V/3-phase/60Hz	220/230/240V/ 1-phase/50Hz 220/230V/1-phase/60Hz	380/400/415V/ 3-phase/50Hz 380/400V/3-phase/60Hz	220/230/240V/ 1-phase/50Hz 220/230V/1-phase/60Hz	380/400/415V/ 3-phase/50Hz 380/400V/3-phase/60Hz
Voltage			220V 230V 240V	380V 400V 415V	220V 230V 240V	380V 400V 415V	220V 230V 240V	380V 400V 415V
Capacity	Cooling	kW	12.1	12.1	14.0	14.0	15.5	15.5
		BTU/h	41,300	41,300	47,800	47,800	52,900	52,900
	Heating	kW	12.5	12.5	16.0	16.0	16.5	16.5
		BTU/h	42,700	42,700	54,600	54,600	56,300	56,300
EER/COP	Cooling	W/W	5.08	5.08	4.61	4.61	4.27	4.27
	Heating	W/W	5.95	5.95	5.25	5.25	5.08	5.08
Dimensions	H x W x D	mm	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	106	106	106	106	106	106
Electrical ratings	Cooling	Running current	A	11.90 11.40 10.90	3.89 3.69 3.56	15.20 14.50 13.90	4.91 4.67 4.50	18.10 17.30 16.60
		Power input	kW	2.38 2.38 2.38	2.38 2.38 2.38	3.04 3.04 3.04	3.04 3.04 3.04	3.63 3.63 3.63
	Heating	Running current	A	10.60 10.10 9.70	3.47 3.29 3.18	15.20 14.60 14.0	4.93 4.68 4.51	16.20 15.50 14.90
		Power input	kW	2.10 2.10 2.10	2.10 2.10 2.10	3.05 3.05 3.05	3.05 3.05 3.05	3.25 3.25 3.25
Starting current		A	1	1	1	1	1	1
Air flow rate		m ³ / min	69	69	72	72	74	74
		L/s	1,150	1,150	1,200	1,200	1,233	1,233
Refrigerant amount at shipment		kg	R410A 6.70	R410A 6.70	R410A 6.70	R410A 6.70	R410A 6.70	R410A 6.70
Piping connection	Gas pipe	mm (inches)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
Ambient temperature operating range			Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB	Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB	Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB	Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB	Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB	Cooling: -10°CDB~+46°CDB, Heating: -20°CWB~+18°CWB
Sound pressure level (Cooling)	Normal mode	dB(A)	52.0	52.0	53.0	53.0	54.0	54.0
	Silent mode (3)	dB(A)	45.0	45.0	46.0	46.0	47.0	47.0
Sound power level (Cooling)	Normal mode	dB	69.0	69.0	71.0	71.0	73.0	73.0
Global remarks	Rated conditions:		Cooling	Heating				
	Indoor air temperature		27°C DB / 19°C WB	20°C DB				
	Outdoor air temperature		35°C DB	7°C DB / 6°C WB				


These specifications are subject to change without notice.
High durable model (with suffix "E") has same specifications.

Dimensions


U-4LE2H4 / U-4LE2H7

U-5LE2H4 / U-5LE2H7



U-6LE2H4 / U-6LE2H7

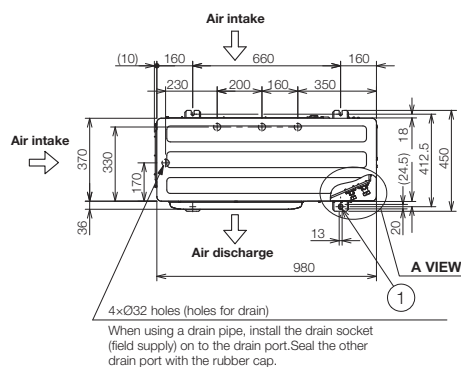

①	Mounting hole (4-R6.5), anchor bolt : M10
②	Refrigerant tubing (liquid tube), flared connection (Ø9.52)
③	Refrigerant tubing (gas tube), flared connection (Ø15.88)
④	Refrigerant tubing port
⑤	Electrical wiring port (Ø13)
⑥	Electrical wiring port (Ø22)
⑦	Electrical wiring port (Ø27)
⑧	Electrical wiring port (Ø35)



A VIEW

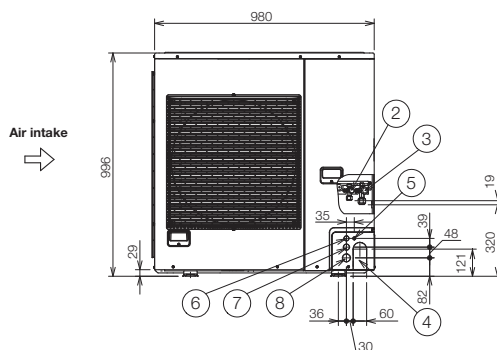

Z VIEW

Unit: mm

2-WAY Mini-FSV LE1 Series


HP			8			10		
Model name			U-8LE1H7			U-10LE1H7		
Power supply			380/400/415V/3-phase/50Hz 380/400V/3-phase/60Hz			380/400/415V/3-phase/50Hz 380/400V/3-phase/60Hz		
Voltage			380V	400V	415V	380V	400V	415V
Capacity	Cooling	kW	22.4			28.0		
		BTU/h	76,500			95,600		
	Heating	kW	25.0			28.0		
		BTU/h	85,300			95,600		
EER/COP	Cooling	W/W	4.20			3.59		
	Heating	W/W	4.52			4.55		
Dimensions (H/W/D)		mm	1,500 x 980 x 370			1,500 x 980 x 370		
Net weight		kg	132			133		
Electrical ratings	Cooling	Running current A	8.70	8.25	7.95	12.7	12.1	11.7
		Power input kW	5.33	5.33	5.33	7.8	7.80	7.80
	Heating	Running current A	9.05	8.60	8.25	10.0	9.55	9.20
		Power input kW	5.53	5.53	5.53	6.15	6.15	6.15
Starting current		A	1			1		
Air flow rate		m³ / min	150			160		
		L/s	2,500			2,666		
Refrigerant amount at shipment		kg	R410A 6.30			R410A 6.60		
Piping connection	Gas pipe	mm (inches)	Ø19.05 (Ø3/4)			Ø22.22 (Ø7/8)		
	Liquid pipe	mm (inches)	Ø9.52 (Ø3/8)			Ø9.52 (Ø3/8)		
Ambient temperature operating range			Cooling:-10°CDB~+46°CDB, Heating:-20°CWB~+18°CWB			Cooling:-10°CDB~+46°CDB, Heating:-20°CWB~+18°CWB		
Sound pressure level (Cooling)	Normal mode	dB(A)	59.0			62.0		
	Silent mode (3)	dB(A)	52.0			55.0		
Sound power level (Cooling)		Normal mode dB	80.0			83.0		

Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB	7°C DB / 6°C WB

These specifications are subject to change without notice.
High durable model (with suffix "E") has same specifications.

Dimensions


U-8LE1H7 / U-10LE1H7

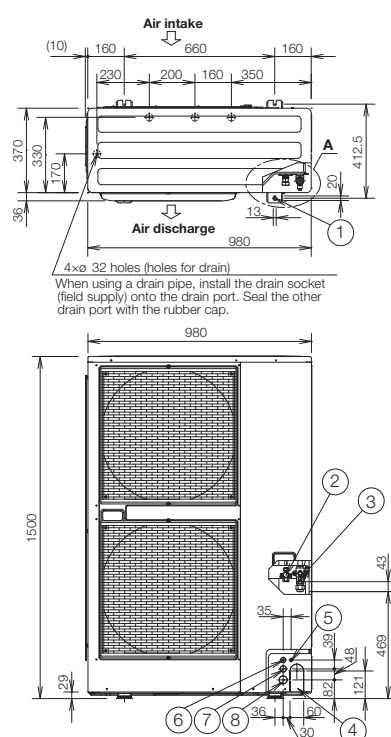


- ① Mounting hole (4-R6.5), anchor bolt : M10
- ② Refrigerant tubing (liquid tube), flared connection (ø9.52) for 8-10 HP finally.
- ③ Refrigerant tubing (gas tube), flared connection (ø19.05)
- ④ Refrigerant tubing port
- ⑤ Electrical wiring port (ø13)
- ⑥ Electrical wiring port (ø22)
- ⑦ Electrical wiring port (ø27)
- ⑧ Electrical wiring port (ø35)

For U-10LE1H7

The tubing of the gas main has a diameter of ø22.22, but the connection to the service valve of the outdoor unit has a diameter of ø19.05, so a flare has to be used. Consequently, be sure to use the enclosed joint tube B and joint tube A in making connections (brazing).



A VIEW



Unit: mm

2-WAY Mini-FSV LE2 Series


Distribution Joint Kits

CZ-P160BK2


Use: For indoor unit (Capacity after distribution joint is 22.4 kW or less.)*

* In case the total capacity of indoor units connected after distribution exceeds the total capacity of the outdoor units, select the distribution piping size for the total capacity of the outdoor units.

GAS PIPING

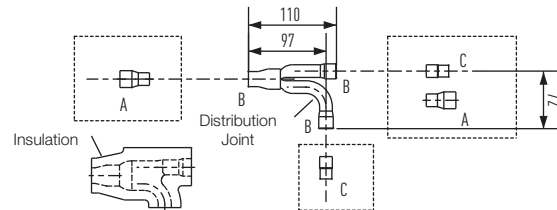

LIQUID PIPING

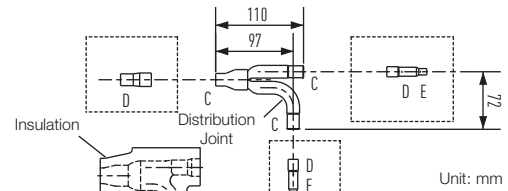

Unit: mm

Size of connection point on each part (Shown are inside diameters of piping)					
Size	Part A	Part B	Part C	Part D	Part E
(mm)	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
(inches)	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

Wiring System Diagrams (LE2/LE1)


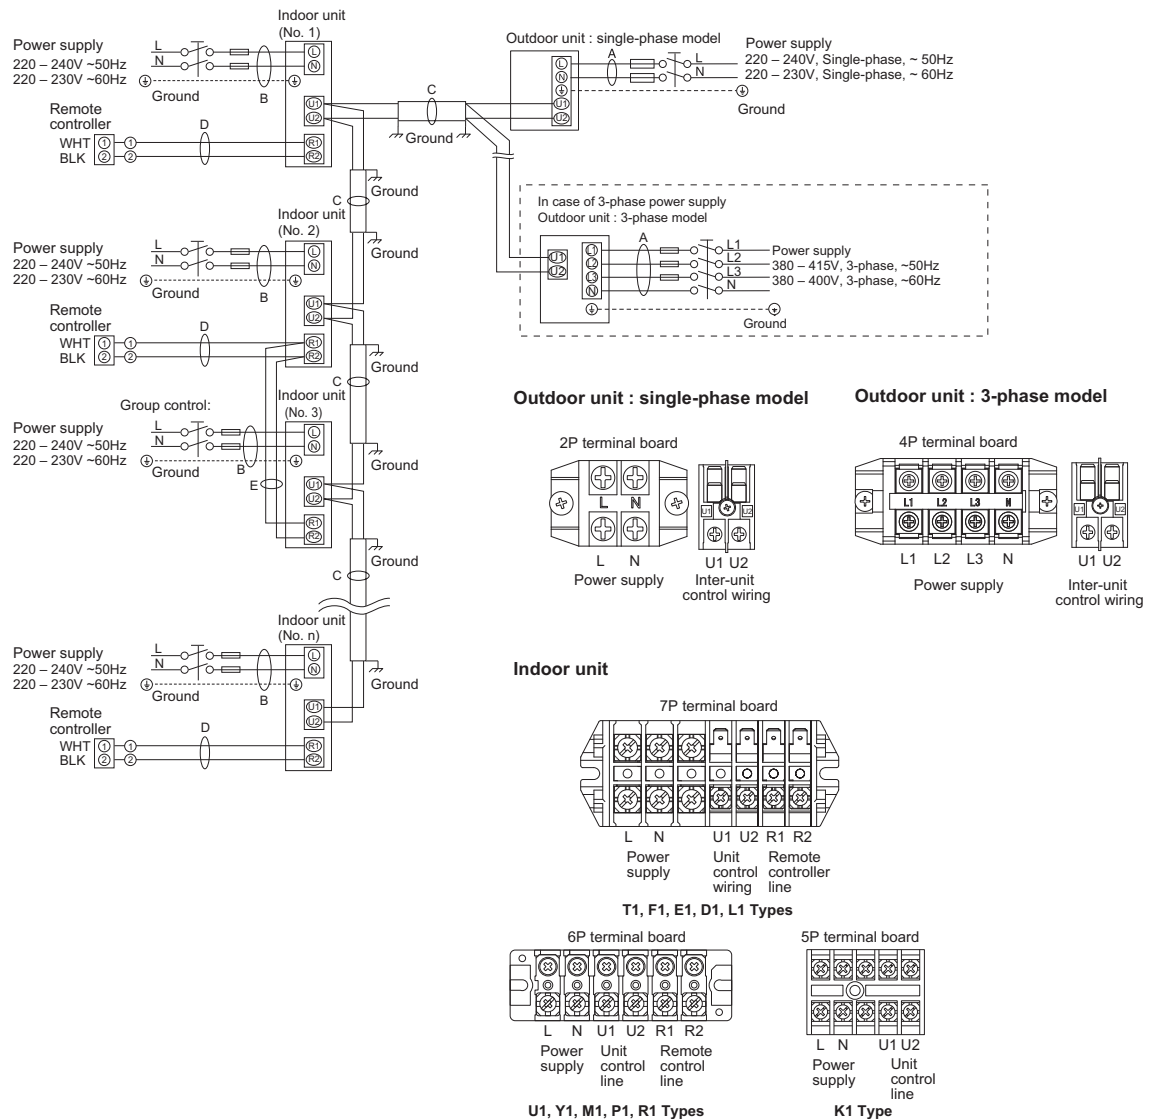


Fig. 2-1

Piping Design

Select the installation location so that the length and size of refrigerant piping are within the allowable range shown in the figure below.

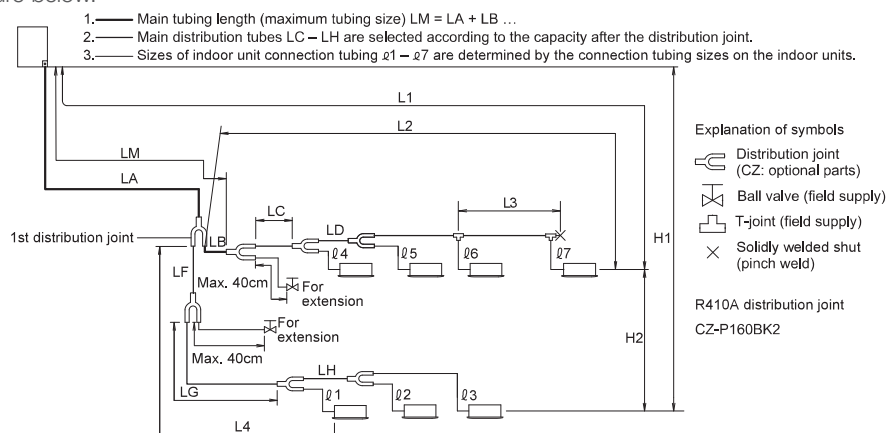

Ranges that Apply to Refrigerant Piping Lengths and to Differences in Installation Heights

Items	Mark	Contents	Length (m)
Allowable piping length	L1	Max. piping length	Actual length ≤ 150 Equivalent length ≤ 175
	ΔL ($L2 - L4$)	Difference between max. length and min. length from the 1st distribution joint	≤ 50
	LM	Max. length of main piping (at maximum size) *Even after 1st distribution joint, LM is allowed if at maximum piping length.	—
	$\phi 1, \phi 2 \sim \phi 7$	Max. length of each distribution pipe	≤ 50
	$L1 + \phi 1 + \phi 2 \sim \phi 6 + LF + LG + LH$	Total max. piping length including length of each distribution pipe (only liquid piping)	≤ 180
Allowable elevation difference	H1	When outdoor unit is installed higher than indoor unit	≤ 50
	H2	When outdoor unit is installed lower than indoor unit	≤ 40
Allowable length of joint piping	L3	T-joint piping (field-supply); Max. piping length between the first T-joint and solidly welded-shut end point	≤ 2

L = Length, H = Height

Piping Size

Main Piping Size (LA)

	12.1 kW	14.0 kW	15.5 kW
Gas tubing mm (inches)	$\phi 15.88$ ($\phi 5/8$)		
Flare connection			
Liquid tubing mm (inches)	$\phi 9.52$ ($\phi 3/8$)		
Flare connection			

Note :The refrigerant piping should be used with R410A refrigerant.

Main Piping Size After Distribution (LB, LC...)

Total capacity after distribution	Below kW	7.1 (2.5HP)	—
	Over kW	—	7.1 (2.5HP)
Piping size	Gas piping	(mm)	$\phi 12.7$
		(inches)	$\phi 1/2$
	Liquid piping	(mm)	$\phi 9.52$
		(inches)	$\phi 3/8$

Note: In case the total capacity of indoor units connected after distribution exceeds the capacity of the outdoor unit, select the main piping size for the capacity of the outdoor unit.

Indoor Unit Piping Connection ($\phi 1, \phi 2 \dots \phi n-1$)

Indoor unite type	22	28	36	45	56	60	71/73	90	106	140	160
Gas piping mm (inches)	$\phi 12.7$ ($\phi 1/2$)					$\phi 15.88$ ($\phi 5/8$)					
Liquid piping mm (inches)	$\phi 6.35$ ($\phi 1/4$)					$\phi 9.52$ ($\phi 3/8$)					

System Limitations

Outdoor units	12.1 kW	14.0 kW	15.5 kW
Number of max. connectable indoor units	7	8	9
Max. allowable indoor/outdoor capacity ratio	50 - 130%		

kW = kilowatts

2-WAY Mini-FSV LE1 Series


Distribution Joint Kits

CZ-P160BK2


Use: For indoor unit (Capacity after distribution joint is 22.4 kW or less.)*

* In case the total capacity of indoor units connected after distribution exceeds the total capacity of the outdoor units, select the distribution piping size for the total capacity of the outdoor units.

GAS PIPING

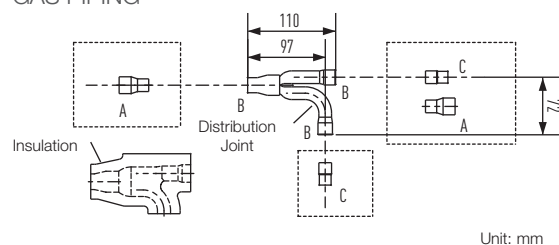

LIQUID PIPING

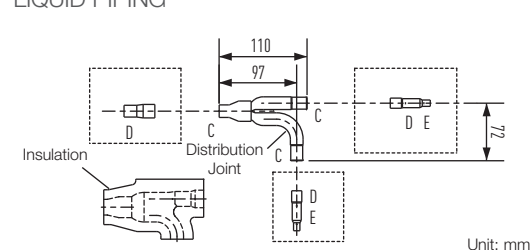


Size of connection point on each part (Shown are inside diameters of tubing)						
Size		Part A	Part B	Part C	Part D	Part E
Dimension	(mm)	Ø19.05	Ø15.88	Ø12.70	Ø9.52	Ø6.35
	(inches)	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

CZ-P680BK2


Use: For indoor unit (Capacity after distribution joint is greater than 22.4 kW and no more than 68.0 kW.)*

* In case the total capacity of indoor units connected after distribution exceeds the total capacity of the outdoor units, select the distribuion piping size for the total capacity of the outdoor units.

GAS PIPING

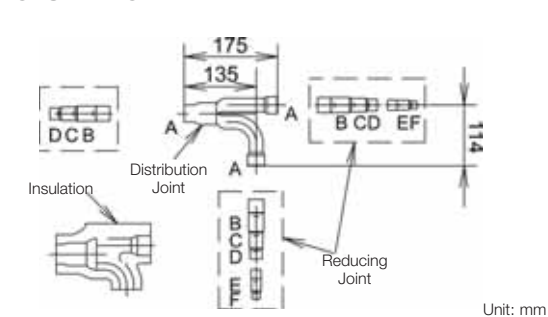


LIQUID PIPING

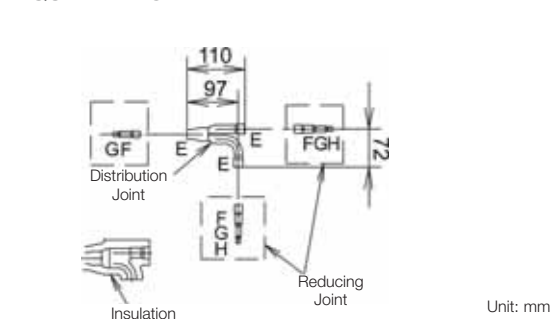

Size of connection point on each part (Shown are inside diameters of piping)									
Size		Part A	Part B	Part C	Part D	Part E	Part F	Part G	Part H
Dimension	(mm)	Ø28.58	Ø25.4	Ø22.22	Ø19.05	Ø15.88	Ø12.7	Ø9.52	Ø6.35
	(inches)	Ø1-1/8	Ø1	Ø7/8	Ø3/4	Ø5/8	Ø1/2	Ø3/8	Ø1/4

Piping design

Select the installation location so that the length and size of refrigerant piping are within the allowable range shown in the figure below.

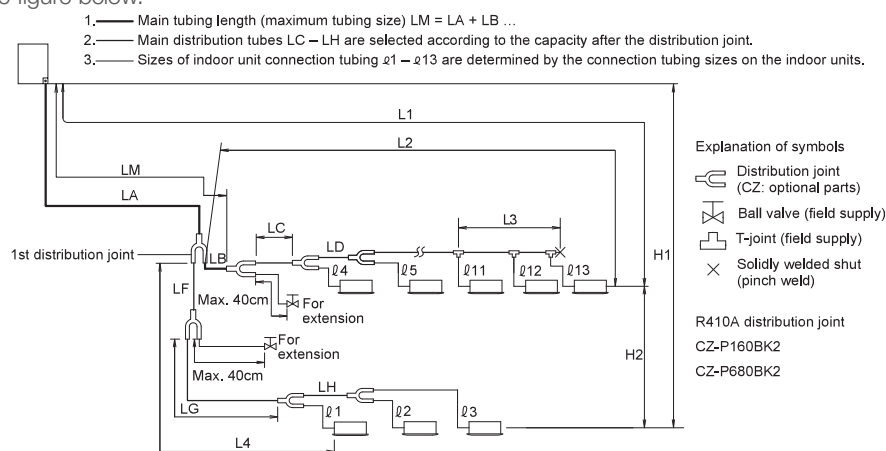

Ranges that Apply to Refrigerant Piping Lengths and to Differences in Installation Heights

Items	Mark	Contents	Length (m)
Allowable piping length	L1	Max. piping length	Actual length ≤ 150 Equivalent length ≤ 175
	$\Delta L (L2 - L4)$	Difference between max. length and min. length from the 1st distribution joint	≤ 50
	LM	Max. length of main piping (at maximum size) *Even after 1st distribution joint, LM is allowed if at maximum piping length.	—
	$\phi 1, \phi 2 - \phi 13$	Max. length of each distribution pipe	≤ 50
	$L1 + \phi 1 + \phi 2 - \phi 12 + LF + LG + LH$	Total max. piping length including length of each distribution pipe (only liquid piping)	≤ 300
Allowable elevation difference	H1	When outdoor unit is installed higher than indoor unit	≤ 50
		When outdoor unit is installed lower than indoor unit	≤ 40
	H2	Max. difference between indoor units	≤ 15
Allowable length of joint piping	L3	T-joint piping (field-supply); Max. piping length between the first T-joint and solidly welded-shut end point	≤ 2

L = Length, H = Height

Piping Size

Main Piping Size (LA)

	22.4 kW	28.0 kW
Outdoor unit horsepower	8 HP	10 HP
Gas piping mm (inches)	$\phi 19.05 (\phi 3/4)$	$\phi 22.22 (\phi 7/8)$
	Flare connection	Brazing connection
Liquid piping mm (inches)	$\phi 9.52 (\phi 3/8)$	
	Flare connection	

Note :If future extension is planned, select the piping diameter based on the total horsepower after extension. The refrigerant piping should be used with R410A refrigerant.

Main Piping Size After Distribution (LB, LC...)

Total capacity after distribution	Below kW		7.1 (2.5HP)	16.0 (6 HP)	22.5 (8.1 HP)	—
	Over kW		—	7.1 (2.5 HP)	16.0 (6 HP)	22.5 (8.1 HP)
Piping size	Gas tubing	(mm)	ø12.7	ø15.88	ø19.05	ø22.22
		(inches)	ø1/2	ø5/8	ø3/4	ø7/8
	Liquid tubing	(mm)	ø9.52	ø9.52	ø9.52	ø9.52
		(inches)	ø3/8	ø3/8	ø3/8	ø3/8

kW = kilowatts

Note :In case the total capacity of connected indoor units exceeds the total capacity of the outdoor units, select the main piping size for the total capacity of the outdoor units.

Indoor Unit Piping Connection ($\phi 1, \phi 2 \dots \phi n-1$)

Indoor unit type	22	28	36	45	56	60	71/73	90	106	140	160	180	224	280
Gas tubing mm (inches)	$\phi 12.7 (\phi 1/2)$					$\phi 15.88 (\phi 5/8)$						$\phi 19.05 (\phi 3/4)$	$\phi 22.22 (\phi 7/8)$	
Liquid tubing mm (inches)	$\phi 6.35 (\phi 1/4)$					$\phi 9.52 (\phi 3/8)$								

System Limitations

Outdoor units	22.4 kW (8 HP)	28.0 kW (10 HP)
Number of max. connectable indoor units	13	13
Max. allowable indoor/outdoor capacity ratio	50 - 130%	

24-hour nanoe™ X Air Purification*

While the general filters in air purifiers are effective against airborne bacteria and viruses, nanoe™ X also works to inhibit longer-living, adhered bacteria and viruses. As well as this, the Panasonic Comfort Cloud and WLAN smart adaptor (CZ-CAPWFC2) gives you access to your air conditioner anywhere, anytime, so you can turn nanoe™ X on even while you're out and enjoy 24-hour quality air.



*Unit must be constantly turned on and operating in the air purification mode - nanoe™ X.
** <https://www.businessinsider.com/coronavirus-lifespan-on-surfaces-graphic-2020-3>

24-hour nanoe™ X air Purification, anywhere, anytime

**24-hour
nanoe™ X
Purification**

Actively purifies your air and inhibits pollutants all day long

+

Comfort Cloud App

Get 24 hr Quality Air for you and your loved ones by turning nanoe™ X on using Panasonic Comfort Cloud even when you're out. nanoe™ X functions in both cooling and heating modes and is maintenance-free, helping you keep your costs down with cleaner air.

- nanoe™ X functions in cooling as well as fan mode after business hours.
- Cleans indoor air even when the space is not in use.
- No need to consume excessive electricity to clean the air.



Business Hours

• Simulated image

nanoe ON, Cooling ON (Cooling Mode)

+

After Business Hours

• Simulated image

nanoe ON, Cooling OFF (Fan Mode)

Only at 15W*/Hour
Low energy consumption with fan mode 15W* per hour for a single unit.

nanoe™ X cleans indoor air while maintaining a comfortable temperature when people are present.


After business hours, nanoe™ X keeps cleaning indoor air in fan mode.

*In case of using 2.2 kW~7.3 kW 4 way cassette models with fan tap L, flap position 5, standard panel. Energy consumption may vary depending on models.



nanoe™ X device evolution

- Evolved Discharge System → Dramatically Increased Release of Hydroxyl Radicals
- Higher Concentration of nanoe™ X in the Space → Faster nanoe™ X Effects

	nanoe™	nanoe™ X Generator Mark 1	nanoe™ X Generator Mark 2	nanoe™ X Generator Mark 3
Hydroxyl radicals				
	0.48 Trillion* hydroxyl radicals/sec	4.8 Trillion* hydroxyl radicals/sec	9.6 Trillion* hydroxyl radicals/sec	48 Trillion* hydroxyl radicals/sec
Device status				
		Electrostatic atomisation Multi-leader discharge		Electrostatic atomisation Circular discharge

* Measured using the ESR method (amount of hydroxyl radicals immediately after release from the generator). (Source: Panasonic internal research)

Differences in discharge systems




Changed from 4-point discharge to circular discharge



nanoe™ X technology inhibits novel coronavirus

Our nanoe™ X technology has shown to suppress the activity of viurses & bacteria. Enjoy cheaner and quality air at home. Stay safer indoors with nanoe™ X.

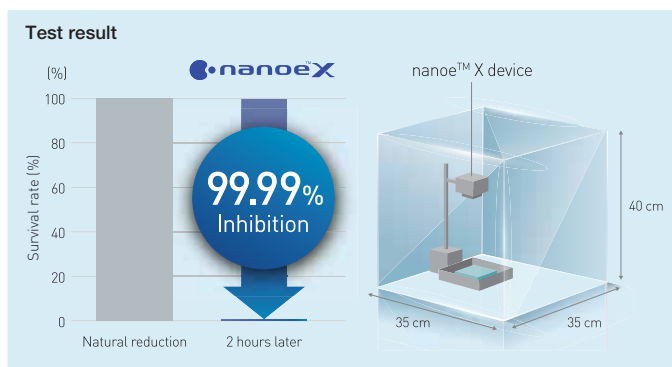


Overview

The objective of this test was to determine if nanoe™ X inhibit the activity of the SARS-CoV-2 virus. Gauze saturated with SARS-CoV-2 virus solution was exposed to a generator of nanoe™ X from a distance of 15 cm in a 45-liter box for 2 hours. Over 99.99%* of the activity of the SARS-CoV-2 virus was inhibited.

Device type: 10 x nanoe™ X (Mark 1)
Subject: Novel coronavirus (SARS-CoV-2)
Test Institute: TEXCELL (France) Test duration: 2 hours


How nanoe™ X inhibits viruses

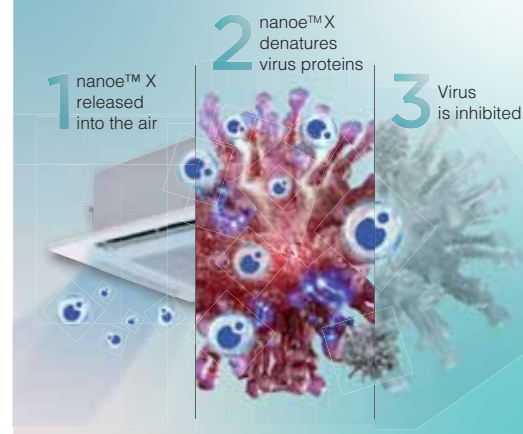

Notes: 1) The virus infectious titer was measured and used to calculate the inhibition rate. 2) This verification was designed to generate basic research data on the effects of nanoe™ X on the novel coronavirus in laboratory conditions. It was not designed to evaluate product performance.

nanoe™ X Mark 3 achieves virus inhibition in a larger space in a shorter time

Mark 3 (100 x) Device: 4-Way Cassette Large-Space Test for Adherent Virus (Bacteriophage)
In a large space of 139 m³ (56 m², approx. 34 tatami mats, ceiling height 2.48 m), a 98.81% inhibition rate was achieved in 4 hours.

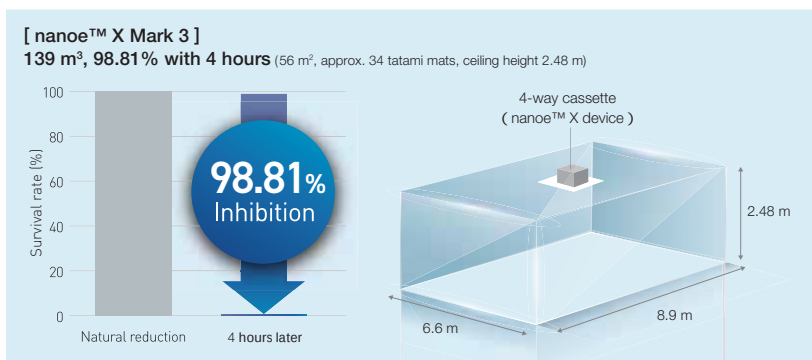

Please refer to the nanoe™ X website for the Mark 3 information.

Device type: nanoe™ X Generator Mark 3
Subject: Adhesive virus (coliphage)
Indoor unit: 4-way cassette
Test Institute: SGS Inc
Test duration: 4 hours
Report No.: SHES210901902584

Indoor Units

Wide choice of models depending on the indoor requirements

Simplified Wired Remote Controller



CZ-RTC6W
CZ-RTC6WBLW2



CZ-RTC6

Simple and Sophisticated Design In-and-Out

User friendly interface with stylish design measuring just 86 x 86 mm, this is an extremely compact remote controller which looks great in any room.



High-spec Wired Remote Controller



CZ-RTC5B

Large 3.5" full-dot LCD with white LED backlight

Characters and icons are clearly displayed for improved visibility. The display is also large enough to provide a wide range of information for easy confirmation of operation conditions.



Stylish, easy-to-use touch key design

The elegant, flat design features large touch keys in a simple layout enabling easy, intuitive operation.




Key Indoor Units Equipped DC motors



All Ducted Series / F3, M2, Z1, E2, E1, type

Discharge air temperature control

Smart sensors control discharge air temperature for precise room temperature control. Possible to reduce cold drafts during heating operation.

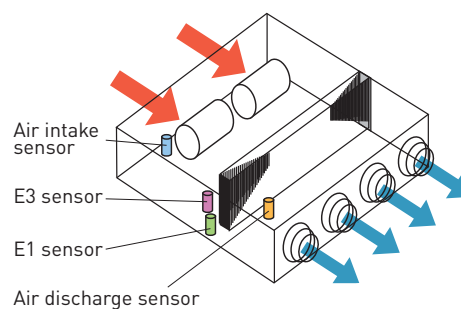

Wall Mounted / K3 (22~45), K3 (56~106) type



Compact design with flat surface enables seamless match with any type of room interior

Noise reducing external valve kit

To reduce noise level of expansion valve.
(Optional accessory)



CZ-P73SVK3 (for 22 - 73 type)

CZ-P106SVK3 (for 106 type)

*Please prepare field-supply reducer (Liquid Ø9.52 to Ø6.35) for 73 type indoor unit.

Remote Temperature Sensor





















CZ-CSRC3

- This is a remote sensor which can be used with indoor units. Use it to detect the room temperature when no remote controller sensor or body sensor is used (connection to a system without a remote controller is possible).
- For joint use with a remote control switch, use the remote control switch as main remote controller.

FSV Indoor Units Range

Wide choice of models depending on the indoor requirements

Class	22	28	36	45	56	60	73	90
Capacity	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating
kW	2.2/2.5	2.8/3.2	3.6/4.2	4.5/5.0	5.6/6.3	6.0/7.1	7.3/8.0	9.0/10.0
BTU/h	7,500/8,500	9,600/11,000	12,300/14,300	15,400/17,100	19,100/21,500	20,500/24,200	24,900/27,300	30,700/34,100
Type								
nanoeX Generator Mark3 F3 type ECONAVI Mid Static Adaptive Ducted	 S-22MF3E5AN	 S-28MF3E5AN	 S-36MF3E5AN	 S-45MF3E5AN	 S-56MF3E5AN	 S-60MF3E5AN	 S-73MF3E5AN	 S-90MF3E5AN
F2 type ECONAVI Mid Static Ducted	 S-22MF2E5A	 S-28MF2E5A	 S-36MF2E5A	 S-45MF2E5A	 S-56MF2E5A	 S-60MF2E5A	 S-73MF2E5A	 S-90MF2E5A
nanoeX Generator Mark3 M2 type ECONAVI Slim Low Static Ducted	NEW  S-22MM2EA	NEW  S-28MM2EA	NEW  S-36MM2EA	NEW  S-45MM2EA	NEW  S-56MM2EA			
Z1 type ECONAVI Slim Low Static Ducted Twenty Series	 S-22MZ1H4A	 S-28MZ1H4A	 S-36MZ1H4A	 S-45MZ1H4A	 S-56MZ1H4A	 S-60MZ1H4A	 S-73MZ1H4A	
E2 type High Static Ducted / Energy Saving High-Fresh Air Ducted								
E1 type High Static Ducted							 S-73ME1E5	
nanoeX Generator Mark3 K3 type ECONAVI Wall Mounted	NEW  S-22MK3E	NEW  S-28MK3E	NEW  S-36MK3E	NEW  S-45MK3E	NEW  S-56MK3E		NEW  S-73MK3E	
K2 type ECONAVI Wall Mounted	 S-22MK2E5A	 S-28MK2E5A	 S-36MK2E5A	 S-45MK2E5A	 S-56MK2E5A		 S-73MK2E5A	
nanoeX Generator Mark3 U2 type ECONAVI ** 4-Way Cassette Panel No. CZ-KPU3H / CZ-KPU3A	 S-22MU2E5BN	 S-28MU2E5BN	 S-36MU2E5BN	 S-45MU2E5BN	 S-56MU2E5BN	 S-60MU2E5BN	 S-73MU2E5BN	 S-90MU2E5BN
nanoeX Generator Mark3 Y3 type ECONAVI 4-Way Mini Cassette Panel No. CZ-KPY4	NEW  S-22MY3EB	NEW  S-28MY3EB	NEW  S-36MY3EB	NEW  S-45MY3EB	NEW  S-56MY3EB			
L1 type 2-Way Cassette Panel No. CZ-02KPL2 Panel No. CZ-03KPL2 (Only for S-73ML1E5)	 S-22ML1E5	 S-28ML1E5	 S-36ML1E5	 S-45ML1E5	 S-56ML1E5		 S-73ML1E5	
D1 type 1-Way Cassette Panel No. CZ-KPD2		 S-28MD1E5	 S-36MD1E5	 S-45MD1E5	 S-56MD1E5		 S-73MD1E5	
T2 type ECONAVI Ceiling			 S-36MT2E5A	 S-45MT2E5A	 S-56MT2E5A		 S-73MT2E5A	
nanoeX Generator Mark1 G1 type Floor Console	 S-22MG1E5N	 S-28MG1E5N	 S-36MG1E5N	 S-45MG1E5N	 S-56MG1E5N			
P1 type Floor Standing	 S-22MP1E5	 S-28MP1E5	 S-36MP1E5	 S-45MP1E5	 S-56MP1E5		 S-71MP1E5	
R1 type Concealed Floor Standing	 S-22MR1E5	 S-28MR1E5	 S-36MR1E5	 S-45MR1E5	 S-56MR1E5		 S-71MR1E5	

* High fresh air system is not allowed for 18 kW model. ** Only for CZ-KPU3A



Self-diagnosing function



Automatic fan operation



Dry mode



Intelligent auto flap control



Automatic restart function for power failure



Air swing



Built-in drain pump



DC motor

106	112	140	160	180	224	280	Wireless remote control		
Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Type with built-in sensor	Type with separately installed sensor	Functions
10.6/11.4 36,200/38,900	11.2/12.5 38,200/42,700	14.0/16.0 47,800/54,600	16.0/18.0 54,600/61,400	18.0/20.0 61,400/68,200	22.4/25.0 76,400/85,300	28.0/31.5 95,500/107,500			
	S-112MF3E5AN	S-140MF3E5AN	S-160MF3E5AN					●	
S-106MF2E5A		S-140MF2E5A	S-160MF2E5A					●	
								●	
								●	
				S-180ME2E5 *	S-224ME2E5	S-280ME2E5		●	
S-106ME1E5		S-140ME1E5			S-224ME1E5	S-280ME1E5		●	
S-106MK3E							●		
S-106MK2E5A							●		
	S-112MU2E5BN	S-140MU2E5BN	S-160MU2E5BN					●	
								●	
								●	
								●	
S-106MT2E5A		S-140MT2E5A						●	
								●	
								●	
								●	

F3 TYPE Mid Static Adaptive Ducted



Control all aspects of your environment with exceptional performance and quiet operation. Vertical installation flexibility offers the perfect solution when ceiling heights are restricted.



S-22MF3E5AN / S-28MF3E5AN / S-36MF3E5AN
S-45MF3E5AN / S-56MF3E5AN



S-60MF3E5AN / S-73MF3E5AN
S-90MF3E5AN

Technical focus

- 4 installation possibilities with horizontal and vertical mounting and selectable rear or bottom air inlet
- Space saving 250mm height
- DC fan motor for variable external static pressure control
- Industry-leading horizontal/vertical design
- Powerful 150Pa static pressure in a compact unit.
- Leading-class low sound levels from 20 dB(A)
- Improved drain pan suitable for both horizontal / vertical installation
- nanoe™ X : 100x for CAC (100 times more nanoe™ particle for wide commercial space)
- Accurate temperature control to reduce cold drafts during operation

Variable external static pressure control

Optimal airflow set-up is possible depending on ducting design and conditions.

For short ducting such as hotels

10Pa

Optimal Control by DC Motor


150Pa

For long ducting or for usage with high efficiency filter

* Please refer to technical databook for detail.


Powerful 150Pa external static pressure in an industry-leading horizontal/vertical installation design

Delivering static pressure up to 150Pa external static pressure, the industry-leading horizontal/vertical design offers the power you need in a compact form factor.

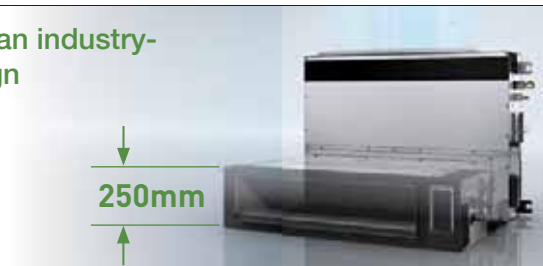

Improved drain pan design

Drain pan is shared in both cases horizontal and vertical installation. No need to alternate anymore.

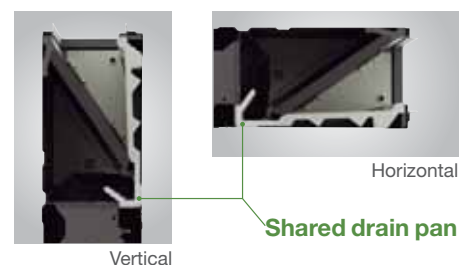

Superior Air Quality

Combined with the strong static pressure this model ensures pristine nanoe™ X air travels unaffected even through multiple duct shapes at lengths of 10m, as well as making them ideal for use in larger spaces.



Bend once

Bend twice

Bend three times

As the experiments demonstrate; even with a total ductwork length of up to 10m, effectiveness of nanoe™ X is maintained.

nanoe[™]X Generator Mark3



Please refer to the nanoe[™] X website for the Mark 3 information.



S-112MF3E5AN / S-140MF3E5AN / S-160MF3E5AN



Self-diagnosing Function



Automatic Fan Operation



Dry mode



Automatic Restart Function



Built-in Drain Pump

Optional accessory

ECONAVI ECONAVI ready



CZ-RTC6W
CZ-RTC6WBLW2



CZ-RTC6



CZ-CENSC1



CZ-RTC5B



CZ-RWS3
Remote controller




CZ-RWRC3
Receiver

Built-in Drain pump
(DC motor pump)

Space saving height of
250mm for all models

250mm standardised height provides easy and uniform installation for models with different capacities, especially when ceiling heights are restricted.

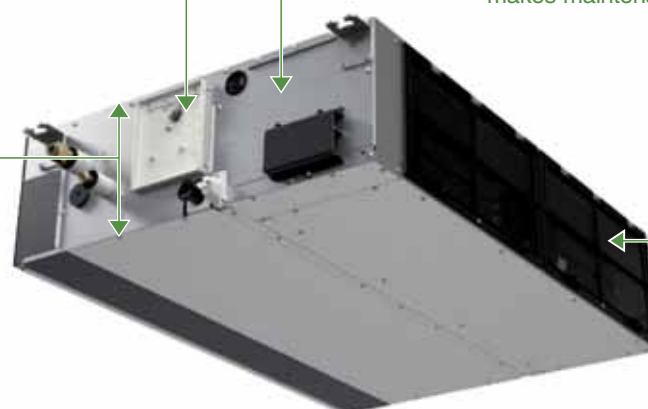


External electrical equipment box
makes maintenance easy

Built-in filter

Discharge air temperature control


- Possible to control discharge air temperature for accurate room temperature control.
- Possible to reduce cold drafts during heating operation.

Note: Before spec-in, please consult with an authorised Panasonic dealer.

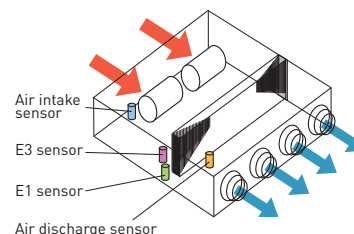


Selectable air inlet position

A removable panel allows air inlet position to be adjusted to enable rear or bottom entry, depending on ductwork installation.

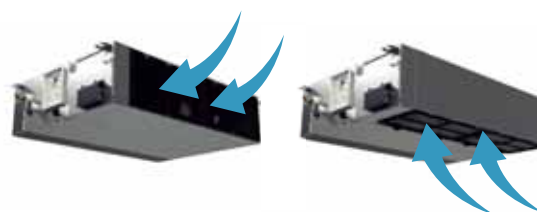


System example

An inspection port (450 mm x 450 mm or larger) is required at the lower side of the indoor unit body.

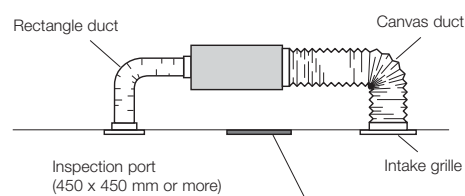

More powerful drain pump

Using a high-lift built-in drain pump, drain piping can be elevated up to 690 mm from the base of the unit.

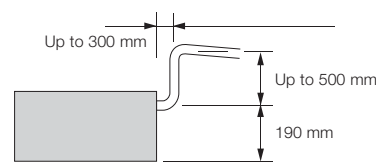


F3_{TYPE} Mid Static Adaptive Ducted

Model Name			S-22MF3E5AN	S-28MF3E5AN	S-36MF3E5AN	S-45MF3E5AN	S-56MF3E5AN
Power source			220/230/240 V, 1 phase - 50/60 Hz				
Cooling capacity	kW		2.2	2.8	3.6	4.5	5.6
	BTU/h		7,500	9,600	12,300	15,400	19,100
Heating capacity	kW		2.5	3.2	4.2	5.0	6.3
	BTU/h		8,500	10,900	14,300	17,100	21,500
Power input	Cooling	kW	0.06/0.06/0.06	0.06/0.06/0.06	0.06/0.06/0.06	0.06/0.06/0.06	0.089/0.089/0.089
	Heating	kW	0.06/0.06/0.06	0.06/0.06/0.06	0.06/0.06/0.06	0.06/0.06/0.06	0.089/0.089/0.089
Running amperes	Cooling	A	0.46/0.45/0.44	0.46/0.45/0.44	0.46/0.45/0.44	0.46/0.45/0.44	0.65/0.63/0.61
	Heating	A	0.46/0.45/0.44	0.46/0.45/0.44	0.46/0.45/0.44	0.46/0.45/0.44	0.65/0.63/0.61
Fan motor	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Cooling	m³/h	768/660/480	768/660/480	840/720/480	840/720/480	960/840/600
	Air flow rate (H/M/L)	L/s	213/183/133	213/183/133	233/200/133	233/200/133	267/233/167
	Heating	m³/h	840/720/480	840/720/480	840/720/480	840/720/480	960/840/600
	Air flow rate (H/M/L)	L/s	233/200/133	233/200/133	233/200/133	233/200/133	267/233/167
	Output	kW	0.107	0.107	0.107	0.107	0.107
	External static pressure	Pa	30 (10-150)	30 (10-150)	30 (10-150)	30 (10-150)	30 (10-150)
Sound power level (H/M/L)		dB	54/51/43	54/51/43	54/51/43	54/51/43	58/55/47
Sound pressure sound (H/M/L)		dB(A)	31/28/20	31/28/20	31/28/20	31/28/20	35/32/24
Dimensions		H x W x D	mm	250 x 800 x 730	250 x 800 x 730	250 x 800 x 730	250 x 800 x 730
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20
Net weight		kg	26	26	26	26	26

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

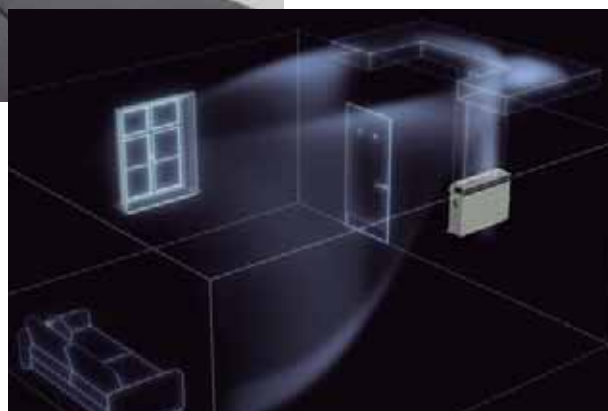


S-60MF3E5AN	S-73MF3E5AN	S-90MF3E5AN	S-112MF3E5AN	S-140MF3E5AN	S-160MF3E5AN
220/230/240 V, 1 phase - 50/60 Hz					
6.0	7.3	9.0	11.2	14.0	16.0
20,500	24,900	30,700	38,200	47,800	54,600
7.1	8.0	10.0	12.5	16.0	18.0
24,200	27,300	34,100	42,700	54,600	61,400
0.079/0.079/0.079	0.079/0.079/0.079	0.136/0.136/0.136	0.265/0.265/0.265	0.265/0.265/0.265	0.330/0.330/0.330
0.079/0.079/0.079	0.079/0.079/0.079	0.136/0.136/0.136	0.265/0.265/0.265	0.265/0.265/0.265	0.330/0.330/0.330
0.53/0.52/0.51	0.53/0.52/0.51	0.92/0.90/0.88	1.80/1.76/1.72	1.80/1.76/1.72	2.22/2.14/2.09
0.53/0.52/0.51	0.53/0.52/0.51	0.92/0.90/0.88	1.80/1.76/1.72	1.80/1.76/1.72	2.22/2.14/2.09
Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
1,260/1,080/900	1,260/1,080/900	1,500/1,380/960	2,220/1,920/1,560	2,220/1,920/1,560	2,400/2,040/1,680
350/300/250	350/300/250	417/383/267	617/533/433	617/533/433	667/567/467
1,260/1,080/900	1,260/1,080/900	1,500/1,380/960	2,220/1,920/1,560	2,220/1,920/1,560	2,400/2,040/1,680
350/300/250	350/300/250	417/383/267	617/533/433	617/533/433	667/567/467
0.165	0.165	0.165	0.259	0.259	0.259
30 (10-150)	30 (10-150)	40 (10-150)	50 (10-150)	50 (10-150)	50 (10-150)
54/51/46	54/51/46	58/56/48	64/59/55	64/59/55	66/60/56
31/28/23	31/28/23	35/33/25	41/36/32	41/36/32	43/37/33
250 x 1,000 x 730	250 x 1,000 x 730	250 x 1,000 x 730	250 x 1,400 x 730	250 x 1,400 x 730	250 x 1,400 x 730
Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
31	31	31	40	40	40

F3 TYPE MID STATIC DUCTED Dimensions

Type	A	B	C	D	E	F	Air intake port size
	mm	mm	mm	mm	mm	Q'ty	mm
22/28/36/45/56	867	800	450 (Pitch 150 × 3)	71	592	12	204 × 683
60/73/90	1,067	1,000	750 (Pitch 150 × 5)	21	792	16	204 × 883
112/140/160	1,467	1,400	1,050 (Pitch 150 × 7)	71	1,192	20	204 × 1,283

①	Refrigerant tubing joint (liquid tube) S-22/28/36/45/56MF3E5AN : Φ6.35 (flared) S-60/73/90/112/140/160MF3E5AN : Φ9.52 (flared)
②	Refrigerant tubing joint (gas tube) S-22/28/36/45/56MF3E5AN : Φ12.7 (flared) S-60/73/90/112/140/160MF3E5AN : Φ15.88 (flared)
③	Upper drain port VP20 (ø26 mm) 200 mm flexible hose supplied
④	Bottom drain port VP20 (ø26 mm)
⑤	Suspension lug (4 – 12 × 30 mm)
⑥	Power supply outlet
⑦	Fresh air intake port (ø100 mm) ^{*1}
⑧	Flange for flexible air outlet duct
⑨	Electrical component box

^{*1} Necessary to attach duct connecting flange (field supply).

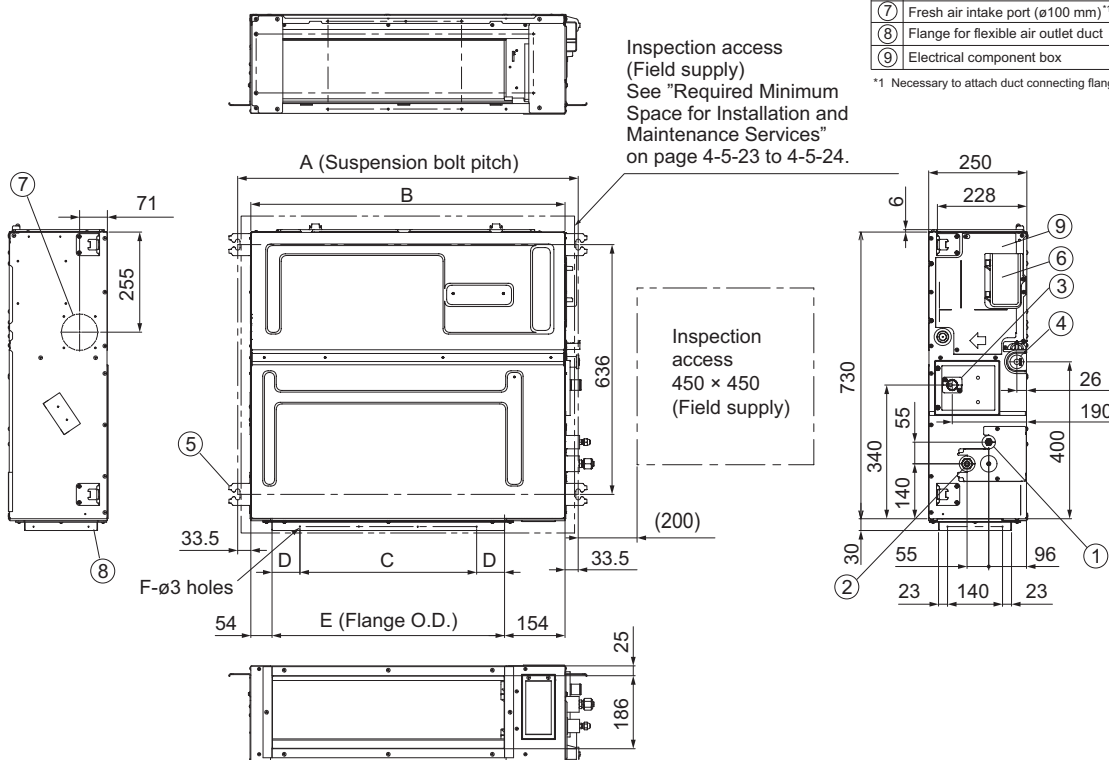

F2_{TYPE} Mid Static Ducted



F2 type is designed specifically for applications requiring fixed square ducting.



S-22MF2E5A / S-28MF2E5A / S-36MF2E5A
S-45MF2E5A / S-56MF2E5A



S-60MF2E5A / S-73MF2E5A / S-90MF2E5A



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode



Automatic
Restart
Function




Built-in Drain
Pump

Technical focus

- Variable external static pressure control
- Industry-leading low sound levels from 25 dB(A)
- Built-in drain pump provides 702 mm lift
- Easy to install and maintain
- Air off sensor avoids cold air drafts during heating operation
- Configurable air temperature control

Variable external static pressure control


Optimal airflow set-up is possible depending on ducting design and conditions.

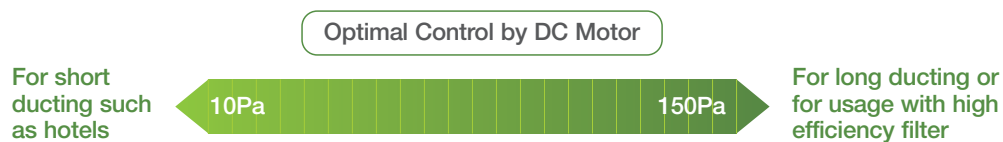

* Please refer to technical databook for detail.


System example

An inspection port (450 mm x 450 mm or larger) is required at the lower side of the indoor unit body.

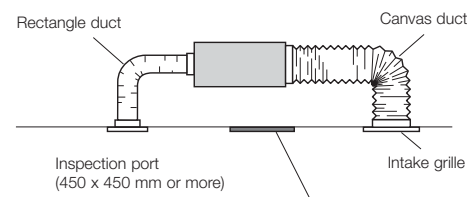

More powerful drain pump

Using a high-lift drain pump, drain piping can be elevated up to 701 mm from the base of the unit.

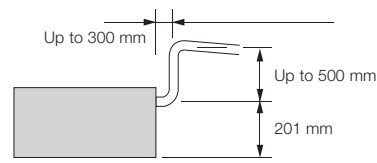

Optional accessory



S-106MF2E5A / S-140MF2E5A / S-160MF2E5A



CZ-RTC6W



CZ-RTC6



CZ-CENSC1



CZ-RTC5B



CZ-RWS3
Remote controller




CZ-RWRC3
Receiver

Built-in Drain pump (DC motor pump)

Standardised height of 290 mm for all models

Height standardisation enables easy and uniform installation for models with different capacities.

External electrical equipment box makes maintenance easy

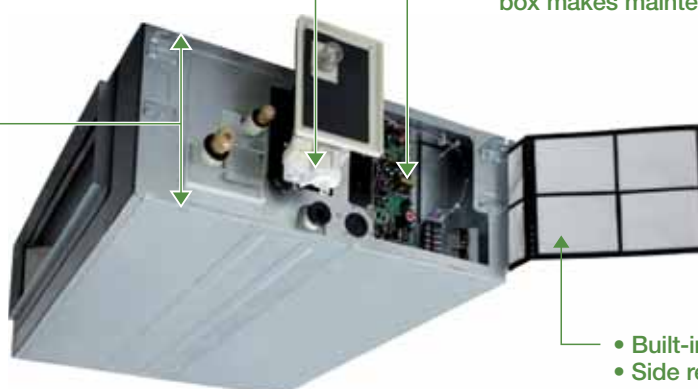


- Built-in filter
- Side removable filter

Discharge air temperature control


- Possible to control discharge air temperature for accurate room temperature control.
- Possible to reduce cold drafts during heating operation.

Note: Before spec-in, please consult with an authorised Panasonic dealer.

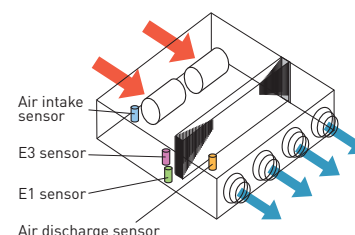

V-shaped heat exchanger

To improve heat exchange efficiency, an original V-shaped heat exchanger was developed incorporating a conventional high-efficiency slit fan and high-efficiency grooved heat transfer tubes. This increases the heat exchange surface area by about 80%.



Increases surface area by about 30 to 80%



F2_{TYPE} Mid Static Ducted

Model Name			S-22MF2E5A	S-28MF2E5A	S-36MF2E5A	S-45MF2E5A	S-56MF2E5A
Power source			220/230/240 V, 1 phase - 50/60 Hz				
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6
		BTU/h	7,500	9,600	12,300	15,400	19,100
Heating capacity		kW	2.5	3.2	4.2	5.0	6.3
		BTU/h	8,500	10,900	14,300	17,100	21,500
Power input	Cooling	kW	0.070/0.070/0.070	0.070/0.070/0.070	0.070/0.070/0.070	0.070/0.070/0.070	0.100/0.100/0.100
	Heating	kW	0.070/0.070/0.070	0.070/0.070/0.070	0.070/0.070/0.070	0.070/0.070/0.070	0.100/0.100/0.100
Running amperes	Cooling	A	0.60/0.57/0.56	0.60/0.57/0.56	0.60/0.57/0.56	0.60/0.57/0.56	0.77/0.74/0.71
	Heating	A	0.60/0.57/0.56	0.60/0.57/0.56	0.60/0.57/0.56	0.60/0.57/0.56	0.77/0.74/0.71
Fan motor	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m ³ /h	840/780/540	840/780/540	840/780/540	840/780/600	960/900/720
		L/s	233/217/150	233/217/150	233/217/150	233/217/167	267/250/200
	Output	kW	0.119	0.119	0.119	0.119	0.119
	External static pressure	Pa	70(10-150)	70(10-150)	70(10-150)	70(10-150)	70(10-150)
Sound power level (H/M/L)		dB	55/51/44	55/51/44	55/51/44	56/54/47	56/54/47
Sound pressure sound (H/M/L)		dB(A)	33/29/22	33/29/22	33/29/22	34/32/25	34/32/25
Dimensions	H x W x D	mm	290x800x700	290x800x700	290x800x700	290x800x700	290x800x700
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping		VP-25	VP-25	VP-25	VP-25	VP-25
Net weight	kg		29	29	29	29	29


GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

F2 TYPE MID STATIC DUCTED Dimensions

SIZE 22-56

- 1 Refrigerant piping joint (liquid tube) Ø6.35 Flare
- 2 Refrigerant piping joint (gas tube) Ø12.7 Flare
- 3 Upper drain port VP25 (O.D. Ø32 mm)
- 4 Bottom drain port VP25 (O.D. Ø32 mm)
- 5 Suspension lug (4-12 x 30 mm)
- 6 Power supply outlet
- 7 Fresh air intake port (Ø150 mm)
- 8 Flange for flexible air outlet duct
- 9 Electrical component box

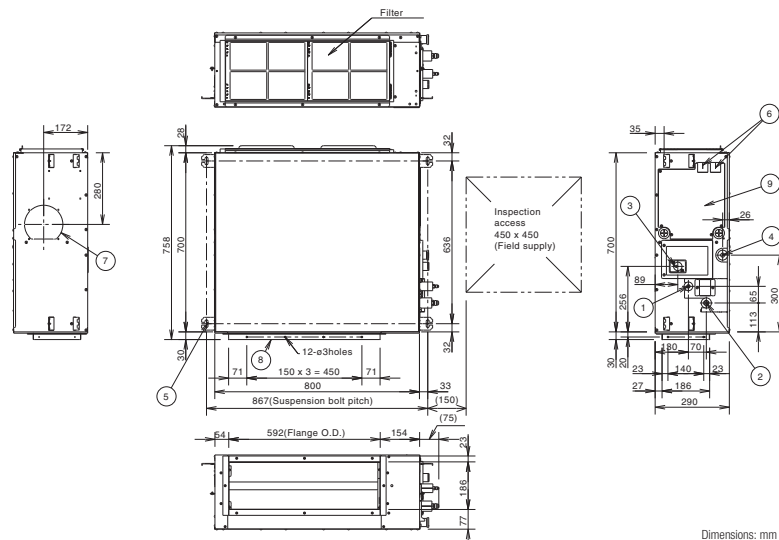


Dimensions: mm

S-60MF2E5A	S-73MF2E5A	S-90MF2E5A	S-106MF2E5A	S-140MF2E5A	S-160MF2E5A
220/230/240V, 1 phase - 50/60 Hz					
6.0	7.3	9.0	10.6	14.0	16.0
20,500	24,900	30,700	36,200	47,800	54,600
7.1	8.0	10.0	11.4	16.0	18.0
24,200	27,300	34,100	38,900	54,600	61,400
0.120/0.120/0.120	0.120/0.120/0.120	0.135/0.135/0.135	0.195/0.195/0.195	0.215/0.215/0.215	0.225/0.225/0.225
0.120/0.120/0.120	0.120/0.120/0.120	0.135/0.135/0.135	0.200/0.200/0.200	0.210/0.210/0.210	0.225/0.225/0.225
0.91/0.89/0.87	0.91/0.89/0.87	0.99/0.97/0.95	1.35/1.30/1.27	1.48/1.44/1.39	1.55/1.50/1.47
0.91/0.89/0.87	0.91/0.89/0.87	0.99/0.97/0.95	1.37/1.34/1.29	1.46/1.42/1.38	1.55/1.50/1.46
Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
1,260/1,140/900	1,260/1,140/900	1,500/1,380/1,140	1,920/1,560/1,260	2,040/1,740/1,380	2,160/1,860/1,500
350/317/250	350/317/250	417/383/317	533/433/350	567/483/383	600/533/417
0.124	0.124	0.124	0.235	0.235	0.235
70(10-150)	70(10-150)	70(10-150)	100(10-150)	100(10-150)	100(10-150)
57/54/48	57/54/48	59/56/50	60/56/53	61/57/54	62/58/55
35/32/26	35/32/26	37/34/28	38/34/31	39/35/32	40/36/33
290x1,000x700	290x1,000x700	290x1,000x700	290x1,400x700	290x1,400x700	290x1,400x700
Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
34	34	34	46	46	46


SIZE 60-90

- 1 Refrigerant piping joint (liquid tube) Ø9.52 Flare
- 2 Refrigerant piping joint (gas tube) Ø15.88 Flare
- 3 Upper drain port VP25 (O.D. Ø32 mm)
- 4 Bottom drain port VP25 (O.D. Ø32 mm)
- 5 Suspension lug (4-12 × 30 mm)
- 6 Power supply outlet
- 7 Fresh air intake port (Ø150 mm)
- 8 Flange for flexible air outlet duct
- 9 Electrical component box

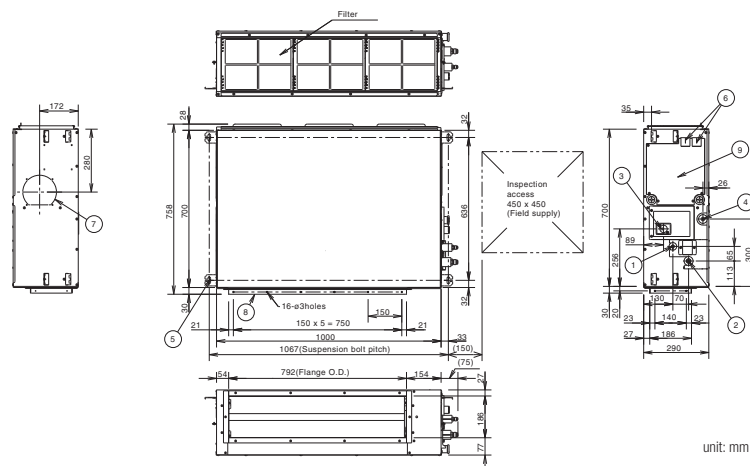

SIZE 106-160

- 1 Refrigerant piping joint (liquid tube) Ø9.52 Flare
- 2 Refrigerant piping joint (gas tube) Ø15.88 Flare
- 3 Upper drain port VP25 (O.D. Ø32 mm)
- 4 Bottom drain port VP25 (O.D. Ø32 mm)
- 5 Suspension lug (4-12 × 30 mm)
- 6 Power supply outlet
- 7 Fresh air intake port (Ø150 mm)
- 8 Flange for flexible air outlet duct
- 9 Electrical component box

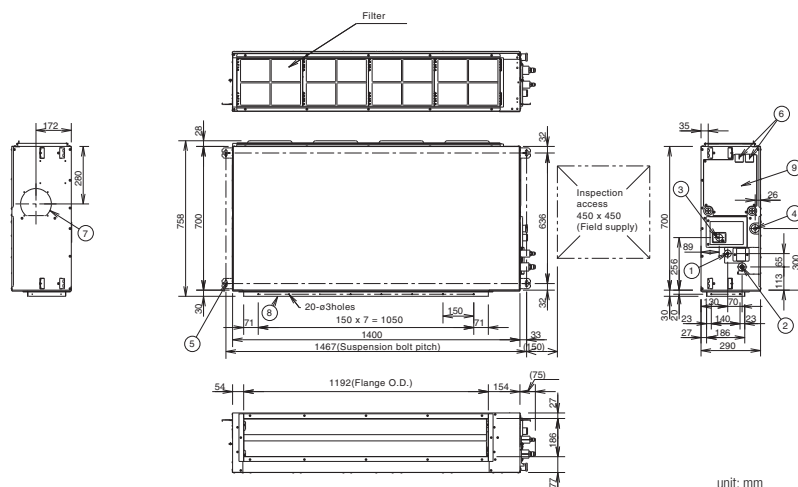

NEW

M2^{TYPE} Slim Low Static Ducted Concealed duct



The ultra slim M2 type is one of the leading products of its type in the industry.

With a depth and height of only 450 mm and 200 mm, it provides greater flexibility and adaptability for various applications.

In addition, high efficiency and extreme low noise level make it highly suitable for hotels and small offices.

nanoe™ X
Generator Mark3



Please refer to the nanoe™ X website for the Mark3 information.



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode



Automatic
Restart
Function





Built-in Drain
Pump

Technical focus

- Ultra-slim profile: depth 450 mm and height 200 mm for all models
- DC fan motor greatly reduces power consumption
- Ideal for hotel application with very narrow false ceilings
- Easy maintenance and service by external electrical box
- 40 Pa static pressure enables ductwork to be fitted.
- Includes drain pump
- Includes built in filter.
- nanoe™ X : 100x for CAC (100 times more nanoe™ particle for wide commercial space)

More flexible Installation

The depth is 190mm less than the current model, making it possible to install it in a narrower ceiling space.

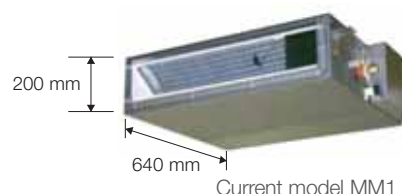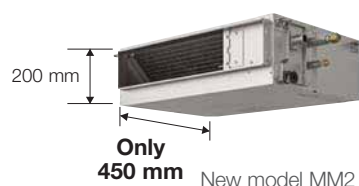


Low noise design for a more comfortable space

Improved fan and fan casing design reduces noise levels by 2 -5 dB(A) compared to current models, providing a more comfortable space.



Drain pump with increased power!

Using the built-in high-lift drain pump, the drain piping rise height can be increased to 634 mm from the lower surface of the body.

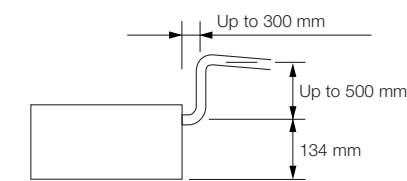

nanoe™ X Generator Mark3

nanoe™ X contains plenty of OH radicals that have outstanding effects on various air pollutants, including bacteria and viruses, mould, allergens, pollen, hazardous substances, as well as deodorise odours. It also keeps moisture in your skin and hair.

nanoe™ X
Generator Mark3



Invisible Air Contaminants are Suppressed



S-22MM2EA
S-28MM2EA
S-36MM2EA



S-45MM2EA/S-56MM2EA

Optional accessory



CZ-RTC6W
CZ-RTC6WBLW2



CZ-RTC6



CZ-CENSC1



CZ-RTC5B



CZ-RWS3
Remote controller



CZ-RWRC3
Receiver

Model Name			S-22MM2EA	S-28MM2EA	S-36MM2EA	S-45MM2EA	S-56MM2EA
Power source			220/230/240 V, 1 phase - 50/60 Hz				
Cooling capacity	kW		2.2	2.8	3.6	4.5	5.6
	BTU/h		7,500	9,600	12,300	15,400	19,100
Heating capacity	kW		2.5	3.2	4.2	5.0	6.3
	BTU/h		8,500	10,900	14,300	17,100	21,500
Power input	Cooling	kW	0.025/0.025/0.025	0.029/0.029/0.029	0.032/0.032/0.032	0.039/0.039/0.039	0.054/0.054/0.054
	Heating	kW	0.025/0.025/0.025	0.029/0.029/0.029	0.032/0.032/0.032	0.039/0.039/0.039	0.054/0.054/0.054
Running current	Cooling	A	0.33/0.33/0.33	0.35/0.35/0.35	0.36/0.36/0.36	0.44/0.44/0.44	0.51/0.51/0.51
	Heating	A	0.33/0.33/0.33	0.35/0.35/0.35	0.36/0.36/0.36	0.44/0.44/0.44	0.51/0.51/0.51
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	480/420/300	510/450/390	540/480/420	780/660/630	900/780/660
		L/s	133/117/83	142/125/108	150/133/117	217/183/175	250/217/183
	Motor output	kW	0.04	0.04	0.04	0.04	0.04
	External static pressure	Pa	10 (30)	15 (30)	15 (40)	15 (40)	15 (40)
Sound power level (H/M/L)		dB	41/40/35	42/41/38	43/41/38	45/42/41	47/44/42
Sound pressure level (H/M/L)		dB(A)	26/25/20	27/26/23	28/26/23	30/27/26	32/29/27
Dimensions	H x W x D	mm	200x700x450	200x700x450	200x700x450	200x900x450	200x900x450
	Liquid	mm (inches)	Ø6.35(1/4)	Ø6.35(1/4)	Ø6.35(1/4)	Ø6.35(1/4)	Ø6.35(1/4)
	Gas	mm (inches)	Ø12.7(1/2)	Ø12.7(1/2)	Ø12.7(1/2)	Ø12.7(1/2)	Ø12.7(1/2)
Pipe connections	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20
Net weight		kg	17	17	17	19	19



GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

M2 TYPE SLIM LOW STATIC DUCTED Dimensions

Detailed dimensions of indoor unit

Type	A	B	C	D
mm	mm	mm	mm	mm
22, 28, 36	740	700	662	615
45, 56	940	900	862	815

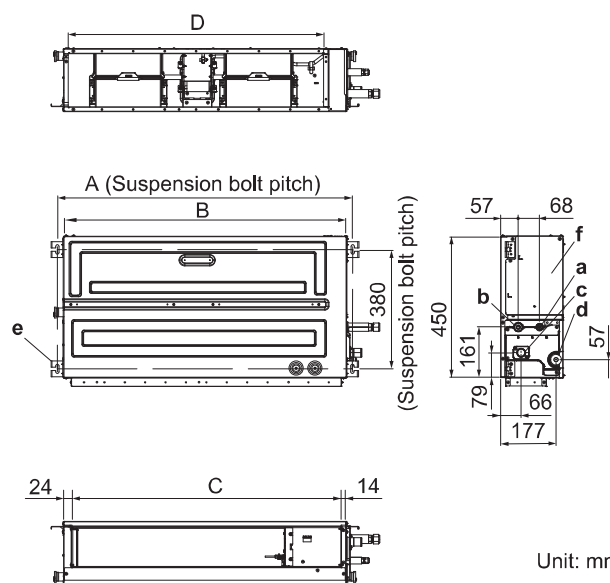

- a) Refrigerant piping joint (liquid tube)
- b) Refrigerant tubing joint (gas tube)
- c) Upper drain port
- d) Bottom drain port
- e) Suspension lug
- f) Electrical component box
- g) Fresh air intake port
- h) Flange for flexible air outlet duct

Unit: mm

Z1 TYPE Slim Low Static Ducted Twenty Series

Concealed duct

The ultra slim Z1 type is one of the leading products of its type in the industry. With a height of only 200 mm, it provides greater flexibility and adaptability for various applications. In addition, high efficiency and extreme low noise level make it highly suitable for hotels and small offices.



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode



Automatic
Restart
Function

Technical focus

- Ultra-slim profile: 200 mm for all models
- DC fan motor greatly reduces power consumption
- Ideal for hotel application with very narrow false ceilings
- Easy maintenance and service by external electrical box
- 29 Pa static pressure enables ductwork to be fitted.
- Drain pump (optional)

Ultra-slim profile for all models

200mm height for all models allows installation in very narrow ceilings.



Drain pump with increased power! (optional)

Using the optional high-lift drain pump, the drain piping rise height can be increased to 700 mm from the drain pipe port.



CZ-73DMZ1



S-73MZ1H4A

S-22MZ1H4A/ S-28MZ1H4A/ S-36MZ1H4A
S-45MZ1H4A/ S-56MZ1H4A/ S-60MZ1H4A

Optional accessory

ECONAVI
ECONAVI ready



CZ-RTC6W



CZ-RTC6



CZ-CENSC1



CZ-RTC5B

CZ-RWS3
Remote controllerCZ-RWRC3
Receiver

Model Name		S-22MZ1H4A	S-28MZ1H4A	S-36MZ1H4A	S-45MZ1H4A	S-56MZ1H4A	S-60MZ1H4A	S-73MZ1H4A
Power source		220/230/240 V, 1 phase - 50/60 Hz						
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	6.0	7.3
	BTU/h	7,500	9,500	12,200	15,300	19,100	20,500	24,900
Heating capacity	kW	2.5	3.2	4.2	5.1	6.4	7.1	8.0
	BTU/h	8,500	10,900	14,300	17,400	21,800	24,200	27,300
Power input	Cooling kW	0.075/0.075/0.075	0.080/0.080/0.080	0.085/0.085/0.085	0.095/0.095/0.095	0.100/0.100/0.100	0.100/0.100/0.100	0.125/0.125/0.125
	Heating kW	0.075/0.075/0.075	0.080/0.080/0.080	0.085/0.085/0.085	0.095/0.095/0.095	0.100/0.100/0.100	0.100/0.100/0.100	0.125/0.125/0.125
Running current	Cooling A	0.50/0.47/0.45	0.55/0.52/0.50	0.60/0.57/0.55	0.70/0.68/0.65	0.75/0.72/0.70	0.75/0.72/0.70	0.80/0.78/0.75
	Heating A	0.50/0.47/0.45	0.55/0.52/0.50	0.60/0.57/0.55	0.70/0.68/0.65	0.75/0.72/0.70	0.75/0.72/0.70	0.80/0.78/0.75
Fan	Type	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	480/420/360	600/540/420	690/630/510	720/660/540	870/750/630	1,080/840/660
		L/s	133/117/100	167/150/117	192/175/142	200/183/150	242/208/175	300/233/183
	Motor output	W	60	60	60	60	60	60
	External static pressure	Pa	10-30	10-30	10-30	10-30	10-30	10-30
Sound power level (H/M/L)	dB	50/49/47	52/51/49	54/52/50	56/54/52	57/55/53	60/57/55	62/60/58
Sound pressure level (H/M/L)	dB(A)	28/27/25	30/29/27	32/30/28	34/32/30	35/33/31	38/35/33	40/38/36
Dimensions	H x W x D	mm	200x830x500	200x830x500	200x830x500	200x830x500	200x830x500	200x1,050x550
	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
	Drain piping		O.D. Ø20.5 mm / I.D. Ø15.5mm	O.D. Ø20.5 mm / I.D. Ø15.5mm	O.D. Ø20.5 mm / I.D. Ø15.5mm	O.D. Ø20.5 mm / I.D. Ø15.5mm	O.D. Ø20.5 mm / I.D. Ø15.5mm	O.D. Ø20.5 mm / I.D. Ø15.5mm
Net weight	kg	17	17	18	18	18	18	24


GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

Z1 TYPE SLIM LOW STATIC DUCTED TWENTY SERIES Dimensions

SIZE 22-60

SIZE 73

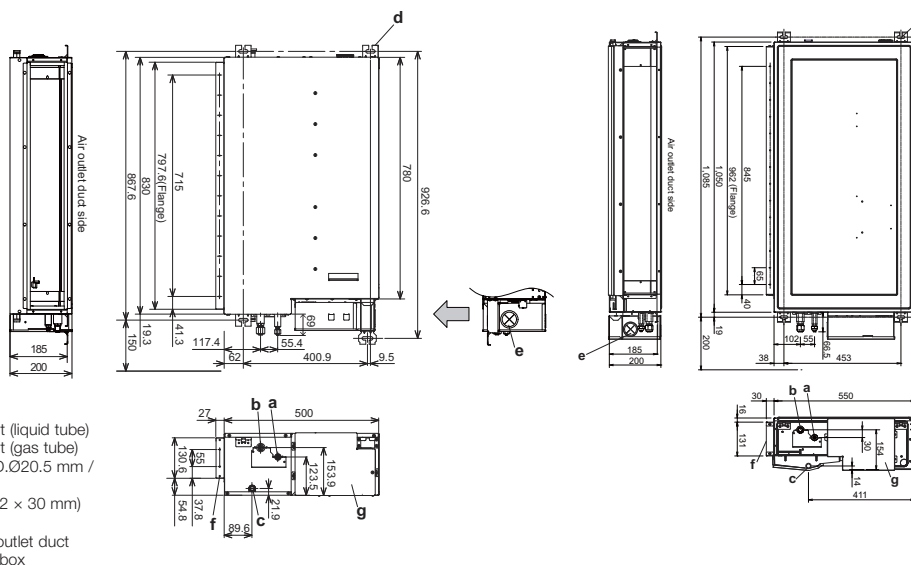

unit: mm

E2_{TYPE} High Static Ducted



Concealed duct / Air conditioning mode

High static and large airflow ducted for exceptional installation flexibility.



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode



Automatic
Restart
Function

Technical focus

- Design flexibility thanks to high static pressure and large air volume
- DC motor equipped
- Power input 45% less (compared to E1 type)
- Discharge air temperature control to reduce cold drafts during heating operation
- Configurable air temperature control
- Available Fresh Air Intake mode (See page 80-81)

3-step static pressure set up

You can select between the three Static Pressure modes of 270 Pa/140 Pa/60(72*) Pa for extra installation flexibility.



* 28 kW model

Max. 270 Pa static pressure setting

A maximum static pressure setting of a high 270 Pa enables the use of long ducts for installation in a wide range of spaces. Ideal for large-scale offices, restaurants and other facilities.

Sensible cooling 5-10% improved

New heat exchanger with ϕ 7mm pipe that increases the heat transfer surface to improve sensible cooling (5-10% improvement)


No Rap Valve Kit required

Thanks to improved performance, a Rap Valve Kit (CZ-P160RVK2) is no longer required.



Discharge air temperature control

- Equipped with 4 sensors (Intake/ Discharge)
- Able to control discharge air temperature for accurate room temperature control.
- Possible to reduce cold drafts during heating operation.

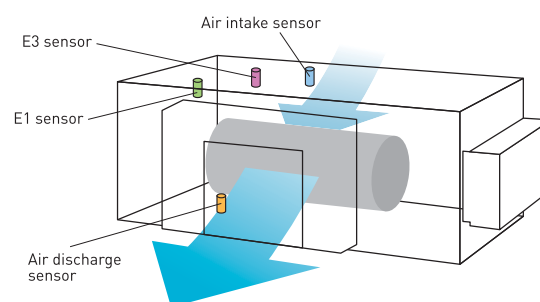



S-180ME2E5 / S-224ME2E5 / S-280ME2E5

Optional accessory




Model Name			S-180ME2E5	S-224ME2E5	S-280ME2E5
Power source			220/230/240 V, 1 phase - 50 Hz, 220/230 V, 1 phase - 60 Hz		
Cooling capacity	kW		18.0	22.4	28.0
	BTU/h		61,400	76,400	95,500
Heating capacity	kW		20.0	25.0	31.5
	BTU/h		68,200	85,300	107,500
Power input	Cooling	kW	0.400	0.440	0.715
	Heating	kW	0.400	0.440	0.715
Running current	Cooling	A	2.40/2.30/2.20	2.55/2.45/2.35	3.95/3.85/3.70
	Heating	A	2.40/2.30/2.20	2.55/2.45/2.35	3.95/3.85/3.70
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	2,940/2,640/2,340	3,360/3,060/2,640	4,320/3,780/3,180
		L/s	817/733/650	933/850/733	1,200/1,050/883
	Motor output	kW	0.560 x 2	0.560 x 2	0.750 x 2
	External static pressure	Pa	140 (60/270)	140 (60/270)	140 (72/270)
Sound power level (H/M/L)		dB	76/74/72	77/75/73	81/79/75
Sound pressure level (H/M/L)		dB(A)	44/42/40	45/43/41	49/47/43
Dimensions	H x W x D	mm	479 x 1,453 x 1,205	479 x 1,453 x 1,205	479 x 1,453 x 1,205
	Pipe connections	Liquid	inches (mm)	Ø9.52 (3/8)	Ø9.52 (3/8)
		Gas	inches (mm)	Ø19.05 (3/4)	Ø22.22 (7/8)
	Drain piping		VP-25	VP-25	VP-25
Net weight		kg	102	102	106

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

E2 TYPE HIGH STATIC DUCTED Dimensions

- 1 Refrigerant piping (liquid pipes) Ø9.52
- 2 Refrigerant piping (gas pipes)
180 & 224 type: Ø19.05, 280 type: Ø22.22
- 3 Power supply outlet (Ø25 grommet, rubber)
- 4 Power supply outlet (spare) (Ø30 knock-out)
- 5 Optional outlet for piping
- 6 Drain port 25 A, male thread
- 7 Duct connection for suction
- 8 Duct connection for discharge

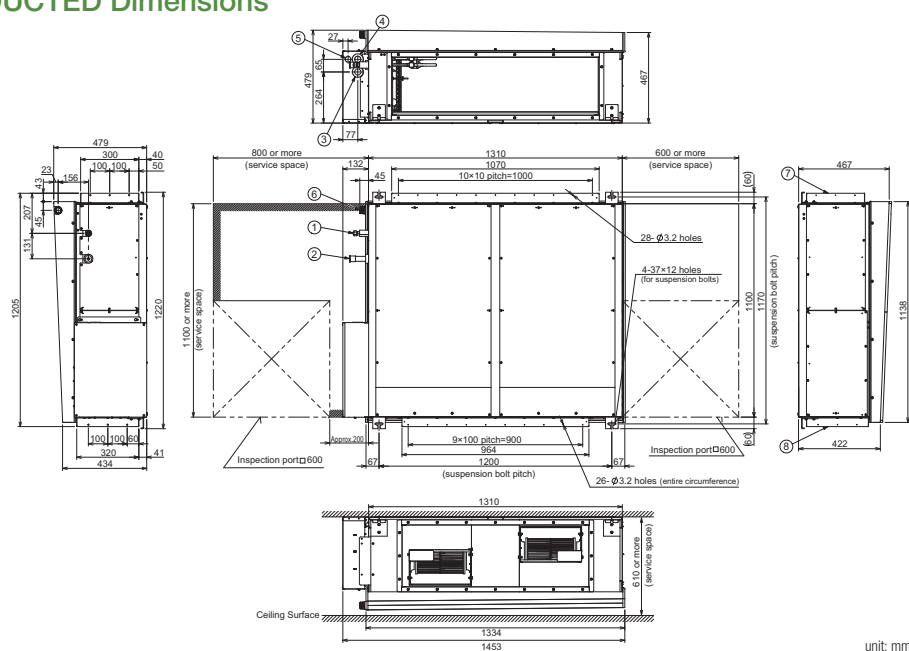

unit: mm

E2_{TYPE} Energy Saving High Fresh Air Ducted

Concealed duct high-static pressure



High static and large airflow ducted for exceptional installation flexibility.



Self-diagnosing Function



Automatic Fan Operation



Automatic Restart Function


Technical focus

- 100% fresh air intake for ventilation purpose
- Design flexibility with high static pressure and large air volume
- DC motor equipped
- Power input 45% less (compared to H1 type)
- Discharge air temperature control to reduce cold drafts during heating operation
- Configurable air temperature control

High Fresh System

High Fresh System enables delivery of fresh outside air at almost the same temperature and humidity as indoor air without putting a burden on air conditioning.

* Capable of treating outdoor air only. Indoor air conditioner units are required to adjust indoor air temperature.

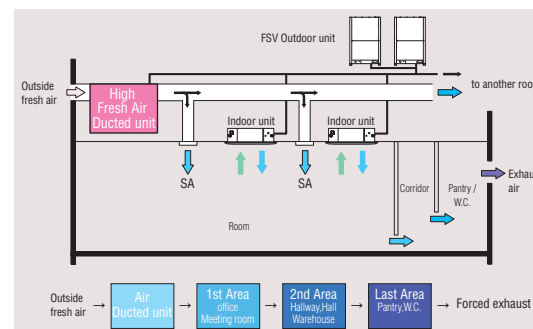

Mix operation unit with standard indoor units


Possible to combine High Fresh Air ducted indoor unit and standard air ducted indoor units.

When other indoor units are connected in same circuit, keep following capacity ratio.

E2 type/Outdoor unit < 30%, and Total of indoors(incl. E2)/outdoor < 100%

Discharge air temperature control

- Equipped with 4 sensors (Intake/ Discharge)
- Able to control discharge air temperature for accurate room temperature control.
- Possible to reduce cold drafts during heating operation.

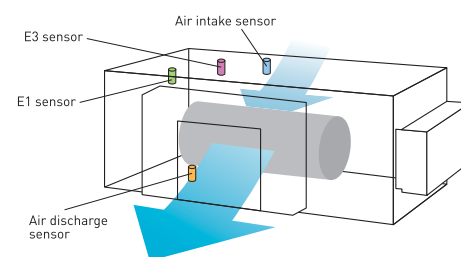



Optional accessory




Model Name			S-224ME2E5	S-280ME2E5
Power source			220/230/240 V, 1 phase - 50 Hz, 220/230 V, 1 phase - 60 Hz	
Cooling capacity		kW	22.4	28.0
		BTU/h	76,400	95,500
Heating capacity		kW	21.2	26.5
		BTU/h	72,300	90,400
Power input	Cooling	kW	0.290	0.350
	Heating	kW	0.290	0.350
Running current	Cooling	A	1.90/1.85/1.80	2.30/2.20/2.10
	Heating	A	1.90/1.85/1.80	2.30/2.20/2.10
Fan	Type		Sirocco fan	Sirocco fan
	Air flow rate	m³/h	1,700	2,100
		L/s	472	583
	Motor output	kW	0.560 x 2	0.750 x 2
	External static pressure	Pa	200	200
Sound power level		dB	75	76
Sound pressure level		dB(A)	43	44
Dimensions	H x W x D	mm	479 x 1,453 x 1,205	479 x 1,453 x 1,205
Pipe connections	Liquid	inches (mm)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
	Gas	inches (mm)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)
	Drain piping		VP-25	VP-25
Net weight		kg	102	106

GLOBAL REMARKS	Rated conditions:	Cooling	Heating	Specifications are subject to change without notice.
	Indoor air temperature	27°C DB / 19°C WB	20°C DB	
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB	

E2 TYPE HIGH STATIC DUCTED Dimensions

- 1 Refrigerant piping (liquid pipes) Ø9.52
- 2 Refrigerant piping (gas pipes)
224 type: Ø19.05, 280 type: Ø22.22
- 3 Power supply outlet (Ø25 grommet, rubber)
- 4 Power supply outlet (spare) (Ø30 knock-out)
- 5 Optional outlet for piping
- 6 Drain port 25 A, male thread
- 7 Duct connection for suction
- 8 Duct connection for discharge

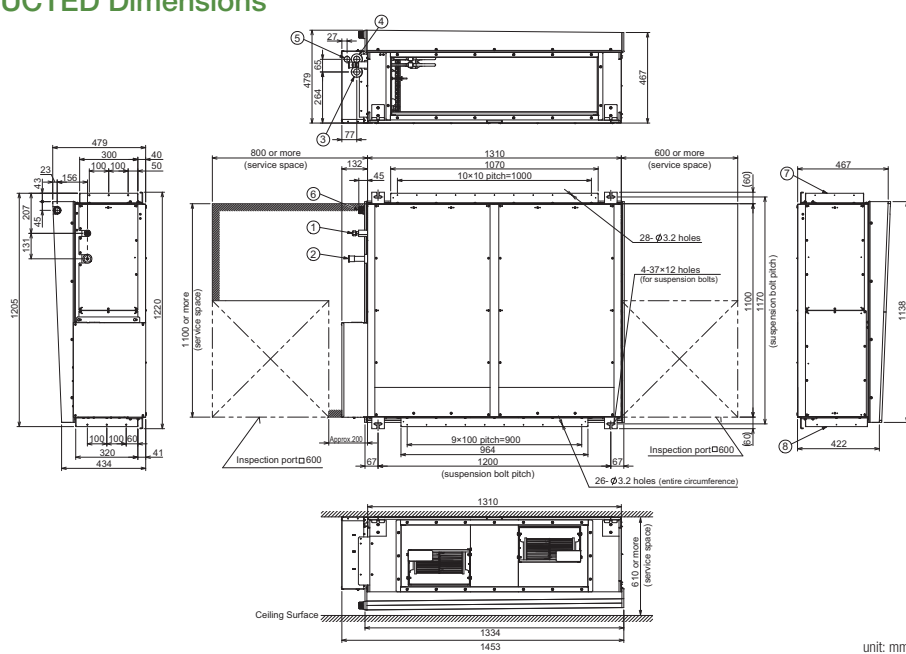

E1 TYPE High Static Ducted

Concealed duct high-static pressure

The E1 range of ducted units offers improved design flexibility for extended duct layouts as a result of their increased external static pressures.



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode




Automatic
Restart
Function

Technical focus

- Complete flexibility for ductwork design
- Can be located into a weatherproof housing for external installation
- Discharge air temperature control to reduce cold drafts during heating operation
- Configurable air temperature control


System example

An inspection port (600 x 600 mm or more) is required at the lower side of the indoor unit body (field supply).

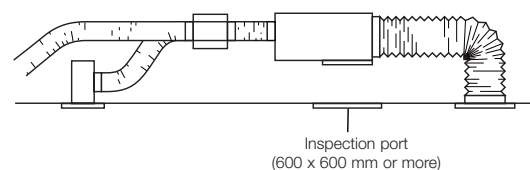

Discharge air temperature control

- Equipped with 4 sensors (Intake/ Discharge)
- Able to control discharge air temperature for accurate room temperature control.
- Possible to reduce cold drafts during heating operation.

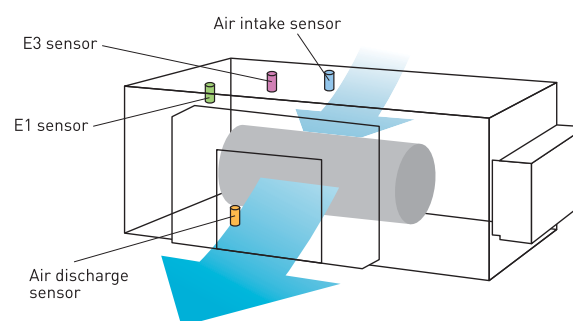



S-73ME1E5 / S-106ME1E5 / S-140ME1E5

S-224ME1E5 / S-280ME1E5

Optional accessory



CZ-RTC6W



CZ-RTC6



CZ-RTC5B

CZ-RWS3
Remote controllerCZ-RWRC3
Receiver

Model Name			S-73ME1E5	S-106ME1E5	S-140ME1E5	S-224ME1E5	S-280ME1E5
Power source			220/230/240 V, 1 phase - 50/60 Hz				220/230/240 V, 1 phase - 50 Hz
Cooling capacity	kW		7.3	10.6	14.0	22.4	28.0
	BTU/h		25,000	36,000	47,800	76,400	95,500
Heating capacity	kW		8.0	11.4	16.0	25.0	31.5
	BTU/h		27,000	39,000	54,600	85,300	107,500
Power input	Cooling	kW	0.480/0.505/0.530	0.520/0.545/0.570	0.600/0.660/0.710	0.870/0.900/0.930	1.270/1.330/1.390
	Heating	kW	0.480/0.505/0.530	0.520/0.545/0.570	0.600/0.660/0.710	0.870/0.900/0.930	1.270/1.330/1.390
Running current	Cooling	A	2.29/2.30/2.31	2.46/2.46/2.47	2.80/2.90/3.00	4.05/4.06/4.07	6.04/6.06/6.07
	Heating	A	2.29/2.30/2.31	2.46/2.46/2.47	2.80/2.90/3.00	4.05/4.06/4.07	6.04/6.06/6.07
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	1,380/1,320/1,260	1,800/1,680/1,500	2,160/2,100/1,980	3,360/3,190/2,980	4,320/4,200/3,960
		L/s	383/367/350	500/467/417	600/583/550	933/886/828	1,200/1,167/1,100
	Motor output	kW	0.2	0.2	0.35	0.2	0.4
	External static pressure	Pa	186	176	167	176	216 (235)*
Sound power level (H/M/L)			55/54/53	56/55/53	58/57/55	59/58/57	62/61/60
Sound pressure level (H/M/L)			44/43/42	45/44/42	47/46/44	48/47/46	51/50/49 (52/51/50)*
Dimensions	H x W x D	mm	420 x 1,065 x 620	420 x 1,065 x 620	450 x 1,065 x 620	479 x 1,428 x 1,230	479 x 1,428 x 1,230
	Liquid	mm (inches)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)
	Drain piping		VP-25	VP-25	VP-25	VP-25	VP-25
Net weight			47	50	54	110	120


GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to be changed without notice.


* With booster cable.

E1 TYPE HIGH STATIC DUCTED Dimensions

- 1 Refrigerant liquid line (ø9.52)
- 2 Refrigerant gas line (ø15.88)
- 3 Power supply entry
- 4 Drain connection (20A / VP25)
- 5 Duct connection for suction
- 6 Duct connection for discharge

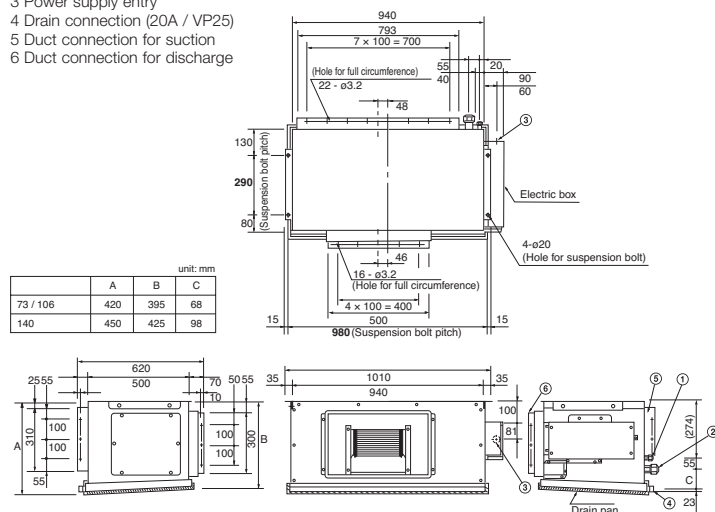

- 1 Refrigerant piping (liquid pipes) Ø9.52
- 2 Refrigerant piping (gas pipes) 224 type: Ø19.05, 280 type: Ø22.22
- 3 Power supply outlet (Ø25 grommet, rubber)
- 4 Power supply outlet (spare) (Ø30 knock-out)
- 5 Drain port 25 A, male thread
- 6 Duct connection for suction
- 7 Duct connection for discharge

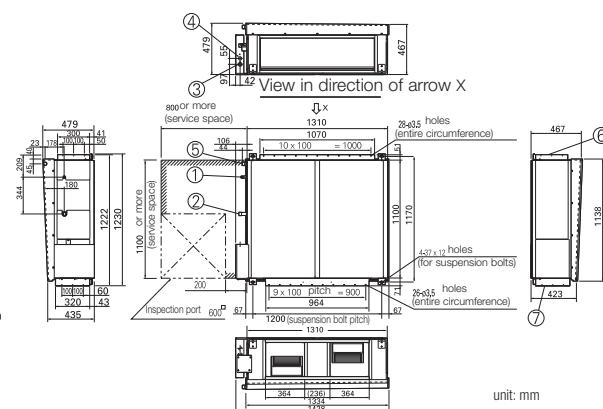

NEW

K3_{TYPE}

Wall Mounted



The K3 type wall mounted unit has a stylish smooth design with a washable front panel.

Small, lightweight and low noise level makes it ideal for small offices and other commercial applications.

nanoe™ X
Generator Mark3



Please refer to the nanoe™ X website for the Mark3 information.



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode



Intelligent Auto
Swing



Automatic
Restart
Function



Auto Swing
(Auto Flap Control)

Technical focus

- Closed discharge port when not in use
- Lighter and smaller units make installation easy
- Quiet operation
- Smooth and durable design
- Piping outlet in six directions
- Washable front panel
- Air distribution is automatically altered depending on the operational mode of the unit
- nanoe™ X : 100x for CAC (100 times more nanoe™ particle for wide commercial space)

Noise reducing external valve kit

To reduce noise level of expansion valve.
(Optional accessory)

CZ-P73SVK3 (for 22 - 73 type)
CZ-P106SVK3 (for 106 type)

*Please prepare field-supply reducer (Liquid Ø9.52 to Ø6.35) for 73 type indoor unit.



Easy installation and servicing

Installation and service, such as removing the crossflow fan and fixing the drain hose, has been made easier and simpler.

Front grille



Remove front grille with just two screws and slider lock

Built-in support holders for drain hose and piping



Providing easy access to set up drain hose and piping

Cross flow fan



Removal of cross flow fan without lifting the evaporator

Drain hose



Smooth and secure connection of drain hose with lock

Compact and uniform design

The width of 45MK3 is 230mm less than the current 45MK2 model, making it possible to install it in a narrower space.

The two types of exteriors with a unified design make it easy to match with any interior.



New model MK3
22 - 45 type



Current model MK2
22 - 36 type



New model MK3
56 - 10.6 type



Current model MK2
45 - 10.6 type





* Receiver is included in the wall mounted indoor unit.

Closed discharge port

When the unit is turned off, the flap closes completely to prevent entry of dust into the unit and to keep the equipment clean.

Quiet operation

Low operating noise level makes these units ideal for hotels and hospital applications.

Smooth and durable design

The smooth cover means these units match most modern interiors. Their compact size enables them to blend in, even in small spaces.

Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear, left bottom, making installation easier.


Washable front panel

The indoor unit's front panel can be easily removed and washed for trouble-free maintenance.



Air distribution is automatically adjusted depending on the operational mode of the unit

Air outlet angle is automatically adjusted for cooling and heating operation.



nanoe™ X Generator Mark3

nanoe™ X contains plenty of OH radicals that have outstanding effects on various air pollutants, including bacteria and viruses, mould, allergens, pollen, hazardous substances, as well as deodorise odours. It also keeps moisture in your skin and hair.



Invisible Air Contaminants are Suppressed

K3_{TYPE} Wall Mounted


Model Name			S-22MK3E	S-28MK3E	S-36MK3E	S-45MK3E
Power source			220/230/240 V, 1 phase - 50/60 Hz			
Cooling capacity	kW		2.20	2.80	3.60	4.5
	BTU/h		7,500	9,600	12,300	15,400
Heating capacity	kW		2.50	3.20	4.20	5.0
	BTU/h		8,500	10,900	14,300	17,100
Power input	Cooling	kW	0.018/0.018/0.018	0.019/0.019/0.019	0.020/0.020/0.020	0.025/0.025/0.025
	Heating	kW	0.018/0.018/0.018	0.019/0.019/0.019	0.020/0.020/0.020	0.025/0.025/0.025
Running current	Cooling	A	0.19/0.19/0.19	0.20/0.20/0.20	0.22/0.22/0.22	0.25/0.25/0.25
	Heating	A	0.19/0.19/0.19	0.20/0.20/0.20	0.22/0.22/0.22	0.25/0.25/0.25
Fan	Type		Cross-flow fan	Cross-flow fan	Cross-flow fan	Cross-flow fan
	Air flow rate (H/M/L)	m ³ /h	540/480/420	570/510/420	630/540/450	690/600/450
		L/s	150/133/117	158/142/117	175/150/125	192/167/125
	Motor output	kW	0.03	0.03	0.03	0.03
Sound power level (H/M/L)			dB	47/45/44	50/47/44	53/48/44
Sound pressure level (H/M/L)			dB(A)	32/30/29	33/31/29	35/32/29
Dimensions H x W x D			mm	295×890×244	295×890×244	295×890×244
Pipe connections	Liquid	mm (inches)	Ø6.35(1/4)	Ø6.35(1/4)	Ø6.35(1/4)	Ø6.35(1/4)
	Gas	mm (inches)	Ø12.7(1/2)	Ø12.7(1/2)	Ø12.7(1/2)	Ø12.7(1/2)
	Drain piping	mm	Ø18	Ø18	Ø18	Ø18
Net weight			kg	12	12	12

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

K3 (22-45) TYPE WALL MOUNTED Dimensions

SIZE 22-45

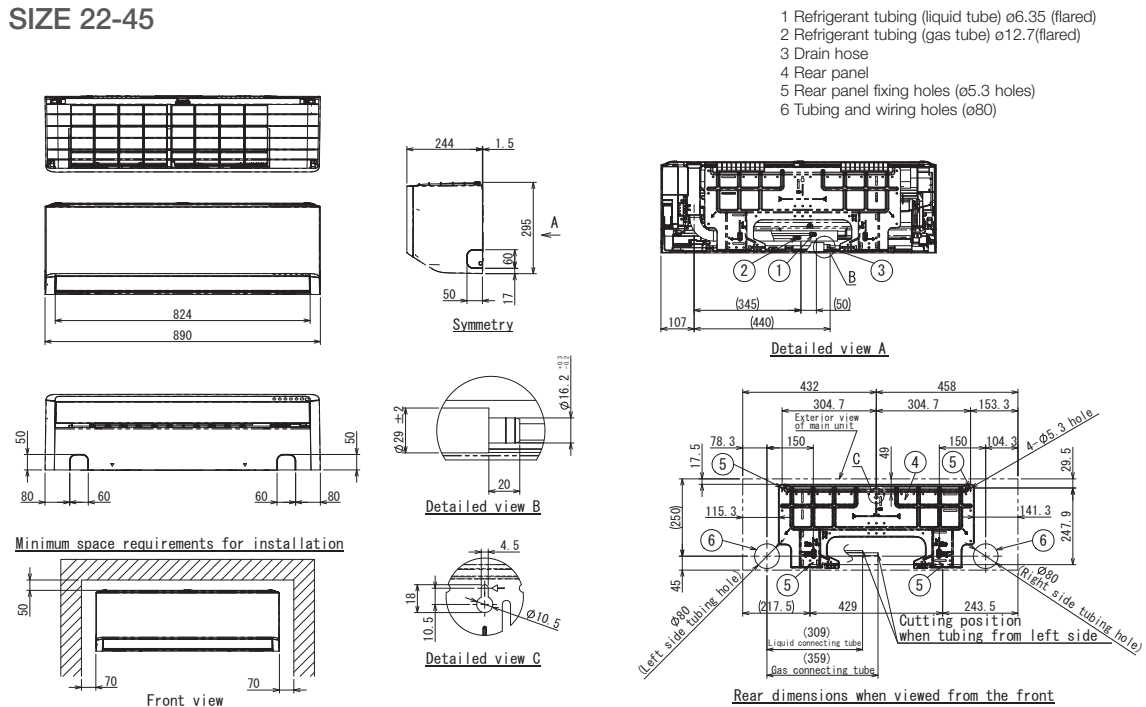


unit: mm

S-56MK3E	S-73MK3E	S-106MK3E
220/230/240 V, 1 phase - 50/60 Hz		
5.6	7.3	10.6
19,100	24,900	36,200
6.3	8.0	10.6
21,500	27,300	36,200
0.040/0.040/0.040	0.055/0.055/0.055	0.080/0.080/0.080
0.040/0.040/0.040	0.055/0.055/0.055	0.080/0.080/0.080
0.35/0.35/0.35	0.50/0.50/0.50	0.70/0.70/0.70
0.35/0.35/0.35	0.50/0.50/0.50	0.70/0.70/0.70
Cross-flow fan	Cross-flow fan	Cross-flow fan
900/840/780	1140/1020/840	1320/1080/840
250/233/217	317/283/233	367/300/233
0.03	0.03	0.03
55/53/50	62/59/55	65/60/55
40/38/35	47/44/40	50/45/40
295×1060×249	295×1060×249	295×1060×249
Ø6.35(1/4)	Ø9.52(3/8)	Ø9.52(3/8)
Ø12.7(1/2)	Ø15.88(5/8)	Ø15.88(5/8)
Ø18	Ø18	Ø18
14	14	14

K3 (56-106) TYPE WALL MOUNTED Dimensions

SIZE 56-106

- 1 Refrigerant tubing (liquid tube) Type 56 Ø6.35 (flared) Type 73-106 Ø9.52 (flared)
- 2 Refrigerant tubing (gas tube) Type 56 Ø12.7 (flared) Type 73-106 Ø15.88 (flared)
- 3 Drain hose
- 4 Rear panel
- 5 Rear panel fixing holes (Ø5.3 holes)
- 6 Tubing and wiring holes (ø80)

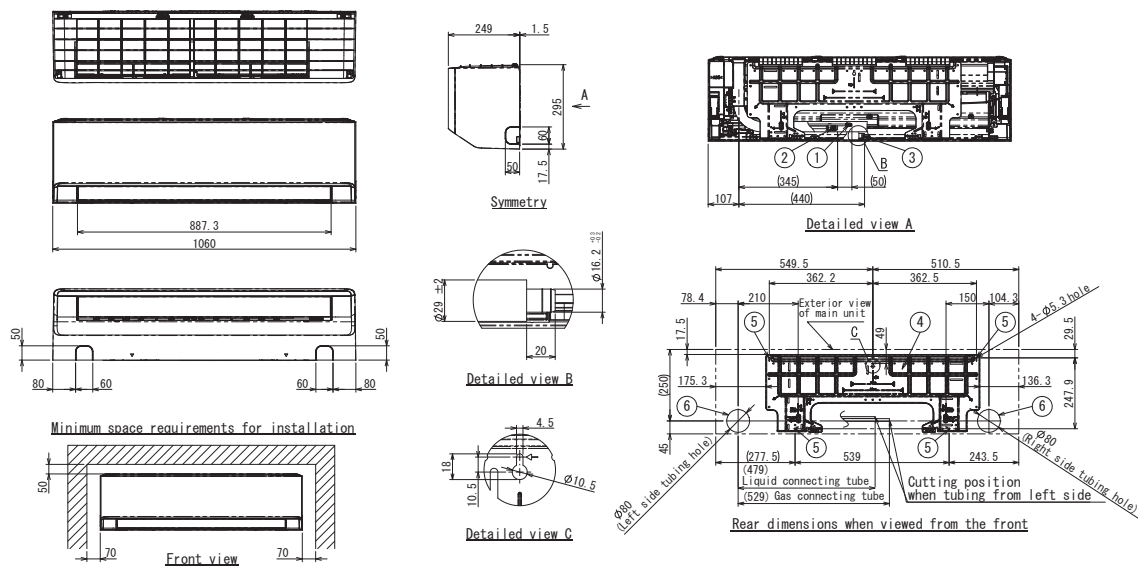

unit: mm

K2_{TYPE} Wall Mounted



The K2 type wall mounted unit has a stylish smooth design with a washable front panel. Small, lightweight and low noise level makes it ideal for small offices and other commercial applications.



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode



Intelligent Auto
Swing



Automatic
Restart
Function



Auto Swing
(Auto Flap Control)

Technical focus

- Closed discharge port when not in use
- Lighter and smaller units make installation easy
- Quiet operation
- Smooth and durable design
- Piping outlet in six directions
- Washable front panel
- Air distribution is automatically altered depending on the operational mode of the unit

Noise reducing external valve kit

To reduce noise level of expansion valve.
(Optional accessory)

CZ-P56SVK2 (for 22 - 56 type)
CZ-P160SVK2 (for 73* - 106 type)


*When the pipe diameter is (Liquid) Ø6.35 - (Gas) Ø12.7,
please use CZ-P56SVK2.



Closed discharge port

When the unit is turned off, the flap closes completely to prevent entry of dust into the unit and to keep the equipment clean.

Compact indoor units make the installation easy

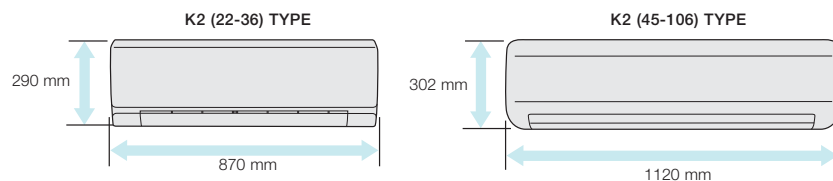



S-22MK2E5A / S-28MK2E5A
S-36MK2E5A



S-45MK2E5A / S-56MK2E5A
S-73MK2E5A / S-106MK2E5A

Optional accessory



* Receiver is included in the wall mounted indoor unit.

Quiet operation

Low operating noise level makes these units ideal for hotels and hospital applications.

Smooth and durable design

The smooth cover means these units match most modern interiors. Their compact size enables them to blend in, even in small spaces.

Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear, left bottom, making installation easier.


Washable front panel

The indoor unit's front panel can be easily removed and washed for trouble-free maintenance.



Air distribution is automatically adjusted depending on the operational mode of the unit

Air outlet angle is automatically adjusted for cooling and heating operation.



K2_{TYPE} Wall Mounted








Model Name			S-22MK2E5A	S-28MK2E5A	S-36MK2E5A	S-45MK2E5A
Power source			220/230/240 V, 1 phase - 50/60 Hz			
Cooling capacity		kW	2.20	2.80	3.60	4.5
		BTU/h	7,500	9,600	12,300	15,400
Heating capacity		kW	2.50	3.20	4.20	5.0
		BTU/h	8,500	10,900	14,300	17,100
Power input	Cooling	kW	0.025/0.025/0.025	0.025/0.025/0.025	0.030/0.030/0.030	0.030/0.030/0.030
	Heating	kW	0.025/0.025/0.025	0.025/0.025/0.025	0.030/0.030/0.030	0.030/0.030/0.030
Running current	Cooling	A	0.21	0.23	0.25	0.33/0.32/0.31
	Heating	A	0.21	0.23	0.25	0.33/0.32/0.31
Fan	Type		Cross-flow fan	Cross-flow fan	Cross-flow fan	Cross-flow fan
	Air flow rate (H/M/L)	m³/h	540/450/390	570/498/390	654/540/390	870/750/600
		L/s	150/125/108	158/138/108	182/150/108	242/208/167
	Motor output	kW	0.03	0.03	0.03	0.054
Sound power level (H/M/L)		dB	51/48/44	52/49/44	55/51/44	53/50/48
Sound pressure level (H/M/L)		dB(A)	36/33/29	37/34/29	40/36/29	38/35/33
Dimensions	H x W x D	mm	290 x 870 x 214	290 x 870 x 214	290 x 870 x 214	302 x 1,120 x 236
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping	mm	Ø18	Ø18	Ø18	Ø18
Net weight	kg	9	9	9	13	

Specifications are subject to change without notice.

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

K2 (22-36) TYPE WALL MOUNTED Dimensions

SIZE 22-36

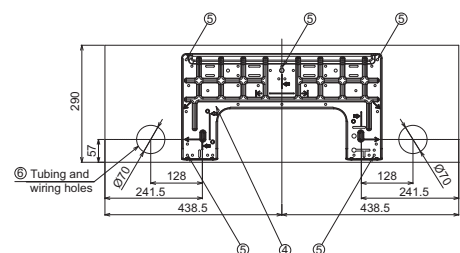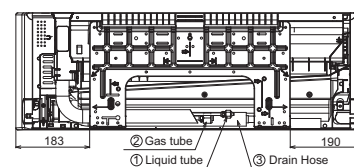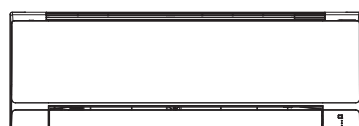


unit: mm

S-56MK2E5A	S-73MK2E5A	S-106MK2E5A
220/230/240 V, 1 phase - 50/60 Hz		
5.6	7.3	10.6
19,100	24,900	36,200
6.3	8.0	11.4
21,500	27,300	38,900
0.035/0.035/0.035	0.055/0.055/0.055	0.080/0.080/0.080
0.035/0.035/0.035	0.055/0.055/0.055	0.080/0.080/0.080
0.36/0.35/0.34	0.52/0.51/0.50	0.72/0.70/0.68
0.36/0.35/0.34	0.52/0.51/0.50	0.72/0.70/0.68
Cross-flow fan	Cross-flow fan	Cross-flow fan
960/840/720	1,170/1,020/840	1,290/1,110/900
267/233/200	325/283/233	358/308/250
0.054	0.054	0.054
55/52/50	62/59/55	64/61/57
40/37/35	47/44/40	49/46/42
302 x 1,120 x 236	302 x 1,120 x 236	302 x 1,120 x 236
Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
Ø18	Ø18	Ø18
13	14	14

SIZE 45-106

- | | | |
|--|---------------------------|-----------------------------|
| 1 Refrigerant tubing (liquid tube) | Type 45-56 Ø6.35 (flared) | Type 73-106 Ø9.52 (flared) |
| 2 Refrigerant tubing (gas tube) | Type 45-56 Ø12.7 (flared) | Type 73-106 Ø15.88 (flared) |
| 3 Drain hose | | |
| 4 Rear panel | | |
| 5 Rear panel fixing holes (Ø5.3 holes or as shown in figure "C") | | |
| 6 Tubing and wiring holes (Ø80) | | |

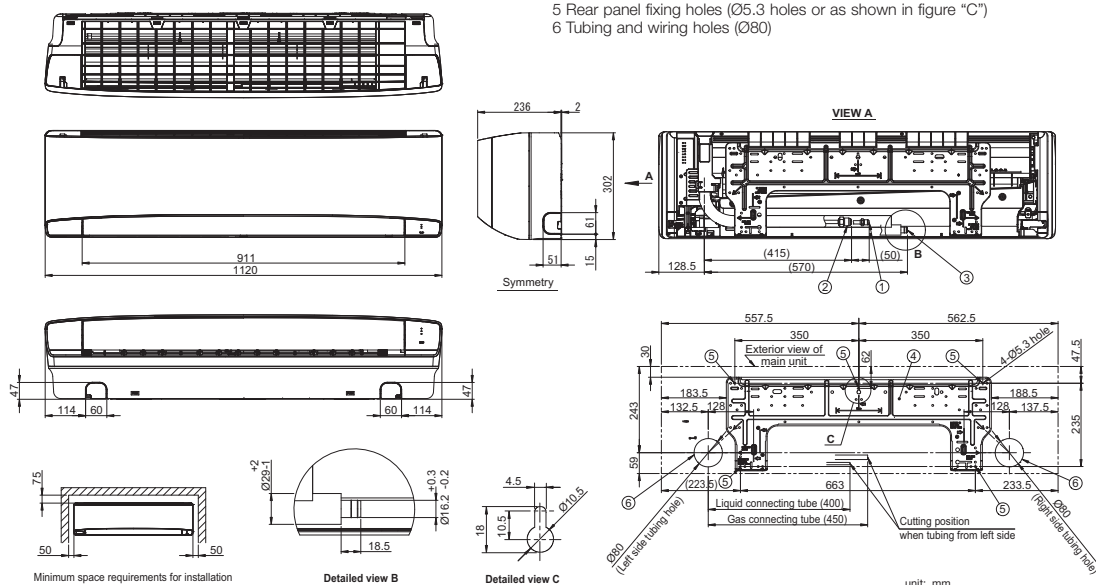

U2_{TYPE} 4-Way Cassette

Semi concealed cassette



Provides a neat fit in the ceiling to match modern décor, and uniform cooling throughout the room, and easy installation.

AIR INTAKE CHAMBER



- 1 [1] Air intake flange (ø100) (field supply)
- 2 Air intake box CZ-ATU2*(ø100)
- 3 Air intake plenum CZ-FDU3

* When using Air intake box (CZ-ATU2), Air intake plenum (CZ-FDU3) is required.

NEW PANEL DESIGN
Flat design, well-matched with interior, building.



Normal Panel : CZ-KPU3H
ECONAVI Panel : CZ-KPU3A



Self-diagnosing
Function



Automatic Fan
Operation



Dry mode



Intelligent Auto
Swing



Automatic
Restart
Function



Auto Swing
(Auto Flap Control)



Built-in Drain
Pump

Technical focus

- New high performance turbo fan, new path system for heat exchanger
- Lower noise in slow fan operation
- Industry top light weight, easy piping
- Easy installation structure of the panel
- Econavi : Floor temperature and human sensor added. Activity amount detection and new circulator
- nanoe™X : 100x for CAC (100 times more nanoe™ particle for wide commercial space). Inside cleaning by 100x nanoe™ + dry control


Flat Horizontal Design

The horizontal design of 4-way cassette achieves an elegant designed panel. Its slim design allow to protrude 33.5mm from the ceiling.



Drain pump of up to 850 mm from the ceiling surface

Built in drain pump allows flexible install and design options with up to 850mm lift. Long horizontal piping is also possible.



Easy to clean suction grille

Suction grille is able to make 90-degree turns.




360° Wide & Comfortable Airflow

Comfort air flow control and proper energy use. Flexible Air Flow direction control by individual flap control:


-4 Flaps can be controlled individually (by standard wired remote controller*)

-Versatile air flow control to cover a wide variety of demands.

Ample airflow: 36 m³/min

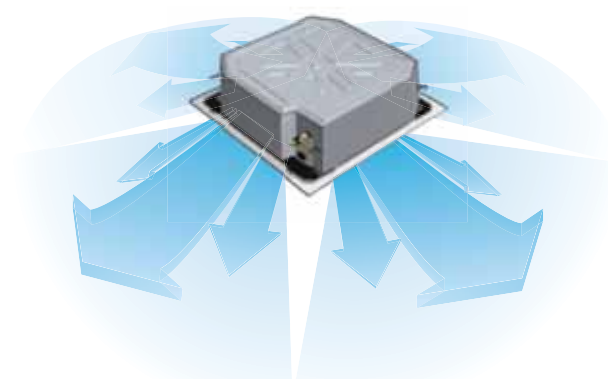

360° Wide



Temperature distribution by
thermograph
(cooling operation)



Simulation conditions:
140M 4-way ceiling-mounted cassette
type in cooling mode
/ Floor area of 225 m²
/ Ceiling height of 3 m

*Pre-setting is required for this function at System Test-run procedure

nanoe™ X Generator Mark3



Please refer to the nanoe™ X website for the Mark 3 information.



Optional accessory

ECONAVI ECONAVI ready



CZ-RTC6W



CZ-RTC6



CZ-RTC5B

CZ-RWS3
Remote controllerCZ-RWRU3
Receiver

High-ceiling installation (Up to 5 m for 10.6 kW and higher capacity models)

The units can be installed in rooms with high ceilings, where they provide ample floor-level heating in the winter. (See ceiling height guidelines below.)

High Ceiling (Factory settings)

New model			
Capacity	2.2-5.6kW	6.0-9.0kW	11.2-16.0kW
11.2-16.0kW			
Capacity	4-way discharge high ceiling setting 2	3-way discharge with the optional air-blocking materials	2-way discharge with the optional air-blocking materials

Ceiling height guidelines

*1 settings	4-way discharge			3-way discharge (optional air-blocking materials)	2-way discharge (optional air-blocking materials) *2
Indoor unit	Factory setting 1	High ceiling setting 1	High ceiling setting 2		
2.2-5.6kW	2.7	3.2	3.5	3.8	4.2
6.0-9.0kW	3.0	3.3	3.6	3.8	4.2
11.2-16.0kW	3.6	4.3	5.0	4.7	5.0

*1 When using the unit in a configuration other than the factory settings, it is necessary to make settings on site to increase airflow.

*2 Use air-blocking materials (CZ-CFU3) to completely block two discharge outlets for 2-way airflow.

Econavi panel is added into the line up

Continue Conventional function (Energy saving & comfort) and following are newly added.

- Energy saving function: comfortable energy saving based on temperature and humidity

- New circulate function that improves comfort
- Movement detection is improved improving comfort

Econavi energy saving function

Newly put humidity sensor on air suction part, and achieve more comfort and energy saving operation.

- Energy saving operation in case of low humidity during cooling operation

- Energy saving operation in case of high humidity during heating operation

Energy saving operation based on activity amount and comfort and energy saving based on temperature and humidity.

Panels & Panel parts

Normal panel: CZ-KPU3H

Econavi panel: CZ-KPU3A

Wireless receiver (option)



Econavi panel

nanoe™ X Generator Mark 3

nanoe™ X contains plenty of OH radicals that have outstanding effects on various air pollutants, including bacteria and viruses, mould, allergens, pollen, hazardous substances, as well as deodorise odours. It also keeps moisture in your skin and hair.

nanoe™ X Generator Mark3



Invisible Air Contaminants are Suppressed

U2_{TYPE} 4-WAY Cassette

Model Name		S-22MU2E5BN	S-28MU2E5BN	S-36MU2E5BN	S-45MU2E5BN	S-56MU2E5BN
Power source		220/230/240 V, 1 phase - 50Hz/60Hz				
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6
	BTU/h	7,500	9,600	12,300	15,400	19,100
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3
	BTU/h	8,500	10,900	14,300	17,100	21,500
Power input	Cooling	kW	0.020/0.020/0.020	0.020/0.020/0.020	0.020/0.020/0.020	0.025/0.025/0.025
	Heating	kW	0.020/0.020/0.020	0.020/0.020/0.020	0.020/0.020/0.020	0.025/0.025/0.025
Running current	Cooling	A	0.21/0.21/0.20	0.21/0.21/0.20	0.21/0.21/0.20	0.24/0.23/0.22
	Heating	A	0.20/0.20/0.19	0.20/0.20/0.19	0.20/0.20/0.19	0.23/0.22/0.21
Fan	Type	Turbo fan				
	Air flow rate (H/M/L)	m ³ /h	768/726/690	768/726/690	870/780/690	930/780/690
		L/s	213/202/192	213/202/192	242/217/192	258/217/192
	Motor output	kW	0.06	0.06	0.06	0.06
Sound power level (H/M/L)		dB	45/44/43	45/44/43	46/44/43	47/45/43
Sound pressure level (H/M/L)		dB(A)	30/29/28	30/29/28	31/29/28	32/30/28
Dimensions* H x W x D		mm	256+(33.5) x 840 (950) x 840 (950)			
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping		VP-25	VP-25	VP-25	VP-25
Net weight* (Panel)		kg	19 (+5)	19 (+5)	19 (+5)	19 (+5)

Global remarks	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

* The values in () for external dimensions and Net weight are the values for the optional ceiling panel.
In the case of nanoe X OFF
Specifications are subject to change without notice.

Standard Equipped nanoe™ Technology



- nanoe™ X, charged water particles, contain hydroxyl radical (OH radical) that work to provide quality air.
- The electrodes of nanoe™ X devices are made of titanium and electricity discharge into the water particles of nanoe™. So no need to clean or replace the device (maintenance free without wear).



Craftsmanship in Japan enables the adoption of titanium

Electrodes of nanoe™ X devices are produced with the support of craftsmen in Japan that has advanced expertise on processing ultra-small parts of titanium glass frames although titanium is very strong material and difficult to process.

nanoe™ X module

Unique nanoe™ X module casing releases 48 trillion hydroxyl radical (OH radical) per second.



nanoe™ X device


S-60MU2E5BN	S-73MU2E5BN	S-90MU2E5BN	S-112MU2E5BN	S-140MU2E5BN	S-160MU2E5BN
220/230/240 V, 1 phase - 50Hz/60Hz					
6.0	7.3	9.0	11.2	14.0	16.0
20,500	24,900	30,700	38,200	47,800	54,600
7.1	8.0	10.0	14.0	16.0	18.0
24,200	27,300	34,100	47,800	54,600	61,400
0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.095/0.095/0.095	0.095/0.095/0.095	0.105/0.105/0.105
0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.090/0.090/0.090	0.090/0.090/0.090	0.100/0.100/0.100
0.34/0.33/0.32	0.37/0.36/0.35	0.39/0.38/0.37	0.77/0.74/0.71	0.77/0.74/0.71	0.85/0.82/0.79
0.33/0.32/0.31	0.36/0.35/0.34	0.38/0.37/0.36	0.75/0.72/0.69	0.75/0.72/0.69	0.83/0.80/0.77
Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan
1,260/960/780	1,350/960/780	1,380/1,110/840	2,160/1,560/1,200	2,160/1,560/1,200	2,220/1,680/1,440
350/267/217	375/267/217	383/308/233	600/433/333	600/433/333	617/467/400
0.06	0.06	0.06	0.09	0.09	0.09
51/47/44	52/47/44	53/50/47	60/54/50	60/54/50	61/55/53
36/32/29	37/32/29	38/35/32	45/39/35	45/39/35	46/40/38
			319+(33.5) x 840 (950) x 840 (950)		
Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
20 (+5)	20 (+5)	20 (+5)	25 (+5)	25 (+5)	25 (+5)

U2 TYPE 4-WAY CASSETTE Dimensions

- 1 Air intake
- 2 Discharge outlet
- 3 Refrigerant tubing (liquid tube) 22-56 type ø6.35 (flared), 60-90 type ø9.52 (flared)
- 4 Refrigerant tubing (gas tube) 22-56 type ø12.7 (flared), 60-90 type ø15.88 (flared)
- 5 Drain tube connection port VP25 (outer dia. ø32)
- 6 Power supply port
- 7 Discharge duct connection port (ø150)
- 8 Suspension bolt hole (4-12×30 elongated hole)
- 9 Fresh air intake duct connection port (ø100) *
- 10 ECONAVI sensor (Only CZ-KPU3A)

*1: Necessary to attach duct connecting flange (field supplied).
Filter size: 520 x 520 x 15

	22~90 type	112~160 type
A	256	319
B	124	187

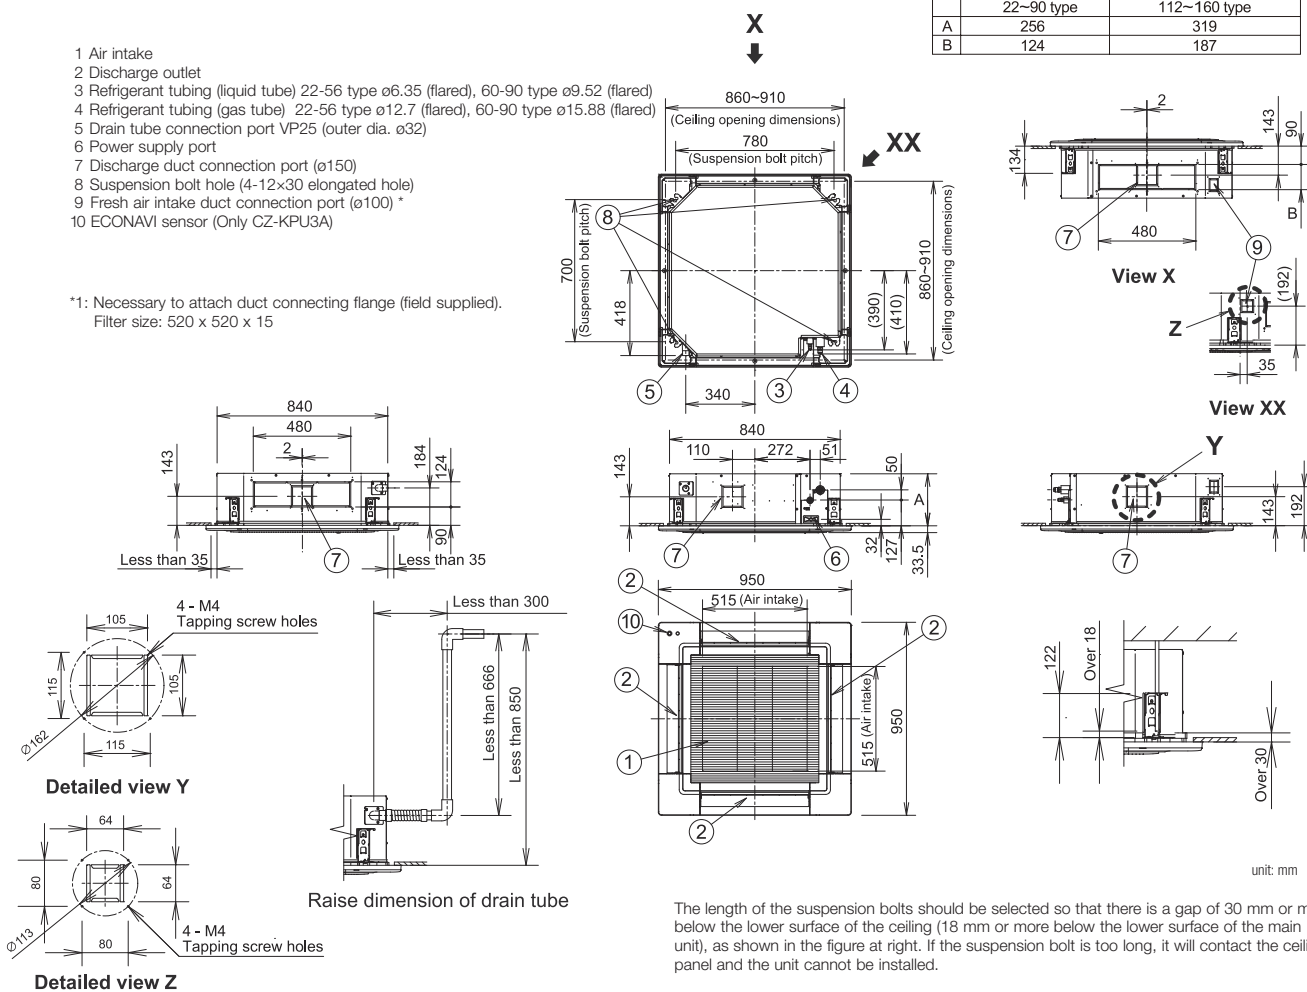

NEW**Y3_{TYPE}**

4-Way Mini Cassette

Mini semi concealed cassette



Designed to fit perfectly into a 60 x 60 cm ceiling grid without the need to alter the bar configuration, the Y3 is ideal for small commercial and retrofit applications. In addition, improvements to the Y3's efficiency make this model one of the most advanced units in the industry.



Self-diagnosing Function



Automatic Fan Operation



Dry mode



Auto Flap Control



Automatic Restart Function



Air Swing



Built-in Drain Pump

Technical focus

- Mini cassette fits into a 600 x 600 mm ceiling grid
- Powerful drain pump gives 850 mm lift
- Multi-directional air flow
- Easy installation
- DC fan motor with variable speed and a new heat exchanger ensures efficient power consumption
- nanoe™ X : 100x for CAC (100 times more nanoe™ particle for wide commercial space). Inside cleaning by 100x nanoe™ + dry control


Compact design

Thanks to advanced Panasonic design the panel is a compact 625 x 625 mm, offering elegant, unobtrusive installation even where space is limited.




Lighter and slimmer, easier installation

When only 230 mm of indoor body height, it can easily fit in limited spaces and tight spots.
(Required 243 mm from bottom of panel to top of the unit)

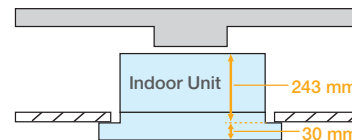


Individual flap control

Keep everyone comfortable by directing air where it's needed and away from where it isn't with individual flap control.



A drain height of up to 850 mm from the ceiling surface

The internal pump allows the drain pipe to be elevated up to 850 mm above the base of the unit.



nanoe™ X Generator Mark3

nanoe™ X contains plenty of OH radicals that have outstanding effects on various air pollutants, including bacteria and viruses, mould, allergens, pollen, hazardous substances, as well as deodorise odours. It also keeps moisture in your skin and hair.

nanoe™ X
Generator Mark3



Invisible Air Contaminants are Suppressed

nanoe™ X
Generator Mark3




Please refer to the nanoe™ X website for the Mark 3 information.



Panel
CZ-KPY4

Optional accessory

ECONAVI
ECONAVI ready



CZ-RTC6W
CZ-RTC6WBLW2



CZ-RTC6



CZ-CENSC1



CZ-RTC5B



CZ-RWS3

Remote controller



CZ-RWRY3


Receiver

Model Name		S-22MY3EB	S-28MY3EB	S-36MY3EB	S-45MY3EB	S-56MY3EB
Power source		220/230/240 V, 1 phase - 50Hz/60Hz				
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6
	BTU/h	7,500	9,600	12,300	15,400	19,100
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3
	BTU/h	8,500	10,900	14,300	17,100	21,500
Power input	Cooling kW	0.020	0.021	0.022	0.030	0.042
	Heating kW	0.018	0.019	0.020	0.028	0.040
Running amperes	Cooling A	0.25 0.24 0.23	0.26 0.25 0.24	0.27 0.26 0.25	0.35 0.34 0.33	0.44 0.43 0.42
	Heating A	0.22 0.21 0.20	0.23 0.22 0.21	0.24 0.23 0.22	0.32 0.31 0.30	0.41 0.40 0.39
Fan motor	Type	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan
	Airflow rate (H/M/L)	522/420/360	540/450/360	570/468/360	690/540/390	810/630/480
Sound power level (H/M/L)	L/s	145/117/100	150/125/100	158/130/100	192/150/108	225/175/133
	Output kW	0.03	0.03	0.03	0.03	0.03
Sound pressure level (H/M/L)	Cooling dB	48/45/43	49/45/43	50/46/43	54/49/45	57/52/48
	Heating dB	48/45/43	49/45/43	50/46/43	54/49/45	57/52/48
Dimensions*	Cooling dB(A)	33/30/28	34/30/28	35/31/28	39/34/30	42/37/33
	Heating dB(A)	33/30/28	34/30/28	35/31/28	39/34/30	42/37/33
Pipe connections	H x W x D mm	243(+30) x 575(625) x 575(625)	243(+30) x 575(625) x 575(625)	243(+30) x 575(625) x 575(625)	243(+30) x 575(625) x 575(625)	243(+30) x 575(625) x 575(625)
	Liquid mm (inches)	Ø6.35	Ø6.35	Ø6.35	Ø6.35	Ø6.35
Net weight*	Gas mm (inches)	Ø12.7	Ø12.7	Ø12.7	Ø12.7	Ø12.7
	Drain piping	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight*	kg	15(+2.8)	15(+2.8)	15(+2.8)	15(+2.8)	15(+2.8)

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

* The values in () for external dimensions and Net weight are the values for the optional ceiling panel.
Specifications are subject to change without notice.

Y3 TYPE 4-WAY MINI CASSETTE Dimensions

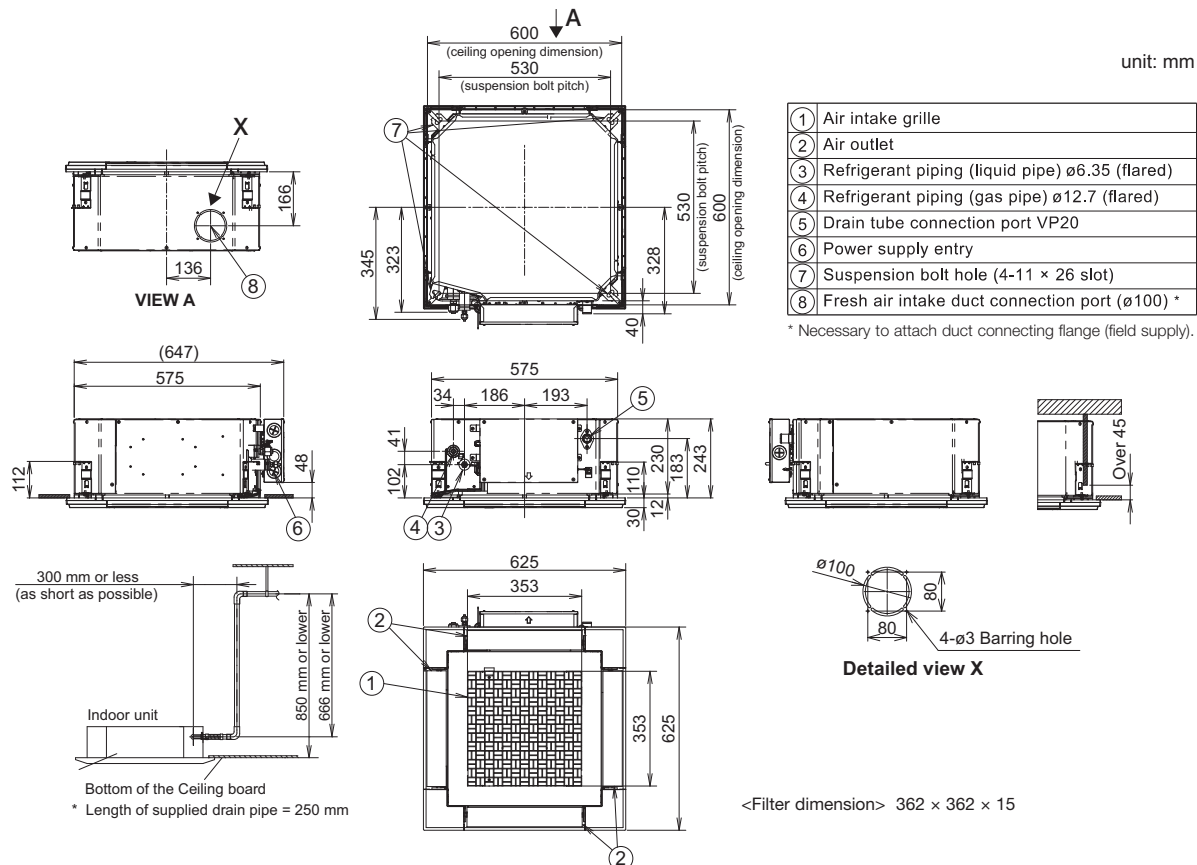

L1 TYPE 2-Way Cassette

The L1 is very thin, compact and light, allowing flexible install options.
A redesigned fan has been used to achieve this size and weight reduction.

PANEL



CZ-02KPL2

Big size panel (for S-73ML1E5)
CZ-03KPL2Self-diagnosing
FunctionAutomatic
Fan
Operation

Dry mode


Intelligent Auto
SwingAutomatic
Restart
FunctionAuto Swing
(Auto Flap Control)Built-in Drain
Pump

Technical focus

- Airflow and distribution is automatically altered depending on the operational mode of the unit
- Drain up is possible up to 500 mm via the built-in drain pump
- Simple maintenance


Auto flap control

Airflow and distribution is automatically altered depending on the operational mode (cooling or heating) of the unit.

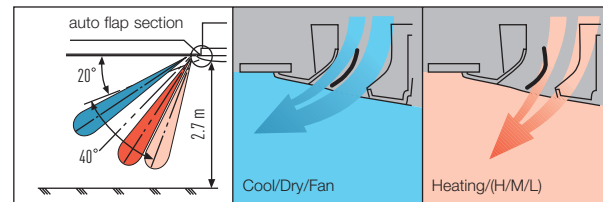

Drain up is possible up to 500 mm via the built-in drain pump.

Maintenance of the drain pump is possible from both sides, from the left side (piping side) and from the inside of the unit.

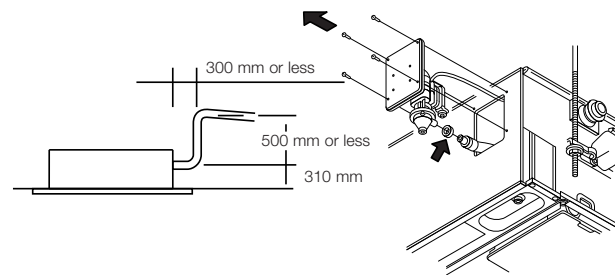

Simple maintenance

The drain pan is equipped with site wiring and can be removed. The fan case has a split construction, and the fan motor can be removed easily when the lower case is removed.



Optional accessory



CZ-RTC6W



CZ-RTC6



CZ-RTC5B

CZ-RWS3
Remote controllerCZ-RWRL3
Receiver



Model Name		S-22ML1E5	S-28ML1E5	S-36ML1E5	S-45ML1E5	S-56ML1E5	S-73ML1E5
Power source		220/230/240 V, 1 phase - 50/60 Hz					
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.3
	BTU/h	7,500	9,600	12,000	15,000	19,000	25,000
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3	8.0
	BTU/h	8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling kW	0.086/0.090/0.095	0.086/0.092/0.097	0.088/0.093/0.099	0.091/0.097/0.103	0.091/0.097/0.103	0.135/0.145/0.154
	Heating kW	0.055/0.058/0.062	0.055/0.060/0.064	0.057/0.061/0.066	0.060/0.065/0.070	0.060/0.065/0.070	0.100/0.109/0.117
Running current	Cooling A	0.45/0.45/0.45	0.44/0.45/0.45	0.44/0.45/0.45	0.45/0.45/0.45	0.45/0.45/0.45	0.64/0.65/0.66
	Heating A	0.29/0.29/0.30	0.28/0.29/0.30	0.28/0.29/0.30	0.29/0.29/0.30	0.29/0.29/0.30	0.46/0.48/0.49
Fan	Type	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m ³ /h	480/420/360	540/480/420	580/520/460	660/540/480	1,140/960/840
		L/s	133/117/100	150/133/117	161/144/128	183/150/133	317/267/233
	Motor output	kW	0.03	0.03	0.03	0.03	0.05
Sound power level (H/M/L)		dB	40/38/35	44/40/37	45/42/39	46/44/40	49/46/44
Sound pressure level (H/M/L)		dB(A)	30/27/24	33/29/26	34/31/28	35/33/29	38/35/33
Dimensions *	H x W x D	mm	350+8)x840 (1,060) x600 (680)	350+8)x840 (1,060) x600 (680)	350+8)x840 (1,060) x600 (680)	350+8)x840 (1,060) x600 (680)	350+8)x 1,140 (1,360) x600 (680)
	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
Drain piping			VP-25	VP-25	VP-25	VP-25	VP-25
Net weight *		kg	23 (+5.5)	23 (+5.5)	23 (+5.5)	23 (+5.5)	30 (+9)

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB


* The values in () for external dimensions and Net weight are the values for the optional ceiling panel.
Specifications are subject to change without notice.

L1 TYPE 2-WAY CASSETTE Dimensions

- 1 Air intake
- 2 Air outlet
- 3 Ceiling opening dimensions
- 4 Suspension fitting (notch: 12 mm)
- 5 Refrigerant piping (liquid pipes)
- 6 Refrigerant piping (gas pipes)
- 7 Drain connection VP25 (outer diameter ϕ 32)
- 8 Inlet for option cord between power supply and unit
- 9 Drain pan, drain pump inspection lid
- 10 Drain pump inspection lid
- 11 Round flange (field supply) mounting part (fresh air inlet ϕ 125)
- 12 Discharge duct (field supply) mounting part (installation possible only on the right side)
- 13 Wireless remote controller (option) signal receiver installation part

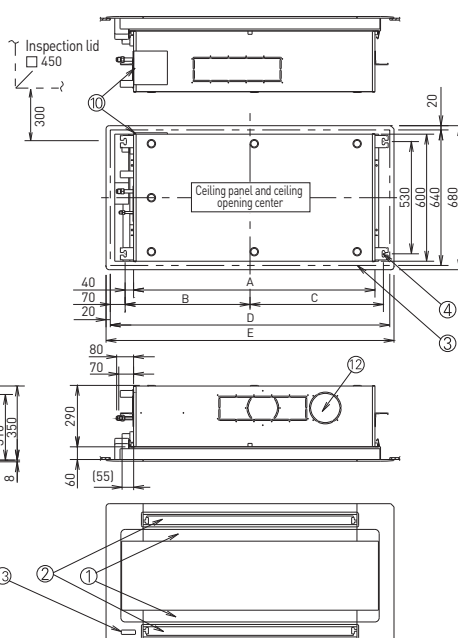

	22~56 type	73 type
A	840	1,140
B	440	590
C	480	630
D	1,020	1,320
E	1,060	1,360
③ Ceiling opening dimensions	1,020x640	1,320x640
⑤ Refrigerant piping (liquid pipes)	ø6.35	ø9.52
⑥ Refrigerant piping (gas pipes)	ø12.7	ø15.88
⑦ Duct connection port (only on the right side)	⑦ x 1 pc.	⑦ x 2 pc.



unit: mm

D1^{TYPE} 1-Way Cassette

Semi concealed slim cassette



Designed for installation within the ceiling void, the D1 range of slimline 1 way cassettes feature a quiet yet powerful fan that can reach the floor up 4.2 m from ceiling height.



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode



Intelligent Auto
Swing



Automatic
Restart
Function



Auto Swing
(Auto Flap Control)




Built-in Drain
Pump

Technical focus

- Ultra-Slim profile
- Suitable for standard and high ceilings
- Built-in drain pump provides 590 mm lift from ceiling
- Easy to install and maintain
- Hanging height can be easily adjusted
- Uses a DC fan motor to improve energy-efficiency

Drain height

A built-in drain pump provides up to 590mm lift from ceiling height for flexible install options.

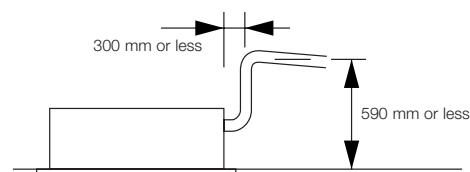

With 3 types of air-blow systems, the units can be used in various ways.



(1) One-direction “down-blow” system

Powerful one-direction “down-blow” system reaches the floor even from high ceilings (up to 4.2 m).



(2) Two-direction ceiling-mounted system

“Down-blow” and “front-blow” systems are combined in a ceiling-mounted unit to blow air over a wide area.



(3) One-direction ceiling-mounted system

This powerful ceiling-mounted “front-blow” system efficiently air-conditions the space in front of the unit.
(Additional accessories required)

PANEL

CZ-KPD2

Optional accessory



CZ-RTC6W



CZ-RTC6




CZ-RTC5B

CZ-RWS3
Remote controllerCZ-RWRD3
Receiver

Model Name			S-28MD1E5	S-36MD1E5	S-45MD1E5	S-56MD1E5	S-73MD1E5
Power source			220/230/240 V, 1 phase - 50/60 Hz				
Cooling capacity	kW		2.8	3.6	4.5	5.6	7.3
	BTU/h		9,600	12,000	15,000	19,000	25,000
Heating capacity	kW		3.2	4.2	5.0	6.3	8.0
	BTU/h		11,000	14,000	17,000	21,000	27,000
Power input	Cooling	kW	0.050/0.051/0.052	0.050/0.051/0.052	0.050/0.051/0.052	0.058/0.060/0.061	0.086/0.087/0.089
	Heating	kW	0.039/0.040/0.042	0.039/0.040/0.042	0.039/0.040/0.042	0.046/0.048/0.049	0.075/0.076/0.077
Running current	Cooling	A	0.40/0.39/0.39	0.40/0.39/0.39	0.40/0.39/0.39	0.46/0.46/0.46	0.71/0.70/0.69
	Heating	A	0.36/0.35/0.35	0.36/0.35/0.35	0.36/0.35/0.35	0.42/0.41/0.41	0.66/0.65/0.63
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	720/600/540	720/600/540	720/660/600	780/690/600	1,080/900/780
		L/s	200/167/150	200/167/150	200/183/167	217/192/167	300/250/217
	Motor output	kW	0.05	0.05	0.05	0.05	0.05
Sound power level (H/M/L)	dB		47/45/44	47/45/44	47/46/45	49/47/45	56/51/47
Sound pressure level (H/M/L)	dB(A)		36/34/33	36/34/33	36/35/34	38/36/34	45/40/36
Dimensions *	H x W x D	mm	200+(20) x 1,000 (1,230) x 710 (800)	200+(20) x 1,000 (1,230) x 710 (800)	200+(20) x 1,000 (1,230) x 710 (800)	200+(20) x 1,000 (1,230) x 710 (800)	200+(20) x 1,000 (1,230) x 710 (800)
	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
Pipe connections	Drain piping		VP-25	VP-25	VP-25	VP-25	VP-25
Net weight *	kg		21 (+5.5)	21 (+5.5)	21 (+5.5)	21 (+5.5)	22 (+5.5)
GLOBAL REMARKS	Rated conditions:		Cooling	Heating	* The values in () for external dimensions and Net weight are the values for the optional ceiling panel. Specifications are subject to change without notice.		
	Indoor air temperature		27°C DB / 19°C WB	20°C DB			
	Outdoor air temperature		35°C DB / 24°C WB	7°C DB / 6°C WB			

D1 TYPE 1-WAY CASSETTE Dimensions

- 1 Air intake grille
- 2 Air outlet
- 3 Refrigerant piping (liquid pipes)
Size 28 to 56: Ø6.35 (flared)
Size 73: Ø9.52 (flared)
- 4 Refrigerant piping (gas pipes)
Size 28 to 56: Ø12.7 (flared)
Size 73: Ø15.88 (flared)
- 5 Drain connection VP25 (outer Ø32)
- 6 Power supply entry
- 7 Discharge duct connection port (for descending ceiling)
- 8 Wireless remote control receiver (option)
- 9 Suspension mounting (4-12 x 30 slot)
- 10 Fresh air intake (Ø100)

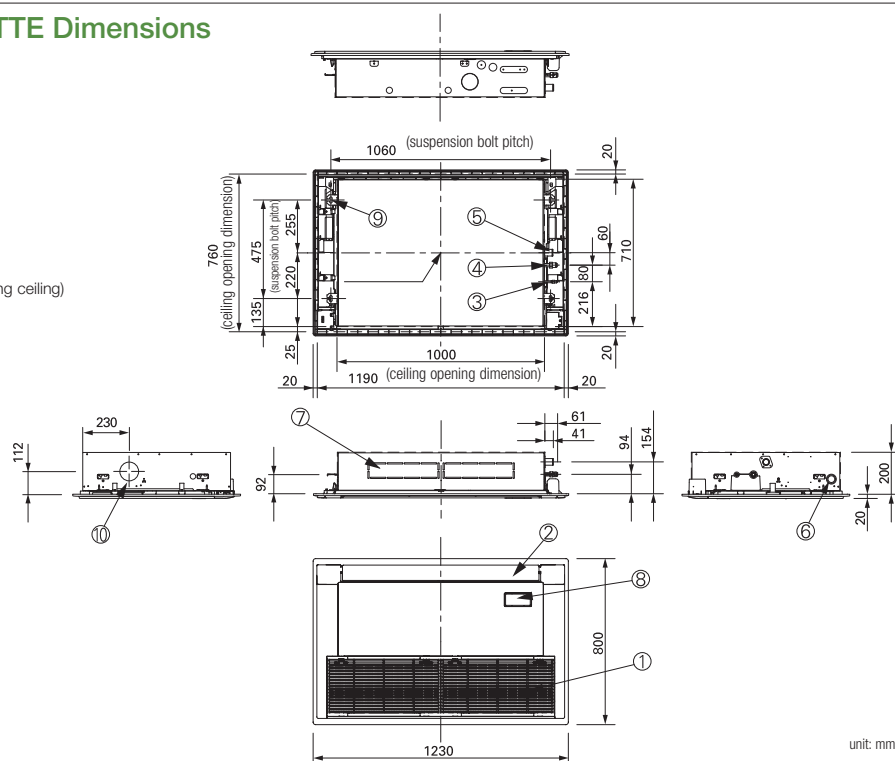

T2_{TYPE} Ceiling Mounted

Ceiling mounted



S-36MT2E5A / S-45MT2E5A
S-56MT2E5A

Providing outstanding energy-saving performance and comfortable, long-distance air flow distribution, it's recommended for stores and schools.



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode



Intelligent Auto
Swing



Automatic
Restart
Function



Auto Swing
(Auto Flap Control)

Technical focus

- Lower sound levels
- Standardised height and depth for all models
- Long and wide air distribution
- Easy to install and maintain
- Fresh air knockout

Compact Looking, Stylish, One-Motion Design

With its streamlined, one-motion form, the unit looks slim and compact when installed for a neat appearance in any room. When not operating, the louver closes to provide an elegant look while keeping the unit clean.



Energy-Saving Technology Delivering Top-Class Efficiency


Optimization of the shape of the casing and fan assures bigger air flow and higher efficiency.
Energy-saving performance is top class in the industry.

Top Class Energy Saving

Large Diagonal Air Flow Fan




DC motor



Comfortable, Long-Distance Air Flow Distribution

The shape of the outlet has been optimized to provide long-distance air flow distribution. Even in deep spaces, air flow reaches every corner for exceptionally comfortable air conditioning.


High Ceiling Setting *Setting by remote control	Air flow distance
4.3m	140
	13m

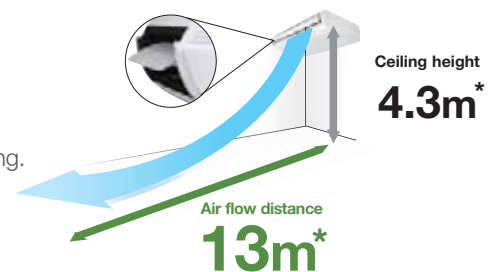

*Results are based on specific testing conditions.

Multiple Piping Directions For Flexible Installation

The 5-directional drain pipe and 3-directional refrigerant pipe make installation much easier. And the neat fit with walls and ceilings assures more installation flexibility.

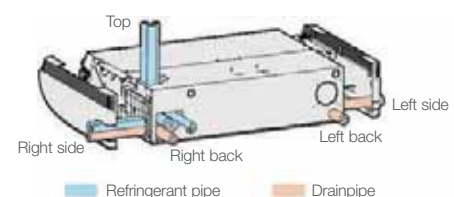

Optional accessory



S-73MT2E5A

S-106MT2E5A
S-140MT2E5A

ECONAVI
ECONAVI ready



CZ-RTC6W



CZ-RTC6



CZ-CENSC1



CZ-RTC5B

CZ-RWS3
Remote controllerCZ-RWRT3
Receiver

Model Name			S-36MT2E5A	S-45MT2E5A	S-56MT2E5A	S-73MT2E5A	S-106MT2E5A	S-140MT2E5A
Power source			220/230/240 V, 1 phase - 50/60 Hz					
Cooling capacity	kW		3.6	4.5	5.6	7.3	10.6	14.0
	BTU/h		12,300	15,400	19,100	24,900	36,200	47,800
Heating capacity	kW		4.2	5.0	6.3	8.0	11.4	16.0
	BTU/h		14,300	17,100	21,500	27,300	38,900	54,600
Power input	Cooling	kW	0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.055/0.055/0.055	0.080/0.080/0.080	0.100/0.100/0.100
	Heating	kW	0.035/0.035/0.035	0.040/0.040/0.040	0.040/0.040/0.040	0.055/0.055/0.055	0.080/0.080/0.080	0.100/0.100/0.100
Running current	Cooling	A	0.37/0.36/0.35	0.39/0.38/0.37	0.39/0.38/0.37	0.45/0.44/0.43	0.69/0.67/0.65	0.82/0.79/0.77
	Heating	A	0.37/0.36/0.35	0.39/0.38/0.37	0.39/0.38/0.37	0.45/0.44/0.43	0.69/0.67/0.65	0.82/0.79/0.77
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	840/720/630	900/750/630	900/750/630	1,260/1,080/930	1,800/1,500/1,380	1,920/1,680/1,440
		L/s	233/200/175	250/208/175	250/208/175	350/300/258	500/417/383	533/467/400
	Motor output	kW	0.043	0.043	0.043	0.074	0.111	0.111
Sound power level (H/M/L)			dB	54/50/48	55/51/48	57/53/51	60/55/54	62/58/55
Sound pressure level (H/M/L)			dB(A)	36/32/30	37/33/30	39/35/33	42/37/36	44/40/37
Dimensions	H x W x D	mm	235 x 960 x 690	235 x 960 x 690	235 x 960 x 690	235 x 1,275 x 690	235 x 1,590 x 690	235 x 1,590 x 690
		Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)
		Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)	Ø15.88 (Ø5/8)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight			kg	27	27	33	40	40


GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

T2 TYPE CEILING Dimensions

SIZE 36-56


- 1 Drain port VP20 (inside diameter Ø26mm, drain hose supplied)
- 2 Left drain position
- 3 Refrigerant piping (liquid pipes)
Size 36 to 56: Ø6.35 (flared)
Size 73 to 140: Ø9.52 (flared)
- 4 Refrigerant piping (gas pipes)
Size 36 to 56: Ø12.7 (flared)
Size 73 to 140: Ø15.88 (flared)

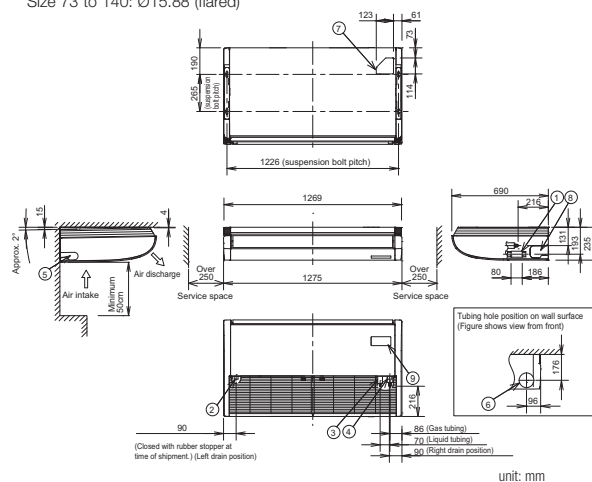

unit: mm

SIZE 73-140

- 5 Left side drain hose outlet port (cutout)
- 6 Piping hole on wall surface Ø100mm
- 7 Upper side piping port
- 8 Right side drain hose outlet port (cutout)
- 9 Wireless remote controller receiver installation location

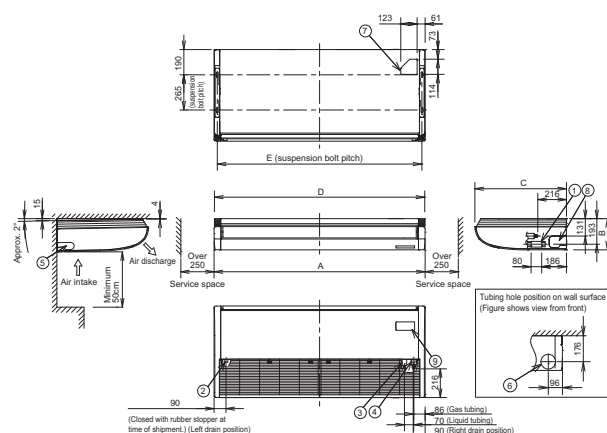

	A	B	C	D	E
106-140 type	1,590	235	690	1,584	1,541
73 type	1,275	235	690	1,269	1,226

unit: mm

G1^{TYPE} Floor Console

nanoeTM X
Generator Mark1

Compact and versatile, this system is capable of being installed in an area with limited space. It is a perfect solution for retrofit, replacing existing radiator panels.



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode



Automatic
Restart
Function

Technical focus

- Clean and stylish design with slim depth
- Modern matt white color panel
- Flexible and easy installation
- Washable air filter
- Quiet operation
- Dry mode to reduce humidity in rooms
- nanoeTM X with nano-technology, nano-sized electrostatic atomised water particles purify the air in the room

Stylish and simple

The stylish and compact unit profile, also used for residential market range, is easy to integrate into any design of building.




Dimension:
W x H x D = 750 x 600 x
207mm

Weight:
14kg

Flexible easy installation

Four different mounting styles possible: Exposed (floor or wall), semi-recessed and recessed

The compact unit can be installed within a limited space, such as under a window. Thus, it is a perfect solution to replace an existing boiler system radiator.

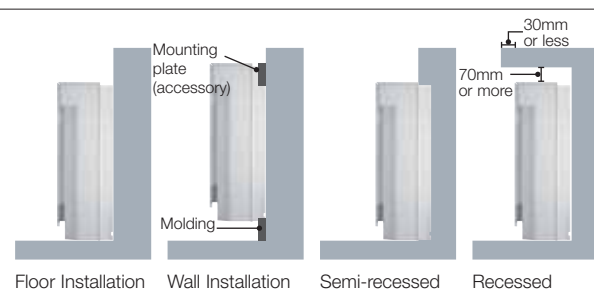


Functions for comfort

- Double Air Flow direction to maximize comfort
- Self-cleaning function

Self-cleaning function.

Self cleaning function can be pre-scheduled with remote controller, up to a maximum of 90 minutes following cooling/dry operation. Air flow will not blow directly at occupants during self-cleaning.

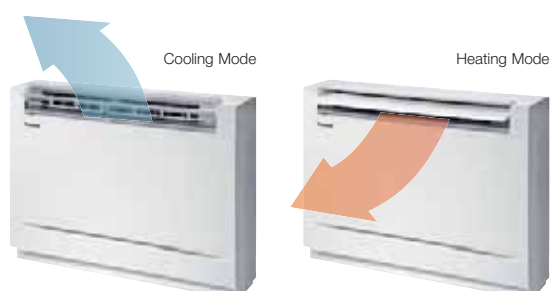



Optional accessory



CZ-RTC6W



CZ-RTC6



CZ-RTC5B

CZ-RWS3
Remote controllerCZ-RWRC3
Receiver

Model Name			S-22MG1E5N	S-28MG1E5N	S-36MG1E5N	S-45MG1E5N	S-56MG1E5N
Power source			220/230/240 V, 1 phase - 50 / 60 Hz				
Cooling capacity	kW		2.2	2.8	3.6	4.5	5.6
	BTU/h		7,500	9,600	12,300	15,400	19,100
Heating capacity	kW		2.5	3.2	4.2	5.0	6.3
	BTU/h		8,500	10,900	14,300	17,100	21,500
Power input	Cooling	kW	0.018/0.018/0.018	0.018/0.018/0.018	0.021/0.021/0.021	0.023/0.023/0.023	0.025/0.025/0.025
	Heating	kW	0.018/0.018/0.018	0.018/0.018/0.018	0.022/0.022/0.022	0.024/0.024/0.024	0.026/0.026/0.026
Running current	Cooling	A	0.18/0.18/0.18	0.18/0.18/0.18	0.21/0.21/0.21	0.23/0.23/0.23	0.25/0.25/0.25
	Heating	A	0.18/0.18/0.18	0.18/0.18/0.18	0.22/0.22/0.22	0.24/0.24/0.24	0.26/0.26/0.26
Fan	Type		Cross flow	Cross flow	Cross flow	Cross flow	Cross flow
	Air flow rate (H/M/L)	m³/h	552/450/360	552/450/360	582/492/360	630/540/390	720/570/390
		L/s	153/125/100	153/125/100	162/137/100	175/150/108	200/158/108
	Motor output	kW	0.03	0.03	0.03	0.03	0.03
Sound power level (H/M/L)	dB		52/49/44	52/49/44	53/50/44	56/52/45	58/53/45
Sound pressure level (H/M/L)	dB(A)		38/34/29	38/34/29	39/35/29	42/37/30	44/38/30
Dimensions *	H x W x D	mm	600 x 750 x 207	600 x 750 x 207	600 x 750 x 207	600 x 750 x 207	600 x 750 x 207
Pipe connections	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20
Net weight *	kg		14	14	14	14	14





GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.
Infrared remote controller (CZ-RWS3) doesn't need receiver as an optional. Receiver is included in the unit shipment.

G1 TYPE FLOOR CONSOLE

Dimensions

- 1 Refrigerant piping (liquid pipes): Ø6.35 (flared)
2 Refrigerant piping (gas pipes): Ø9.52 (flared)
3 Drain hose



unit: mm

P1_{TYPE} Floor Standing

The compact floor standing P1 units are the ideal solution for providing perimeter air conditioning. A standard wired controller can be incorporated into the body of the unit.



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode




Automatic
Restart
Function


Technical focus

- Pipes can be connected to either side of the unit from the bottom or rear
- Easy to install
- Front panel opens fully for easy maintenance
- Removable air discharge grille gives flexible air flow

Effective perimeter air conditioning

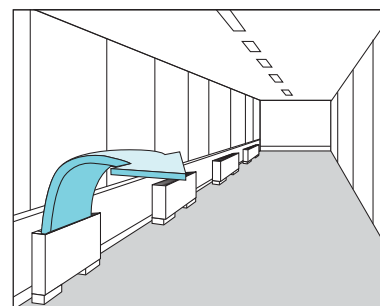

A wired remote control (CZ-RTC4A/CZ-RTC5B) can be installed in the body

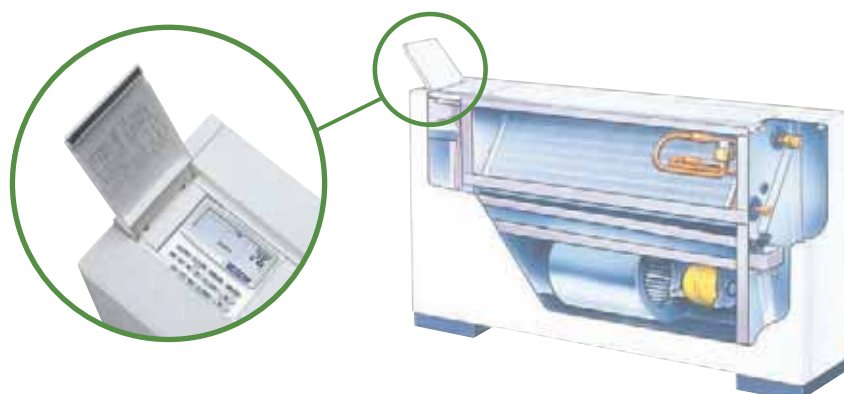



Optional accessory



Model Name		S-22MP1E5	S-28MP1E5	S-36MP1E5	S-45MP1E5	S-56MP1E5	S-71MP1E5
Power source		220/230/240 V, 1 phase - 50/60 Hz					
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1
	BTU/h	7,500	9,600	12,000	15,000	19,000	24,000
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3	8.0
	BTU/h	8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling kW	0.051/0.056/0.061	0.051/0.056/0.061	0.079/0.085/0.091	0.116/0.126/0.136	0.116/0.126/0.136	0.150/0.160/0.170
	Heating kW	0.036/0.040/0.045	0.036/0.040/0.045	0.064/0.070/0.076	0.079/0.091/0.101	0.079/0.091/0.101	0.110/0.120/0.130
Running current	Cooling A	0.24/0.25/0.26	0.24/0.25/0.26	0.37/0.38/0.39	0.54/0.56/0.58	0.54/0.56/0.58	0.70/0.72/0.73
	Heating A	0.17/0.18/0.19	0.17/0.18/0.19	0.30/0.31/0.32	0.37/0.41/0.43	0.37/0.41/0.43	0.52/0.54/0.56
Fan	Type	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	420/360/300	540/420/360	720/540/480	900/780/660	1,020/840/720
		L/s	117/100/83	150/117/100	200/150/133	250/217/183	283/233/200
	Motor output	kW	0.01	0.01	0.02	0.03	0.06
Sound power level (H/M/L)		dB	44/41/39	50/46/40	49/46/42	50/47/42	52/49/46
Sound pressure level (H/M/L)		dB(A)	33/30/28	33/30/28	38/35/31	39/36/31	41/38/35
Dimensions	H x W x D	mm	615 x 1,065 x 230	615 x 1,065 x 230	615 x 1,380 x 230	615 x 1,380 x 230	615 x 1,380 x 230
	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20
Net weight		kg	29	29	39	39	39

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB


Specifications are subject to change without notice.

P1 TYPE FLOOR STANDING

Dimensions

- 1 4 x Ø12 holes (for floor fixing)
- 2 Power supply outlet
- 3 Air filter
- 4 Refrigerant piping (liquid pipes)
- 5 Refrigerant piping (gas pipes)
- 6 Level adjustment bolt
- 7 Drain outlet VP20 (with vinyl hose)
- 8 Refrigerant piping connection port (bottom or rear)
- 9 Operation switch (remote controller RCS-SH80AG) mounting part
- 10 Electric equipment box
- 11 Accessory copper pipe for gas pipe connection

Indoor unit	A	B	C	Liquid pipes	Gas pipes
22 to 36 type	1,065	665	632	Ø6.35	Ø12.7
45 type					
56 type	1,380	980	947	Ø9.52	Ø15.88
71 type					

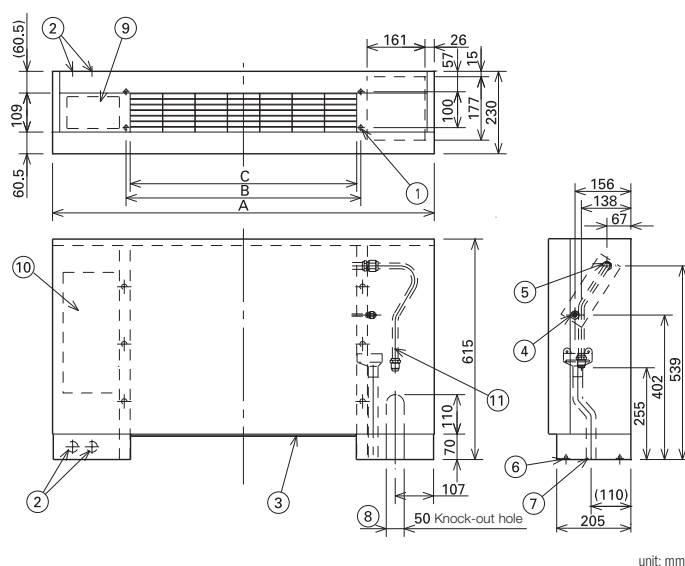

unit: mm

R1_{TYPE} Concealed Floor Standing

At just 229 mm deep, the R1 unit can be easily concealed in perimeter areas to provide powerful and effective air conditioning.



Self-diagnosing
Function



Automatic
Fan
Operation



Dry mode




Automatic
Restart
Function

Technical focus

- Chassis unit for discrete customisable installation
- Complete with removable filters
- Pipes can be connected to the unit either from the bottom or rear
- Easy to install

Perimeter air conditioning with high interior quality

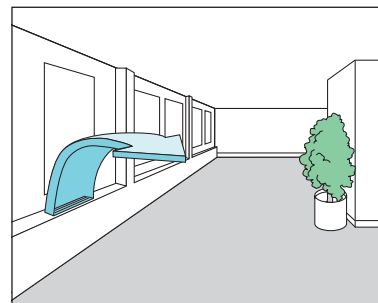



Optional accessory




Model Name			S-22MR1E5	S-28MR1E5	S-36MR1E5	S-45MR1E5	S-56MR1E5	S-71MR1E5
Power source			220/230/240 V, 1 phase - 50/60 Hz					
Cooling capacity	kW		2.2	2.8	3.6	4.5	5.6	7.1
	BTU/h		7,500	9,600	12,000	15,000	19,000	24,000
Heating capacity	kW		2.5	3.2	4.2	5.0	6.3	8.0
	BTU/h		8,500	11,000	14,000	17,000	21,000	27,000
Power input	Cooling	kW	0.051/0.056/0.061	0.051/0.056/0.061	0.079/0.085/0.091	0.116/0.126/0.136	0.116/0.126/0.136	0.150/0.160/0.170
	Heating	kW	0.036/0.040/0.045	0.036/0.040/0.045	0.064/0.070/0.076	0.079/0.091/0.101	0.079/0.091/0.101	0.110/0.120/0.130
Running current	Cooling	A	0.24/0.25/0.26	0.24/0.25/0.26	0.37/0.38/0.39	0.54/0.56/0.58	0.54/0.56/0.58	0.70/0.72/0.73
	Heating	A	0.17/0.18/0.19	0.17/0.18/0.19	0.30/0.31/0.32	0.37/0.41/0.43	0.37/0.41/0.43	0.52/0.54/0.56
Fan	Type		Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
	Air flow rate (H/M/L)	m³/h	420/360/300	420/360/300	540/420/360	720/540/480	900/780/660	1,020/840/720
		L/s	117/100/183	117/100/183	150/117/100	200/150/133	250/217/183	283/233/200
	Motor output	kW	0.01	0.01	0.02	0.02	0.03	0.06
Sound power level (H/M/L)			dB	44/41/39	44/41/39	50/46/40	49/46/42	49/46/42
Sound pressure level (H/M/L)			dB(A)	33/30/28	33/30/28	39/35/29	38/35/31	39/36/31
Dimensions	H x W x D	mm	616 x 904 x 229	616 x 904 x 229	616 x 904 x 229	616 x 1,219 x 229	616 x 1,219 x 229	616 x 1,219 x 229
	Liquid	mm (inches)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
	Gas 410 A	mm (inches)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
	Drain piping		VP-20	VP-20	VP-20	VP-20	VP-20	VP-20
Net weight			kg	21	21	28	28	28

GLOBAL REMARKS	Rated conditions:	Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB
	Outdoor air temperature	35°C DB / 24°C WB	7°C DB / 6°C WB

Specifications are subject to change without notice.

R1 TYPE CONCEALED FLOOR STANDING Dimensions

- 1 4 x Ø12 holes (for floor fixing)
- 2 Electric equipment box
- 3 Power supply outlet
- 4 Air filter
- 5 Discharge duct connection flange
- 6 Refrigerant connection outlet (liquid pipes)
- 7 Refrigerant connection outlet (gas pipes)
- 8 Drain filter
- 9 Drain pan
- 10 Level adjustment bolt
- 11 Drain outlet VP20 (with vinyl hose)

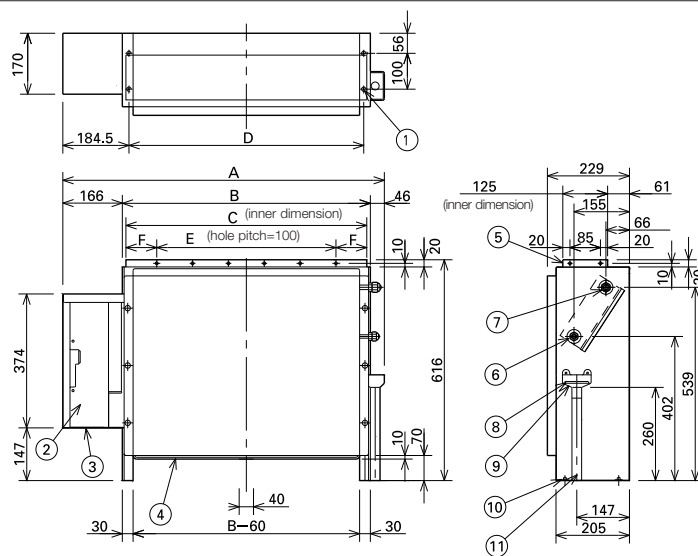

unit: mm

Indoor unit	A	B	C	D	E	F	Liquid pipes	Gas pipes
22 to 36 type	904	692	672	665	500	86	Ø6.35	Ø12.7
45 type	1,219	1,007	1,002	980	900	51		
56 type								
71 type							Ø9.52	Ø15.88

Remark for High Static Ducted Series



E2 type
High Static Ducted



E2 type
**Energy Saving
High-Fresh Air Ducted**



E1 type
High Static Ducted


Model	Operation	Rap valve kit CZ-P160RVK2 	3-way control PCB CZ-CAPE2 	3-way valve kit CZ-P160HR3 	3-way valve kit multiple connection port type 4 port CZ-P4160HR3 (160 type)  X 4pcs	Distribution Joint kit <2pipes> CZ-P160BK2 for 22.4kW unit or less CZ-P680BK2 for more than 22.4kW	Distribution Joint kit <3pipes> CZ-P224BH2 for 22.4kW unit CZ-P680BH2 for 28.0kW unit
E2 Type High Static Ducted	Cooling Only	-	-	-	-	-	-
	Cool or Heat	-	-	-	-	-	-
	Heat Recovery	-	2pcs	2pcs	use 2ports	1pc	1pc
E2 Type Energy Saving High-Fresh Air Ducted	Cooling Only	-	-	-	-	-	-
	Cool or Heat	2pcs	2pcs	-	-	2pcs	-
	Heat Recovery	-	2pcs	2pcs	use 2ports	1pc	1pc
E1 Type High Static Ducted (Only for S-224,S-280)	Cooling Only	-	-	-	-	-	-
	Cool or Heat	2pcs	-	-	-	2pcs	-
	Heat Recovery	-	-	2pcs	use 2ports	1pc	1pc



Panasonic Comfort Cloud

Control air conditioning units from wherever and whenever with your smartphone, by using Panasonic Comfort Cloud and WLAN smart adaptor.

This scalable solution is ideal for one system, one site or multiple locations. Coupling the adapter with the already feature rich systems, makes it an ideal solution for both residential and commercial applications.

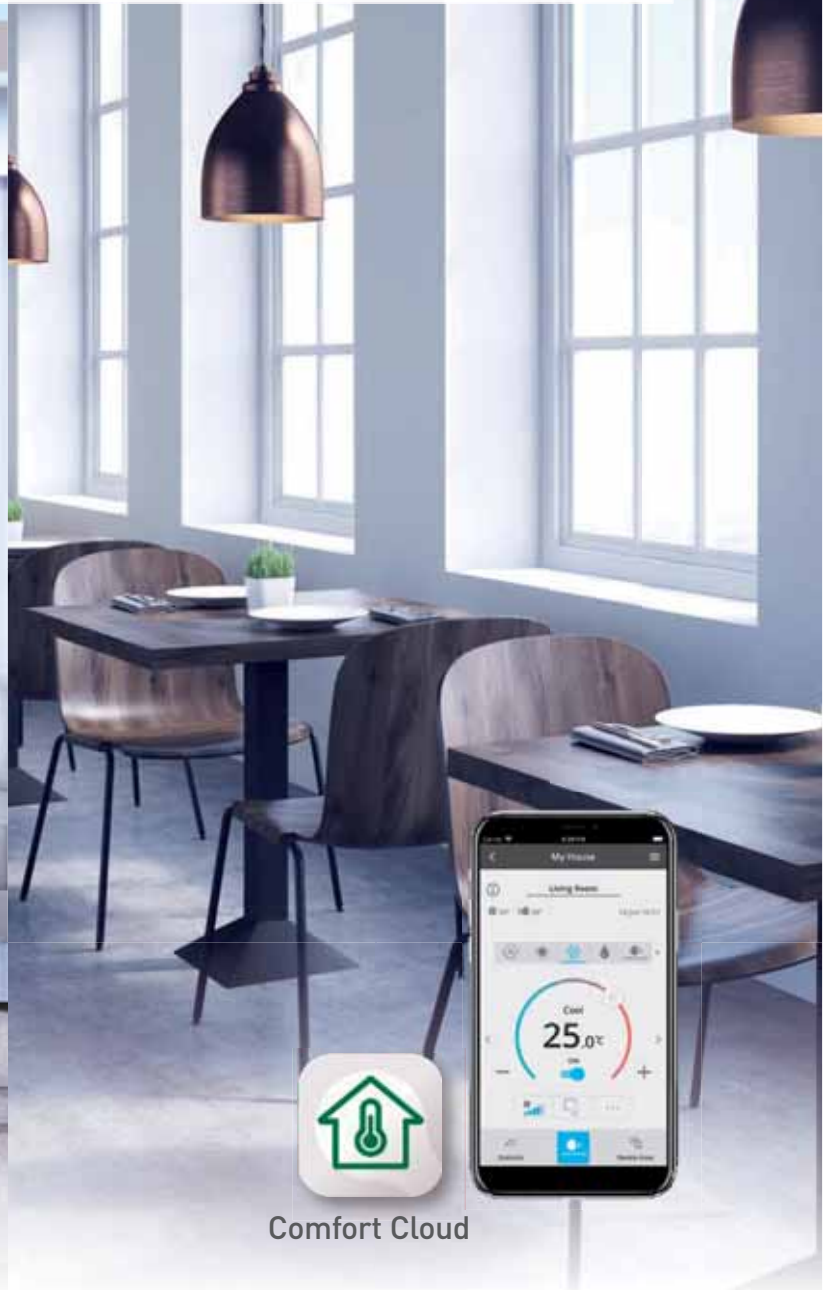

For Residential

Remotely manage and monitor air conditioning units from anywhere anytime.

For Light Commercial

Gain control of multiple zones and sites intuitively up to 200 indoor units.

Panasonic Comfort Cloud features

From 1 to 200 units

User can control up to 200 indoor units. 10 different sites, with up to 20 units / groups per site.

Connectable
up to **200 Units**
with just 1 device


Multiple User

The Panasonic Comfort Cloud App allows multiuser access control. Restrict user access to specific units.



Easy Scheduling

Complex weekly scheduling made simple. Not only for one units, but across multiple sites and from a smartphone.



Error Codes

Error code notification through the App, provides early notification and allows for faster repair.



Application examples



Centralised control from reception.



Multiple location control for small businesses.

System configuration

Network Adaptor

Connection Diagram

CZ-CAPWFC2

CZ-RTC6WBLW2



WLAN remote controller



Indoor Unit



Wireless LAN

In conformity with IEEE 802.11



Router



Panasonic Cloud Server

CZ-CAPWFC2:
Available for
all types of VRF

*Available for particular types of VRF indoor units.
Please consult with Panasonic sales engineers.

WLAN smart adaptor specification

CZ-CAPWFC2

Input Voltage	DC 12V (Supplied from the T10 connector of the indoor unit)
Power Consumption	Maximum 2.4W
Size [H x W x D]	120 x 70 x 25mm
Weight	190g (including communications lines)
Interface	Wireless LAN
Wireless LAN Standard	IEEE 802.11 b/g/n
Frequency range	2.4GHz band
Encryption	WPA2-PSK(TKIP/AES)
Operation range	0-55°C, 20 - 80RH%



Comfort Cloud App

Download on the
App Store

GET IT ON
Google Play



Scan QR code to download free
Panasonic Comfort Cloud App

Compatible Device and Browsers

1. IOS 9.0 or above 2. Android™ 4.4 or above

FSV Controllers

A wide variety of control options to meet the requirements of different applications.

Operation system	Individual control systems			
Requirements	Simplified operation	High-spec operation	Normal operation	Operation from anywhere in the room
External appearance				
Type, model name	Simplified high-spec Wired Remote Controller with Bluetooth	High-spec Wired Remote Controller	Timer Remote Controller (Wired)	Wireless Remote Controller
	CZ-RTC6W (Basic, white) CZ-RTC6 (Basic, black) *CZ-RTC6WBLW2 (with WiFi, white) *Available for particular types of VRF indoor units.	CZ-RTC5B	CZ-RTC4A	Controller: CZ-RWS3 Receiver: CZ-RWRU3 CZ-RWRL3 CZ-RWRD3 CZ-RWRT3 CZ-RWRC3
Built-in thermostat	●	●	●	—
nanoe™ X on/off control	●	●	—	●
ECONAVI ON/OFF control	●	●	●	●
Number of indoor units which can be controlled	1 group, 8 units	1 group, 8 units	1 group, 8 units	1 group, 8 units
Use limitations	・ CZ-RTC6(W) : Up to 2 controllers can be connected per group (only combination possible with CZ-RTC6(W)) ・ CZ-RTC6WBLW2 : Up to 1 controller can be connected per group.	・ Up to 2 controllers can be connected per group (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit)	・ Up to 2 controllers can be connected per group (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit)	・ Up to 2 controllers can be connected per group.
Function ON/OFF	●	●	●	●
Mode setting	●	●	●	●
Fan speed setting	●	●	●	●
Temperature setting	●	●	●	●
Air flow direction	●	●	●	●
Permit/Prohibit switching*	—	—	—	—
Weekly program	●	●	●	—

All specifications are subject to change without notice.
*CZ-RTC6WBLW2 with H&C Control App).

ECONAVI

ECONAVI Sensor

CZ-CENSC1



Utilises ECONAVI Sensor and Control Program technologies to detect where energy is normally wasted and self-adjusts cooling power to reduce energy waste.

- Activity detection
- Absence detection

Timer operation	Centralised control systems					
Daily and weekly program	Operation with various functions from a central location	Only ON/OFF operation from a central location	Simplified load distribution ratio (LDR) for each tenant	BMS System PC Base	Connection with 3rd Party Controller	
			10.4 in. touch screen panel color LCD			
				P-AIMS Software Up to 1024 units  CZ-CSWKC2	Seri-Para I/O unit for outdoor unit  CZ-CAPDC2	
Schedule Timer	System Controller	ON/OFF Controller	Intelligent Controller			
CZ-ESWC2	CZ-64ESMC3	CZ-ANC3	CZ-256ESMC3 (CZ-CFUNC2)			
—	—	—	—	Optional software  CZ-CSWAC2 for Load distribution CZ-CSWWC2 for Web application CZ-CSWGC2 for Object layout display CZ-CSWBC2 for BACnet software interface *PC required (field supply)	Interface Adaptor  CZ-CAPC3	
—	—	—	—		Seri-Para I/O unit for each indoor unit  CZ-CAPBC2	
—	●	—	●		Communication Adaptor  CZ-CFUNC2	
64 groups, max. 64 units	64 groups, max. 64 units	16 groups, max. 64 units	64 units x 16 systems, max. 256 units		LonWorks Interface  CZ-CLNC2	
- Required power supply from the system controller - When there is no system controller, connection is possible to the T10 terminal of an indoor unit.	- Up to 10 controllers, can be connected to one system. - Main unit/sub unit (1 main unit + 1 sub unit) connection is possible. - Use without remote controller is possible.	- Up to 8 controllers (4 main units + 4 sub units) can be connected to one system. - Use without remote controller is impossible.	A communication adaptor (CZ-CFUNC2) must be installed for three or more links.			
—	●	●	●			
—	●	—	●			
—	●	—	●			
—	●	—	●			
—	●	—	●			
—	●	●	●			
●	●	—	●			

Connectivity matrix.



White model ¹⁾	CZ-RTC6W	CZ-RTC6WBLW2
Black model	CZ-RTC6	
Wireless functions	No wireless capability	Bluetooth® + Wi-Fi
App compatibility		
Panasonic Comfort Cloud App	—	✓
Panasonic H&C Control App	—	—


Function comparison

		Remote controller functionalities		Panasonic Comfort Cloud App	
					
		CZ-RTC5B	CZ-RTC6W / CZ-RTC6	CZ-CAPWFC2 + app	CZ-RTC6WBLW2 + app
Basic operation	ON / OFF, mode, temperature, air flow volume, air flow direction	✓	✓	✓	✓
	Time display	✓	—	✓	✓
Timer functions	Easy ON / OFF timer	✓	—	—	—
	Weekly program timer	✓	—	✓	✓
	Outing function	✓	✓	—	—
Energy saving	Temperature auto return	✓	—	—	—
	Temperature setting range limitation	✓	—	✓	✓
	OFF reminder	✓	—	—	—
	Energy saving mode	✓	—	—	—
	Schedule demand control	✓	—	—	—
	Energy monitoring	✓	—	✓	✓
	Econavi	✓	✓	✓	✓
	System failure information (alarm history)	✓	✓	—	—
Maintenance	Alarm display	✓	✓	✓	✓
	Service contact registration	✓	—	—	—
	Filter sign	✓	✓	—	—
	Test run	✓	✓	—	—
	Sensor value monitor	✓	✓	—	—
	Simple setting mode	✓	✓	—	—
	Detailed setting mode	✓	✓	—	—
	Key lock	✓	✓	—	—
Others	Ventilation fan control	✓	—	—	—
	Display contrast adjustment	✓	✓	—	—
	Rotation	✓	—	—	—
	Quiet operation mode	✓	—	—	—
	nanoe™ X	✓	✓	✓	✓

Individual Control Systems

Control contents	Part name, model No.	Quantity
Standard Control - Control of the various operations of the indoor unit by wired or wireless remote controller. - Cooling or heating mode of the outdoor unit is decided by the first priority of the remote controller. - Switching between remote controller sensor and body sensor is possible.	Wired remote controller CZ-RTC4,CZ-RTC5B,CZ-RTC6 Wireless remote controller + Receiver CZ-RWS3 (Wall Mounted/ Mini Cassette) CZ-RWS3 + CZ-RWRL3 (4-WAY Cassette) CZ-RWS3 + CZ-RWRL3 (2-WAY Cassette) CZ-RWS3 + CZ-RWRD3 (1-WAY Cassette) CZ-RWS3 + CZ-RWRT3 (Ceiling Mounted) CZ-RWS3 + CZ-RWRC3 (All split type)	1 unit each
(1) Group control - Batch remote control on all indoor units. - Operation of all indoor units in the same mode. - Up to 8 units can be connected. - The sensor is the body sensor, and thermostat ON/OFF setting in regard to the temperature set by the remote controller is possible for each indoor unit.	Wired remote controller CZ-RTC4,CZ-RTC5B,CZ-RTC6 Wireless remote controller + Receiver CZ-RWS3 (Wall Mounted/ Mini Cassette) CZ-RWS3 + CZ-RWRL3 (4-WAY Cassette) CZ-RWS3 + CZ-RWRL3 (2-WAY Cassette) CZ-RWS3 + CZ-RWRD3 (1-WAY Cassette) CZ-RWS3 + CZ-RWRT3 (Ceiling Mounted) CZ-RWS3 + CZ-RWRC3 (All split type)	1 unit
(2) Main/sub remote control - Max 2 remote controllers per indoor unit. (Main remote controller can be connected) - The button pressed last has priority. - Timer setting is possible even with the sub remote controller. (When using ECONAVI sensor, only one remote controller is possible to connect at indoor unit)	Wired remote controller CZ-RTC4,CZ-RTC5B,CZ-RTC6 Wireless remote controller + Receiver CZ-RWS3 (Wall Mounted/ Mini Cassette) CZ-RWS3 + CZ-RWRL3 (4-WAY Cassette) CZ-RWS3 + CZ-RWRL3 (2-WAY Cassette) CZ-RWS3 + CZ-RWRD3 (1-WAY Cassette) CZ-RWS3 + CZ-RWRT3 (Ceiling Mounted) CZ-RWS3 + CZ-RWRC3 (All split type)	As required

SYSTEM EXAMPLE FSV

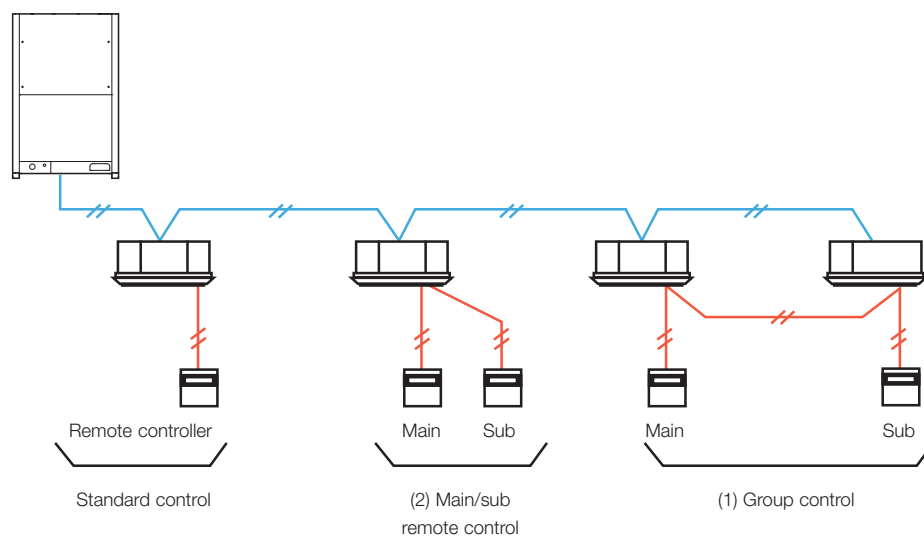

NOTE: Connectable number of controllers, controller combination, connectable indoor units, remote control maximum wiring length are different between the controller. Please confirm the installation Instructions of controller or consult with Panasonic service center.

Timer remote controller (CZ-RTC4A)



Dimensions
H 120 x W 120 x D 20 mm

Basic remote controller ON/OFF

- Operation mode changeover (Cooling, Heating, Dry, Auto, Fan).
- Temperature setting (Cooling/Dry: 18-30 deg Heating: 16-30 deg).
- Fan speed setting H/ M/ L and Auto.
- Air flow direction adjustment.
- ECONAVI on/ off*

Time Function 24 hours real time clock

- Day of the week indicator.

Weekly Programme Function

- A maximum of 6 settings/day and 42 settings/week can be programmed.

Outing Function

- This function can prevent the room temperature from dropping or rising when the occupants are out for a long time.

Sleeping Function

- This function controls the room temperature for comfortable sleeping.

Max. 8 indoor units can be controlled from one remote controller

Remote control by main remote controller and sub controller is possible

Max. 2 remote controllers (main remote controller and sub controller) can be installed for one indoor unit.

* Depending on the model, some menus cannot be used.

Wireless remote controller



2-WAY Cassette
CZ-RWS3 +
CZ-RWRL3



4-Way Cassette
CZ-RWS3 +
CZ-RWRU3



Ceiling Mounted
CZ-RWS3 +
CZ-RWRT3



1-WAY Cassette
CZ-RWS3 +
CZ-RWRD3



For all indoor units
CZ-RWS3 +
CZ-RWRC3



Wall /
Mini Cassette
CZ-RWS3

Remote control by main remote controller and sub controller is possible

- Max. 2 remote controllers (main remote controller and sub controller) can be installed for one indoor unit.

When CZ-RWS3 is used, wireless control becomes possible for all indoor units

- When a separate receiver is set up in a different room, control from that room also becomes possible.
- Automatic operation by means of the emergency operation button is possible even when the remote controller has been lost or the batteries have been exhausted.

In addition, there are other functions such as temperature setting, operation switching, airflow direction/fan speed setting, etc

Ventilation independent operation is possible

When commercial ventilation fans or heat-exchange ventilation fans have been installed, they can be operated with this remote control (interlocked operation with the indoor unit or independent ventilation ON/OFF).

Timer Operation

Schedule timer (CZ-ESWC2)



Dimensions
H 120 x W 120 x D 16 mm

- A function for pausing the timer in case of national holidays has been added, and timer operation also can be stopped for a long time

- By setting holidays or operation stop within one week, the timer can be paused just for that week.
- All timer settings can be stopped with the timer "ON/OFF effective" button. (Return to timer operation is made by pressing the button again.)

Up to 64 groups (max 64 indoor units) can be controlled divided into 8 timer groups

- Six program operations (Operation/Stop/ Local permission/ Local prohibition) per day can be set in a program for one week

- Only operation or stop, remote controller local permission or remote controller local prohibition, and their respective combinations are possible. (Operation + local permission, stop + local prohibition, only local permission, etc.)
- Local prohibition and the combination of the three items of temperature setting, mode change, and operation/stop can be set at the time of installation.


The power supply for the schedule timer is taken from one of the following.

1. Control circuit board (T10) of a nearby indoor unit (power supply wiring length: within 200m from the indoor unit).
2. System controller (power supply wiring length: within 100 m from the indoor unit).


When the power supply for the schedule timer is taken from the control circuit board of the indoor unit, that indoor unit cannot be used with other control devices using the T10 terminal.

As operation mode and temperature settings are not possible with the schedule timer, it must be used together with a remote controller, a system controller, an intelligent controller, etc. Also, as it does not have an address setting function, the control function of a system controller etc. must be used for address setting.

Connection example 1 (POWER SUPPLY FROM THE INDOOR UNIT)

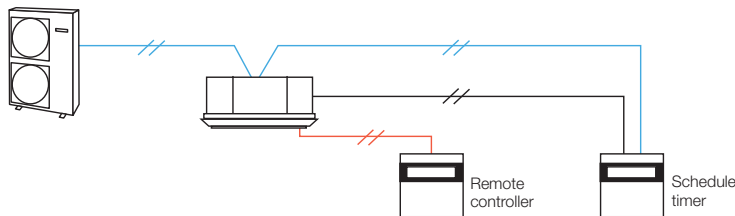


Connection example 2 (POWER SUPPLY FROM THE SYSTEM CONTROLLER AND ON/OFF CONTROLLER)

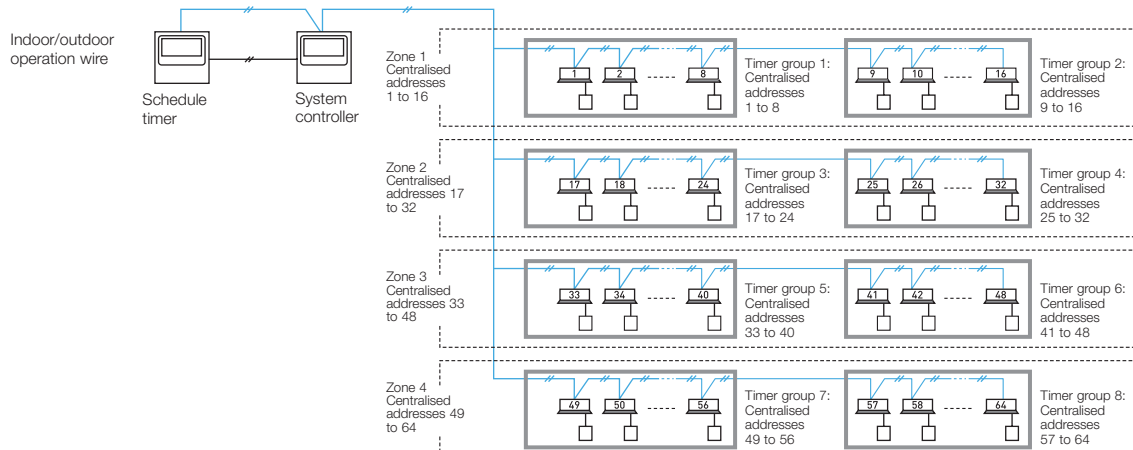

Centralised Control Systems

System controller (CZ-64ESMC3)

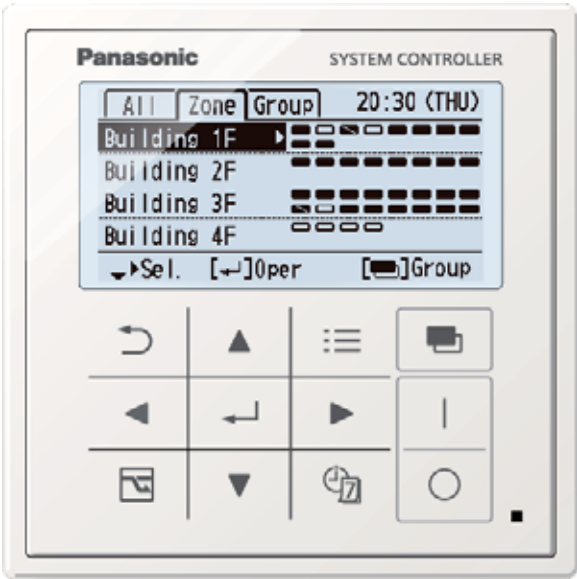

Dimensions
H 120 x W 120 x D 16 + 52
(embedding dimension mm)

Power supply: AC 100 to 240 V
I/O part:
Remote input part (effective voltage:DC24V) All operation,All stop,Demand 1,Demand 2
Remote output part (non voltage contact) Operation, Alarm (external power supply within DC 30V, max 0.5A)
Total wiring length : 1 km

Individual control is possible for max 64 groups, 64 indoor units.

- Control of 64 indoor units divided into 4 zones. (One zone can have up to 16 groups, and one group can have up to 8 units.)
- Control is possible for ON/OFF, operation mode, fan speed, air flow direction, operation monitoring, alarm monitoring, ventilation, remote controller local operation prohibition, etc.

Prohibition setting for Remote controller operation

Setting mode	ON/OFF	Mode	Temperature	Fan speed	Flap
Permit	●	●	●	●	●
Prohibit 1	—	●	●	●	●
Prohibit 2	—	—	—	●	●
Prohibit 3	●	—	—	●	●
Prohibit 4	●	—	●	●	●

In case of joint use with a wireless remote controller, there are limitations for the control mode. Please use only with setting "Permit" and "Prohibit1 (prohibition for ON/OFF)".

*Contents for Prohibit 1~4 can be modified.


● : Operation from the remote controller is possible.
— : Operation from the remote controller is prohibited.

- **Joint use with a remote controller, an intelligent controller, etc. is possible**
(The maximum number of connectable system controllers is 10, including other central controllers on the same circuit.)
(In case of joint use with a wireless remote controller, there are limitations for the control mode. Please use only with setting "Permit" and "Prohibit1 (prohibition for ON/OFF)".)
- **Control of systems without a remote controller and of main/sub systems (a total of up to 2 units) is possible**
- **Weekly timer function**
 - 8 programs per day (with ON/OFF/Mode/Temperature/Central control setting items) for 1week (7days) can be set.
 - Special holiday setting can ignore the timer operation temporary by keeping original timer setting. (Special holiday setting can be removed by same setting display.)
- **5 types of Energy saving function**
Set temperature automatic return / Set temperature range limitation / Off remind / Off timer operation / Demand control timer


• A control mode corresponding to the use condition can be selected from 10 patterns

A : Operation mode: Central control mode or remote control mode can be selected
Central control mode: The system controller is used as centralised control device. (Setting from a remote controller can be prohibited by prohibiting local operation from the system controller.)
Remote control mode: The system controller is used as a remote controller. (Setting from the system controller can be prohibited by prohibiting local operation from another central control unit.)
B : Controlled unit number mode: All mode or zone 1, 2, 3, 4 mode can be selected
All mode: All, zone, or group unit can be selected.
Zone 1, 2, 3, 4 mode: Setting is possible only for the indoor units of zone 1, 2, 3, or 4.

Connection example			
		A Operation mode	
		Central control mode	Remote control mode
B Controlled unit number mode	All mode	All central control Example 1	All remote control
	Zone 1 mode	Zone 1 central control Example 2	Zone 1 remote control
	Zone 2 mode	Zone 2 central control	Zone 2 remote control Example 3
	Zone 3 mode	Zone 3 central control Example 4	Zone 3 remote control
	Zone 4 mode	Zone 4 central control	Zone 4 remote control Example 5

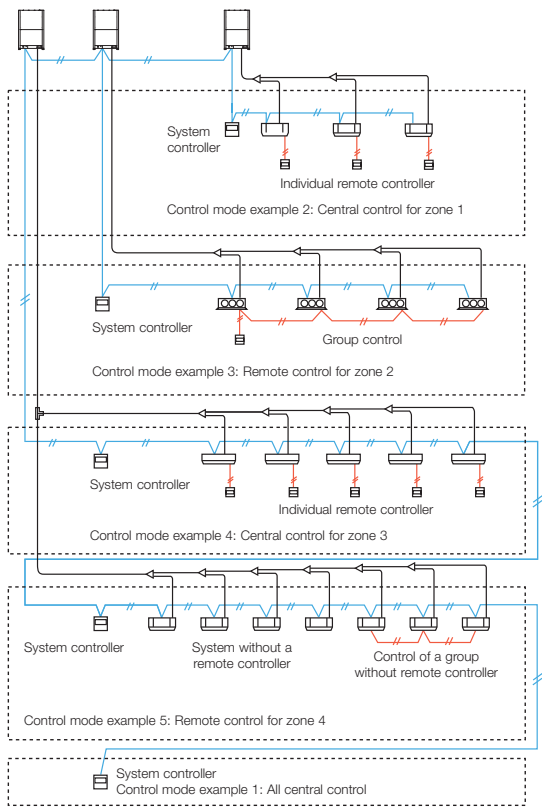

ON/OFF controller (CZ-ANC3)



Dimensions
H 121 x W 122 x D 14 + 52
(embedding dimension mm)

Power supply: AC 100 to 240 V
I/O part:
Remote input (effective
voltage: within DC 24 V): All ON/OFF
Remote output (allowable
voltage: within DC 30 V): All ON, All alarm

- 16 groups of indoor units can be controlled.
- Collective control and individual group (unit) control can also be performed.
- Up to 8 ON/OFF controller (4 main, 4 sub) can be installed in one link system.
- The operation status can be determined immediately.

Intelligent controller (CZ-256ESMC3)



Touch panel

Dimensions
H 240 x W 280 x D 85 mm
Power supply AC 100 to 240 V (50/60 Hz)
LCD: 10.4 in. TFT, XGA(1024 x 768), LED backlight

Product Features

- **10.4 in., Large, easy-to-use color LCD**
 - With smartphone like operations, such as swiping and flicking
- **Enhanced energy-saving control functions**
 - Packed with demand functions
 - Set temperature auto return settings, Auto shutoff, Set temperature range limit settings
- **Energy Visualization**
 - Displays electricity & gas usage distribution
 - Supports energy-saving plans with graph display function

New Features

- **Max 256 indoor unit [4 links x 64 units] can be controlled. In case of three or more systems [more than 128 units], a communication adaptor CZ-CFUNC2 must be installed for three or more links.**
- **Operation is possible as batch, in zone units, and in group units.**
- **ON/OFF, operation mode setting, temperature setting, for fan speed setting, air flow direction setting (when used without a remote controller) and remote controller local operation prohibition [prohibition 1,2,3,4] can be done**
- **Graph display [trends, comparisons]**
- **ECONAVI ON/OFF**

- **Outdoor unit quiet operation ON/OFF**
- **Energy-saving Functions**
- **Event control [such as equipment linkage]**
- **Limitation contents for prohibited operation**

Prohibition means limitation of the operation contents from the remote controller. It is also possible to change the prohibition items.

Limitation contents (Limitations can be user defined)

Individual	There is no limitation for the operation of the remote controller. However, the contents will be changed to the contents of the controller operated last. (Last-pressed priority.)
Prohibition 1	The remote controller cannot be used for ON/OFF. (All other operations are possible from the remote controller.)
Prohibition 2	The remote controller cannot be used for ON/OFF, operation mode change and temperature setting. (All other operations are possible from the remote controller.)
Prohibition 3	The remote controller cannot be used for operation mode change and temperature setting. (All other operations are possible from the remote controller.)
Prohibition 4	The remote controller cannot be used for operation mode change. (All other operations are possible from the remote controller.)

Remote Control


The LAN terminal on this unit enables you to connect it to a network. Connecting to internet will enable you to operate the unit and check the status using a PC from remote location.



Display image on the remote PC is same design as the controller unit.

System configuration

The following is an example of a system configuration.

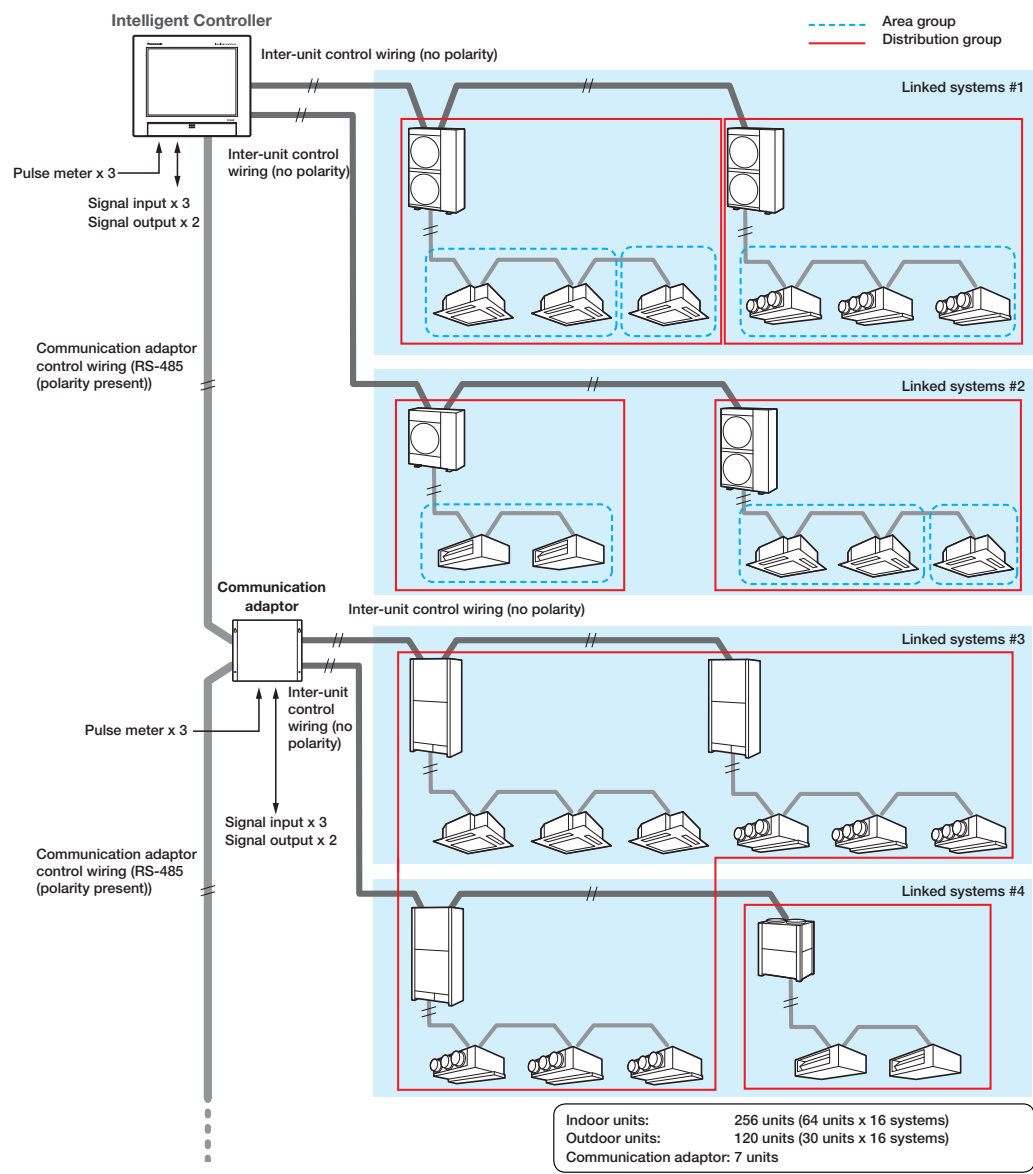

Communication adaptor (CZ-CFUNC2)



* Required when more than 129 indoor units are connected.



Panasonic total air conditioning management system P-AIMS

P-AIMS Basic software / CZ-CSWKC2

Up to 1024 indoor units can be controlled by one PC

Functions of basic software

- Standard remote control for all indoor units
- Many timer schedule programs can be set on the calendar
- Detailed information display for alarms
- CSV file output with alarm history, operating status.
- Automatic data backup to HDD




With 4 upgrade packages the basic software can be upgraded to suit individual requirements



CZ-CFUNC2



The P-AIMS is ideal for large areas/buildings such as shopping centers, universities and office buildings. Each line can have max.8C/A units, and control max.512 units. In total, 1024 indoor units can be controlled by 1 "P-AIMS" PC.

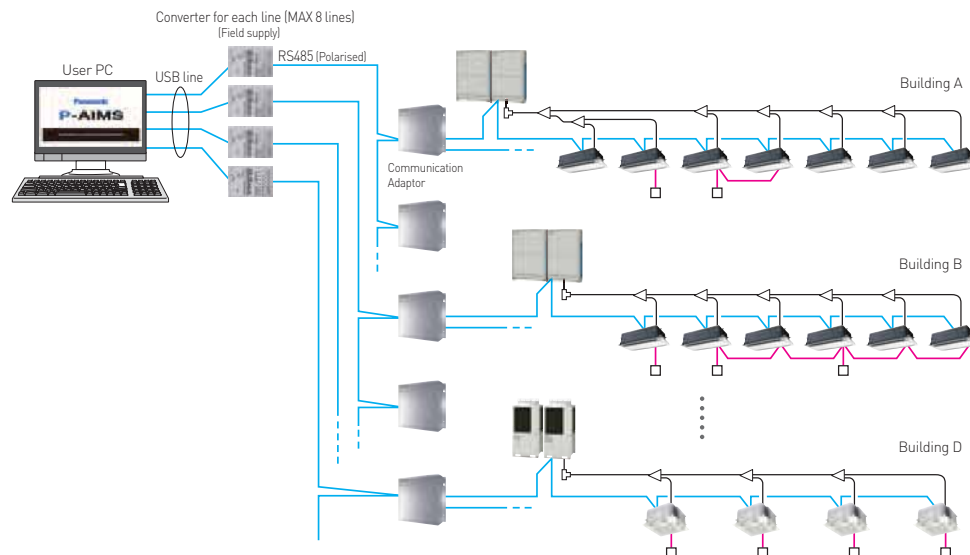


Recommended computer specs (Desktop type)

Operating system	Windows 10 Pro 64bit
CPU	Intel Core™ i5-6500 3.20GHz or higher (Recommended computer) Intel Core™ i7-7700 3.60GHz or higher (When installing Layout Display Software or using 512 or more indoor units)
Memory	8GB or larger
HDD	SSD (Solid State Drive) 250GB or larger
Monitor	1920 × 1080 (full HD) Recommended (1280 × 1024 (SXGA) minimum)
(Built-in speaker)	1920 × 1080 (full HD) Required (when installing Layout Display Software)
External HDD	500GB or larger (An external power supply type is preferable because the HDD will be used for backing up data.)
LAN	Network adaptor equipped machine (when Web Software or BACnet Communication Software installed)
UPS (Field Supply)	Select a UPS with a sine output wave form

P-AIMS optional software CZ-CSWAC2 for Load distribution

Load distribution calculation for each tenant

- Air-conditioner load distribution ratio is calculated for each unit (tenant) with used energy consumption data (m3, kWh).
- Calculated data is stored with CSV type file.
- Data of last 365 days is stored

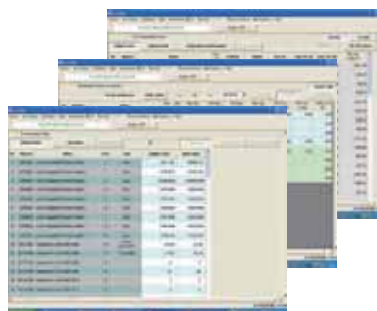

P-AIMS optional software CZ-CSWWC2 for Web application

Web access & control from remote station

- Accessing P-AIMS software from remote PC.
- You can monitor/operate FSV systems by using Web browser (Internet Explorer).



P-AIMS optional software CZ-CSWGC2 for Object layout display

Whole system can be controlled visually


- Operating status monitor is available on the layout display.
- Object's layout and indoor unit's location can be checked at once.
- Each unit can be controlled by virtual remote controller on the display.
- Max 4 layout screens are shown at once.



P-AIMS optional software CZ-CSWBC2 for BACnet software interface

Connectable to BMS system

- Can communicate with other equipment by BACnet protocol.
- FSV systems can be controlled by both BMS and P-AIMS.
- Max 255 indoor units can be connected to 1 PC (that has P-AIMS basic & BACnet software).

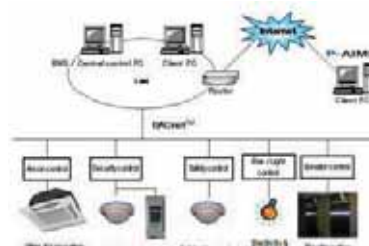


T10 Terminal for External Control (Digital Connection)

Connecting an FSV indoor unit to an external device is easy. The T10 Terminal featured in the electronic circuit board of all indoor units enables digital connection to external devices.




1. T10 Terminal Specification (T10:CN061 at indoor unit PCB)

- **Control items:** 1. Start/stop input (eg hotel key card, push button operation)
2. Remote controller prohibit input
3. Operation status output (eg fresh air fan)
4. Fault status output

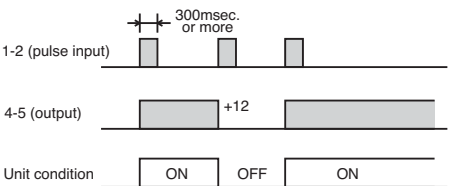

NOTE: The wire length from indoor unit to the Relay must be within 2.0m.
Pulse signal changeable to static with JP cutting. (Refer to JP001)

• Example of wiring



Condition

1. 1-2 (Pulse input): Unit ON/OFF condition switching with a pulse signal. (1 pulse signal: shortage status more than 300msec.or more)
2. 2-3 (Static input): Open/ Operation with Remote is permitted.(Normal condition) Close/ Remote controller is prohibited.
3. 4-5 (Static output): 12V output during the unit ON. / No output at OFF.
4. 5-6 (Static output): 12V output when some errors occur / No output at normal.


2. Usage Example

Forced OFF control

• Condition

1-2 (Static input): Close/ Operation with Remote is permitted. (Normal condition) Open/ Unit is forcibly OFF and Remote controller operation is prohibited.

• Example of wiring

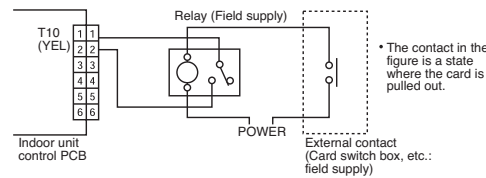


NOTE: The wire length from indoor unit to the Relay must be within 2.0m

Operation ON/OFF signal output

• Condition

4-5 (Static output): 12V output during the unit ON / No output at OFF

• Example of wiring

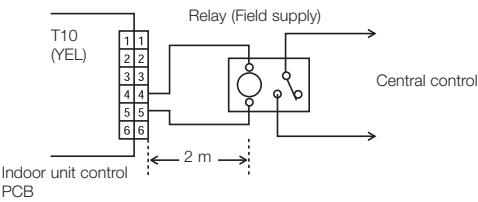


NOTE: The wire length from indoor unit to the Relay must be within 2.0m
Pulse signal changeable to static with JP cutting. (Refer to JP001)

Interfaces for External Control (Digital Connection)

Seri-Para I/O unit for each indoor unit (CZ-CAPBC2)



System example

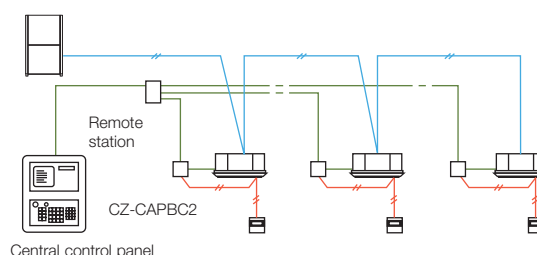


- Control and status monitoring is possible for individual indoor unit (1 group).
- In addition to operation and stop, there is a digital input function for air speed and operation mode.
- Temperature setting and measuring of the indoor suction temperature can be performed from central monitoring.
- The analog input for temperature setting is 0 to 10 V, or 0 to 140 Ohm.
- Power is supplied from the T10 terminal of the indoor units.
- Separate power supply also is possible (in case of suction temperature measuring).

Interface adaptor (CZ-CAPC3)



System example

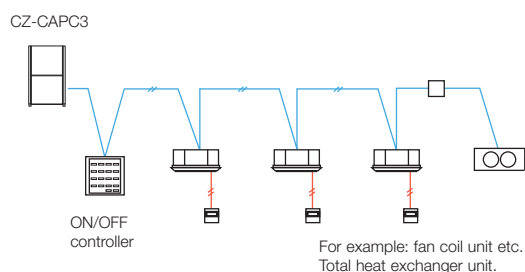


- Control and status monitoring is possible for individual indoor unit (or any external electrical device up to 250 V AC, 10 A) by contact signal.

Seri-Para I/O unit for outdoor unit (CZ-CAPDC2)



System example

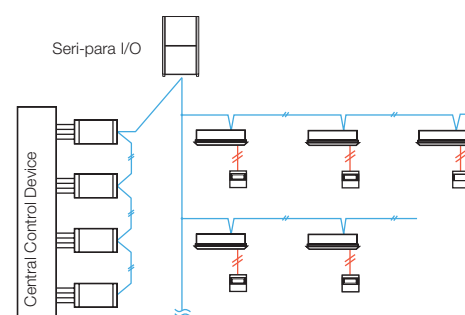


Dimensions	H 80 x W 290 x D 260 mm
Power supply	Single phase 110-120/220-240 V (50/60 Hz), 18 W
Input	Batch operation/Batch stop (non-voltage contact/DC 24 V, pulse signal). Cooling/Heating (non-voltage contact/static signal). Demand 1/2 (non-voltage contact/static signal) (Local stop by switching)
Output	Operation output (non-voltage contact). Alarm output (non-voltage contact)
Wiring length	Indoor/Outdoor operation lines: Total length 1 km. Digital signal: 100 m or shorter

- This unit can control up to 4 outdoor units.
- From the centre control device, mode changing and batch operation/batch stop are possible.
- Required for demand control.

Serial Interface for 3rd Party External Controller

Example of 3rd party BMS connection with CZ-CFUNC2
(For the detail please consult to authorized dealer)

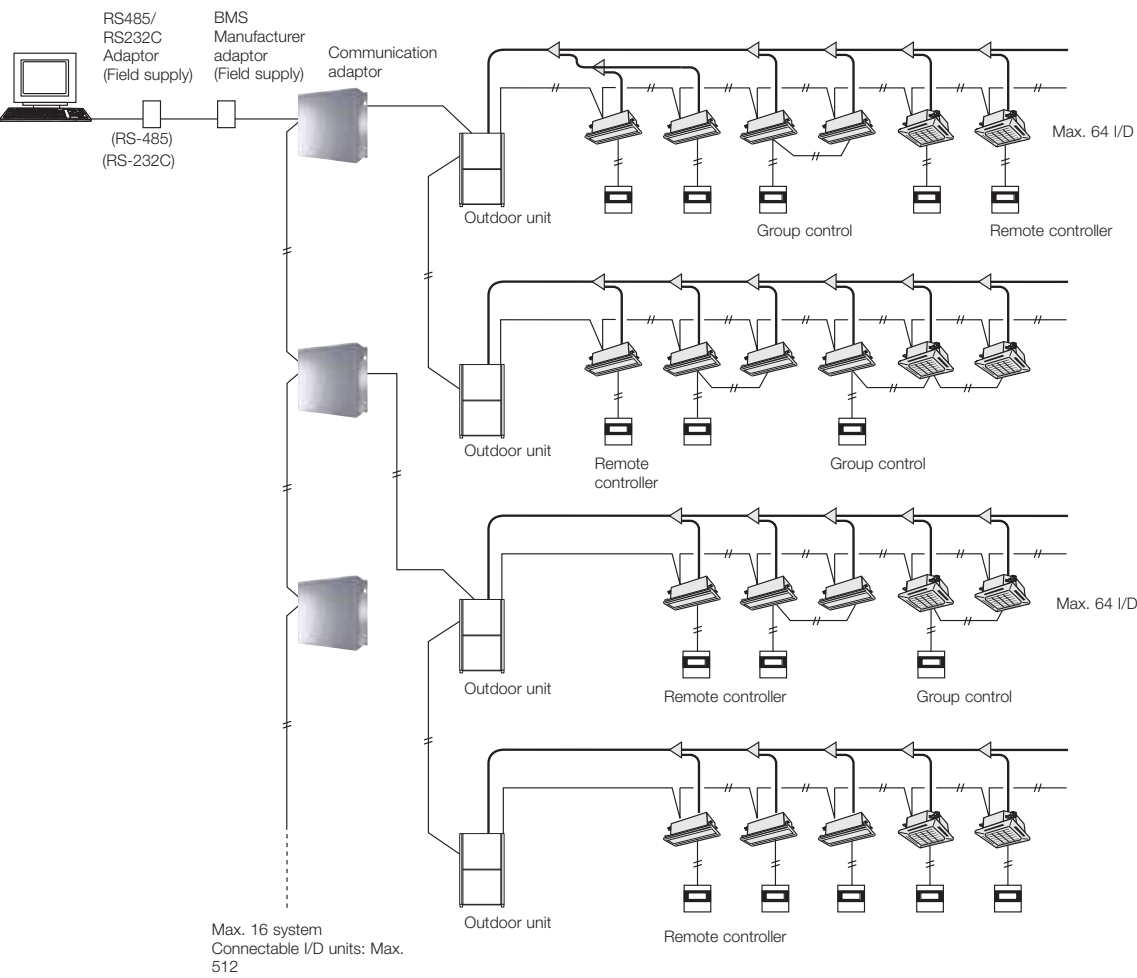

Functions via communication adaptor [CZ-CFUNC2]	
A/C unit settings	Unit ON/OFF
	Mode-change
	Room temperature setting
	Fan speed setting
	Flap setting
	Central control setting
	Filter-sign clear
	Alarm reset
A/C unit status	Unit ON/OFF status
	Operation mode
	Setting temperature
	Fan speed status
	Flap status
	Central control setting
	Filter-sign situation
	Correct/incorrect status
	Alarm code

Communication Adaptor (CZ-CFUNC2)



Up to 128 indoor units can be connected to one Communication Adaptor.


Serial Interface for LonWorks Network

LonWorks Interface (CZ-CLNC2)



- This interface is a communications converter for connecting LonWorks to the control network of FSV.
- From the host connected to LonWorks, basic settings and status monitoring is possible for up to 16 groups of indoor units.

System example

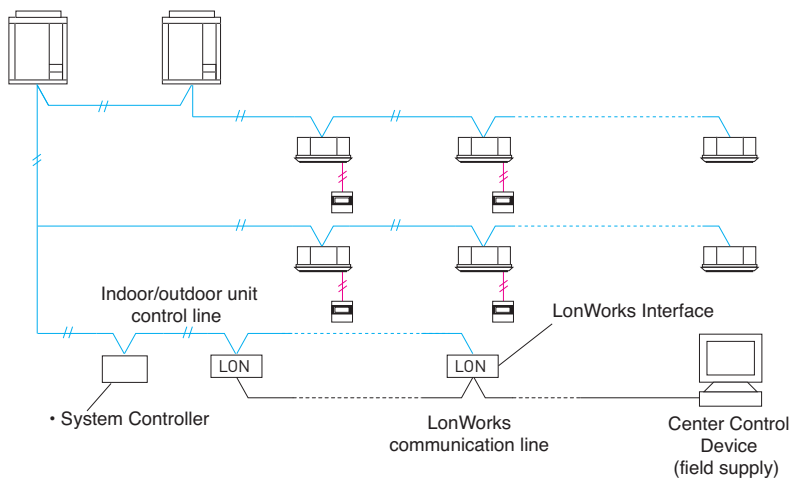


Functions


A/C unit settings from the LonWorks communicator	Settings for each group of indoor units	Start/stop
		Temp. setting
		Operation mode
		Option 1 settings
		Option 2 settings
A/C unit status notifications made to the LonWorks communicator	Settings for all units	Emergency stop
		Start/stop
		Temp setting
		Operation mode
		Option 1 settings
		Option 2 settings
		Alarm status
		Indoor units with active alarms
Configuration properties		Room temp.
		A/C unit status
		Transmission intervals settings
		Minimum time secured for transmission

FSV Controller External Dimensions


SIMPLIFIED WIRED REMOTE CONTROLLER
(CZ-RTC6WBLW2/CZ-RTC6W/CZ-RTC6)

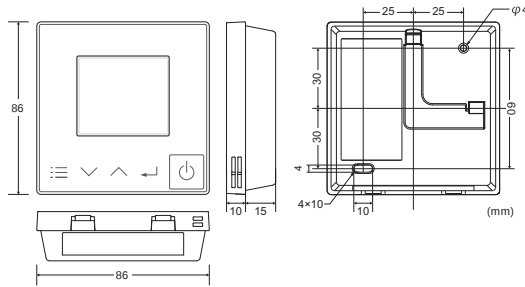

HIGH-SPEC WIRED REMOTE CONTROLLER
(CZ-RTC5B)




TIMER REMOTE CONTROLLER
(CZ-RTC4A)

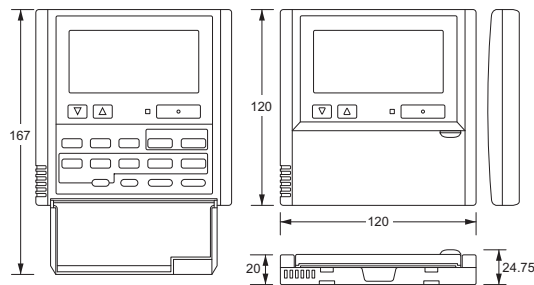


WIRELESS REMOTE CONTROLLER
(CZ-RWS3)




SEPARATE RECEIVER FOR
WIRELESS REMOTE
CONTROLLER
(CZ-RWSC3)

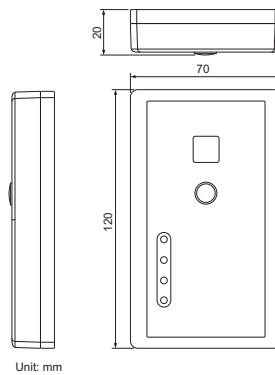


SYSTEM CONTROLLER
(CZ-64ESMC3)

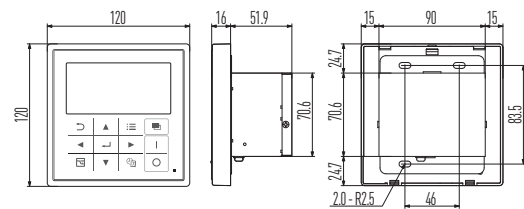


ECONAVI SENSOR
(CZ-CENSC1)


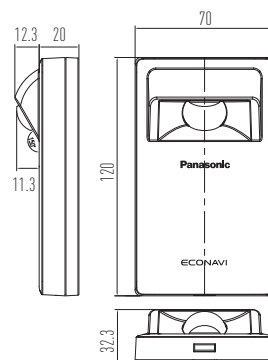


REMOTE SENSOR
(CZ-CSRC3)


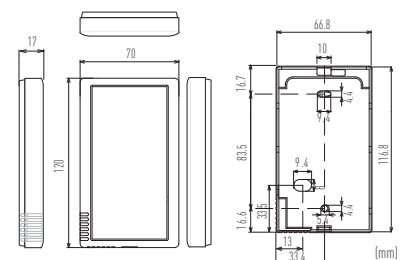


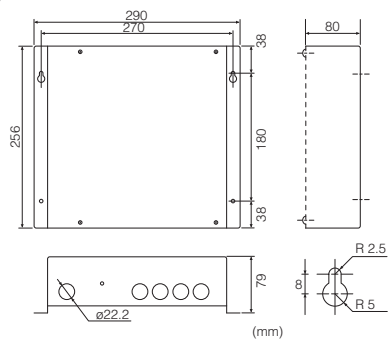COMMUNICATION ADAPTOR
(CZ-CFUNC2)



INTELLIGENT CONTROLLER
(CZ-256ESMC3)

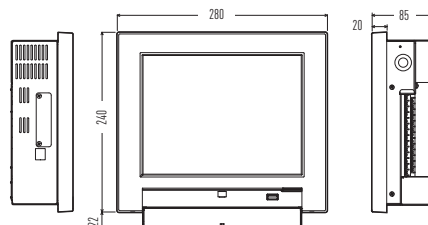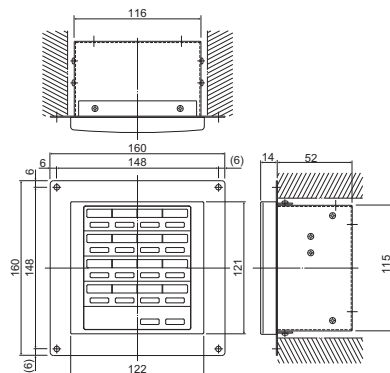ON/OFF CONTROLLER
(CZ-ANC3)

SERI-PARA I/O UNIT FOR EACH INDOOR UNIT
(CZ-CAPBC2)

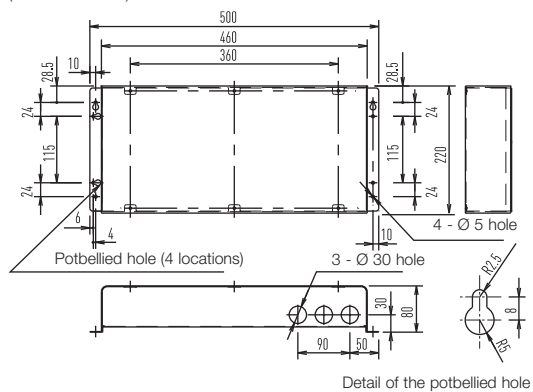LONWORKS INTERFACE
(CZ-CLNC2)

SERI-PARA I/O UNIT FOR OUTDOOR UNIT
(CZ-CAPDC2)

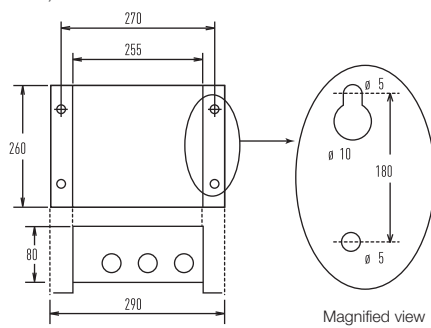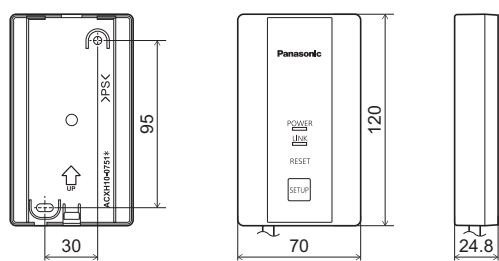WLAN ADAPTOR
(CZ-CAPWFC2)

VRF Renewal

An important drive to further reduce the potential damage to our ozone



R22 is a HCFC and classified as an ozone depleting substance banned under the Montreal Protocol. Many existing R22 VRF Systems will need to be replaced over the coming years by more modern and efficient R410A VRF Systems.

Panasonic takes proactive action to switch to R410A refrigerant

Recognising consumers' anxiety and financial difficulties to adapt to the new R22 regulations, Panasonic developed a new cost-effective and simple solution to switch to R410A refrigerant.

What is Panasonic VRF Renewal?

Panasonic VRF Renewal enables reuse of good quality existing R22 pipe work to be installed with a new high efficiency R410A system.

What's so unique about Panasonic's solution?

By enabling reuse of existing R22 piping, consumers get to save substantially from reduced installation cost, and without any sacrifices to warranty or performance.

Ozone Depletion Potential		
R22	HCFCs	0.055
R410A	HFC	0
R407C	HFC	0

R22 - The reduction of Chlorine critical for a cleaner future

Before renewing piping, be sure to contact an authorised Panasonic dealer for advice.

VRF Renewal

Panasonic's Renewal system allows a completely new VRF system, indoor and outdoor units, to be installed using the existing systems pipe work. Panasonic's advanced technology enables the system to work with previously installed pipe work by managing the working pressure within the system down to R22 (3.3 bar) levels. This ensures the system works safely and efficiently without loss of capacity.

The new equipment has potential to increase COP/EER by using state of the art inverter compressor and heat exchanger technology.

Having contacted your Panasonic supplier regarding pipe work restrictions and gained approval to use the Panasonic Renewal System there are three main tests that have to be carried out to ensure that the system can be used effectively.

Firstly a thorough inspection of the pipe work must be carried out and any damage must be repaired.


Secondly an oil test has to be carried out to ensure that the system has not been subject to a compressor burnout during its lifetime.

Lastly a VRF Renewal Kit (CZ-SLK2) has to be installed within the pipe work to ensure that the system is cleaned of any oil residue.



VRF Renewal Kit (CZ-SLK2) and Sight Glass

The following shows an overview of the VRF Renewal Kit (CZ-SLK2) that is required when existing tubing is reused. If the exact tube length and tube size of the existing tubing are uncertain, attach a sight glass in accordance with the figure below. It will be used for checking the amount of additional refrigerant charge

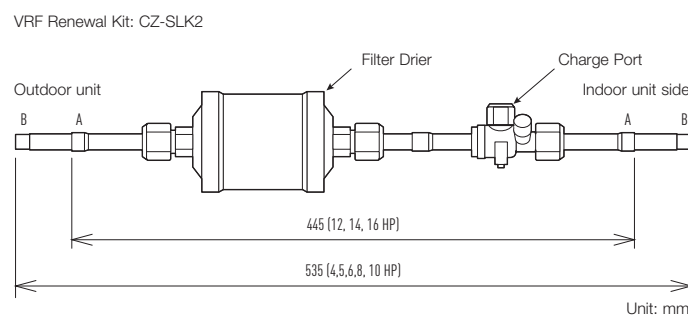

Attaching the Renewal Kit and sight glass

- To adjust the limited pressure level into 3.3 MPa, special setting is necessary on site.
- A filter drier shall be attached to the liquid tubing of each outdoor unit.
- Do not need to remove Renewal Kit after a test run is performed as it can be retained for normal operation.
- When attaching Renewal Kit, be extra careful with regards to installation location and orientation of the filter drier and ball valve. Any mistakes will complicate maintenance work.
- Thermal insulation material (field supply: heat resistance of 80°C or higher and thickness of 10 mm or greater) shall be applied to the Renewal Kit.
- The filter drier of the Renewal Kit may need to be replaced depending on the condition of the existing unit. Use a Danfoss DMB 164 as the replacement filter drier (field supply).

Connecting tube dimensions (Inch mm)


A Ø 1/2 (12.7) (12,14,16 HP)

B Ø 3/8 (9.52) (8,10 HP)


Note: If the tube size does not match that of the existing tubing, use a reducer (field supply) to adjust the tube diameter.

Sight glass (field supply)

If the exact tube length and tube size of the existing tubing are uncertain, attach a sight glass to the liquid tubing, and use it to check whether there is an appropriate amount of additional refrigerant charge.

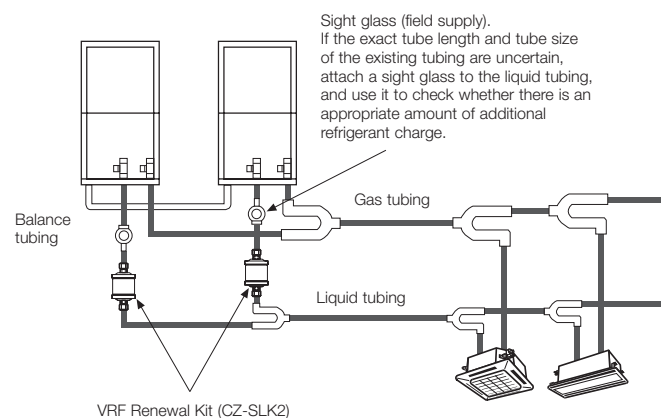

Procedure for VRF Renewal

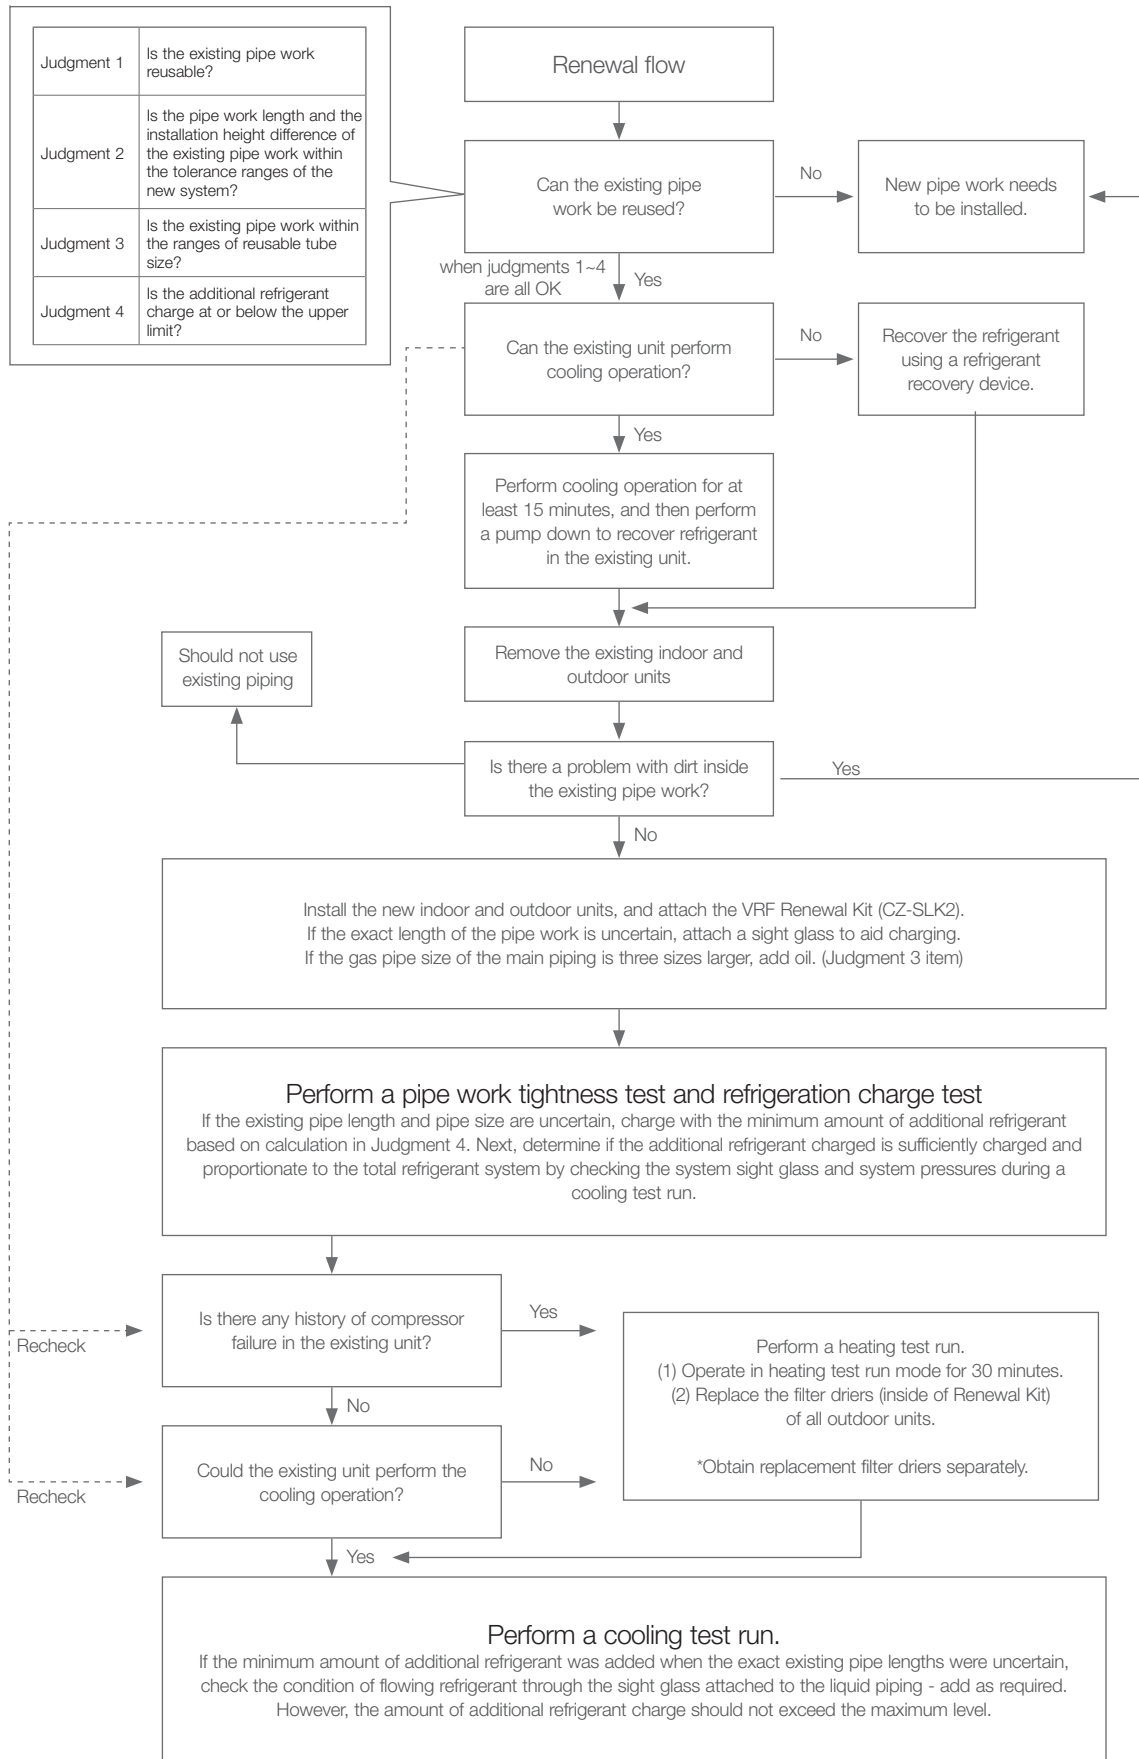



A Globally Trusted Air Conditioning Brand

With roots going back 60 years, the Panasonic Air Conditioning Business Division has grown to become a multinational company recognised around the world. Driven by a never-ending quest for product innovation, the group has evolved from manufacturing compressors to providing comprehensive air conditioning solutions. Panasonic has become a brand that people trust to deliver products with superior quality and reliability.

Panasonic's persistent innovation spurs the evolution of air conditioning solutions.



Starts production of absorption chillers

1971



1985

Introduces first GHP (gas heat pump) VRF air conditioner

1957

- Start of the Home Cooler business

1958

- Panasonic (using the National brand) introduces its first Home Cooler, a window-type air conditioner model
- Electrical Appliance Business Group (Kadoma) starts manufacture of Home Coolers
- Sales of Home Coolers begin



1961

- Starts exports of Home Coolers to South Vietnam

1965

- Launches Room Coolers



1968

- Begins development of rotary compressors
- The high efficiency and quality of these compressors draw interest from domestic and overseas air conditioner manufacturers
- External sales begin

1969

- Begins production at the Kusatsu Factory in Shiga Prefecture, Japan

1972

- MAICO, the Division's first overseas manufacturing base, established in Malaysia
- Begins operating twin-based system in Japan and Malaysia



1983

- Launches inverter air conditioners
- Starts sale of Panasonic's first inverter air conditioners
- Inverters grow to become a core technology in the air conditioner industry
- Starts shipment of air conditioners to Panasonic America



1985

- Begins development of scroll compressors

1990

- Launches world's first air conditioner equipped with compact scroll compressor

1993

- Establishes Matsushita-Wanbao (Guangzhou) Air Conditioner (MWAC)
- Establishes Matsushita-Wanbao (Guangzhou) Compressor (MWCC)
- Establishes Matsushita Air Conditioner Engineering (Matsushita ACE)


2003

- Launches automatic filter-cleaning function for air conditioners (AC robot)



- Debuts quiet, lightweight, compact EcoCute systems with improved energy-saving technology
- EcoCute adopts highly efficient, accumulator-less CO₂ scroll compressor
- CO₂ heat-pump hot water heater (Eco Cute) uses non-toxic, non-combustible natural refrigerant (CO₂) in place of freon, to reduce environmental impact
- Begins production of new energy-saving mini-VRF series multi-split packaged air conditioners for residential use



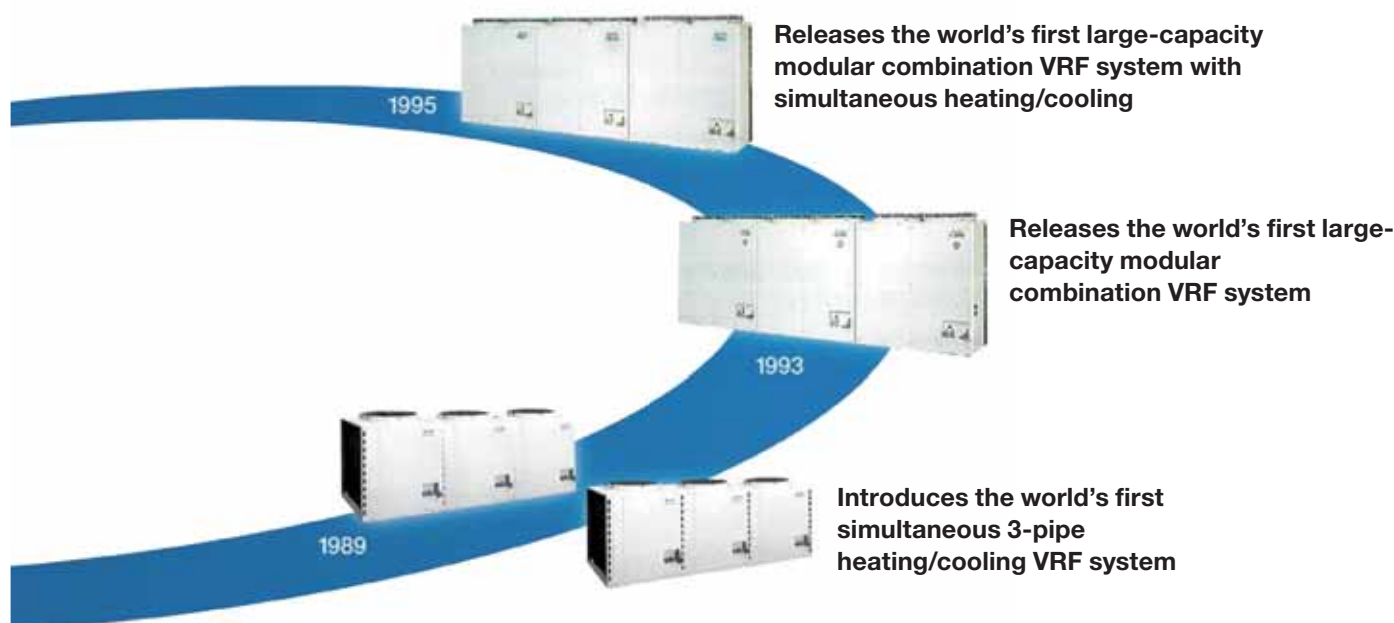

2005

- Panasonic products become extremely successful in Japan's air conditioner market as innovations such as airstream robots and motion sensors help grow Panasonic's market share

2006

- Cumulative global production of Panasonic compressors reaches 200 million units

2008

- Starts air-to-water heat pump business in Europe
- Hot water heating considered an eco-friendly alternative to conventional fuel-type heating systems
- At the Energy Conservation Grand Prize awards, Panasonic air conditioners wins the Energy Conservation Center of Japan (ECCJ) Chairman's Prize, whilst EcoCute wins the Agency of Natural Resources and Energy Director General's Prize (prizes presented by ECCJ)
- nanoe™ technology installed on room air conditioners



2009

- Establishes sales company in Europe (PHAAE) dedicated to selling air conditioners
- Panasonic HA Air-Conditioning Europe (PHAAE) strengthens company's commercial air conditioning business

2010

- Begins collaboration with SANYO air conditioner business
- Through share exchange, SANYO and Panasonic Electric Works become wholly owned subsidiaries

2012

- Launches FSV series of large-capacity VRF air conditioners
- New Panasonic Group inaugurated

2013

- Expands VRF operation in Malaysia



2015

- Air-Conditioner Company established

2016

- Partnership with Schneider Electric begins
- At the Energy Conservation Grand Prize awards, WX series room air conditioner wins the Ministry of Economic, Trade and Industry Prize for energy conservation



2017

- Celebrates 60th anniversary in air conditioning business
- Division completes its first acquisitions: A.M.P. Air Conditioning Ltd of the UK. and UNION RHAC TECNOLOGIA of Brazil

2018

- Establishes commercial air conditioner sales company in China (PAPAEON)

2019

- Name changes to Heating and Cooling Solutions Business Division
- Panasonic and Systemair announce development of integrated HVAC&R and ventilation solutions
- Panasonic and Welcome Air Tech's SAIVER announce development of connected air handling and VRF solution for Southeast Asia

2021

- R32 mini-VRF launches in Europe
- Heating & Ventilation A/C Company is established

2022

- nanoe™ X Generator Mark 3 (100 x) is introduced

Reliability and Durability

At Panasonic, we believe that the best air conditioner is one that works quietly and effectively in the background whilst minimising its impact on the environment. People who use our products can look forward to long years of high-quality performance without the need for constant maintenance.

As part of our rigorous design and development process, Panasonic air conditioners undergo a variety of stringent tests to ensure their effectiveness and long-term reliability. Tests for durability, waterproofing, shock resistance, and noise are conducted on component parts or on the finished products themselves.

As a result of all of these painstaking efforts, Panasonic air conditioners meet even the most demanding industrial standards and regulations in every country where they are sold.



Applying advanced technologies that truly make life better, we live by an unparalleled commitment to product quality. Our approach to product development originates in the DNA of Japanese craftsmanship.

Panasonic is building on the Japanese tradition of uncompromising quality control worldwide, developing and manufacturing fine products and delivering them to customers everywhere.



Durability

At Panasonic we know the importance of a long service life with minimal maintenance. That's why we subject our air conditioners to a wide range of stringent durability tests.



Long-Term Durability Test

To ensure durability and stable operation for many years, we conduct a long-term continuous operation test under conditions that are much more severe than actual operating conditions.



Compressor Reliability Test

After the continuous operation test, we remove the compressor from a selected outdoor unit, disassemble it, and examine the internal mechanisms and parts for potential failure. This helps ensure reliable long-term performance under harsh conditions.



Waterproofing Test

The outdoor unit, which is subject to rain and wind, complies with IPX4 waterproof specifications. Contact sections on printed circuit boards are resin-potted to prevent adverse effects caused by exposure to water (an unlikely occurrence).



A resin-potted circuit board



Testing laboratory Panasonic Gunma, Japan (PAPARS)

International Standard Quality

To uphold the company's reputation around the world, Panasonic strives continuously to offer the highest quality with the lowest possible environment impact.



The strength of the resin material used in a propeller fan is confirmed by a tension test

Reliable Parts That Meet or Exceed Industrial Standards

In every country where they are sold, Panasonic air conditioners comply with all required industrial standards and regulations. In addition, Panasonic conducts stringent testing to ensure the reliability of parts and materials.



RoHS / REACH Compliant Parts

All Panasonic parts and materials comply with Europe's strict RoHS/REACH environmental regulations. During the development and production of parts, stringent inspections are conducted on over 100 materials to ensure that no hazardous substances are included.




Sophisticated Production Process

Panasonic's air conditioner production lines employ state-of-the-art factory automation technologies to ensure products are manufactured efficiently and with uniformly high levels of quality and reliability.

Global Networking of Heating and Cooling Solutions

In any indoor environment, eco-friendly air conditioning plays a vital role in maintaining our health, comfort, and productivity. Whether it's an office, a hotel, or a shopping mall, every building matters. That's why Panasonic has developed energy-efficient large-scale heating and cooling solutions to suit a variety of business applications. As one of the pillars of Panasonic's BtoB operations, our heating and cooling sector provides comprehensive solutions to businesses around the world. Harnessing our advanced technology and extensive on-site expertise, we serve clients in a diverse range of environments throughout the world.

Panasonic air conditioning solutions are designed from the ground up to meet the specific needs of each location, whilst placing a premium on efficiency and reliability. At every stage, we seek to make optimal use of resources and energy to create solutions that benefit the environment.

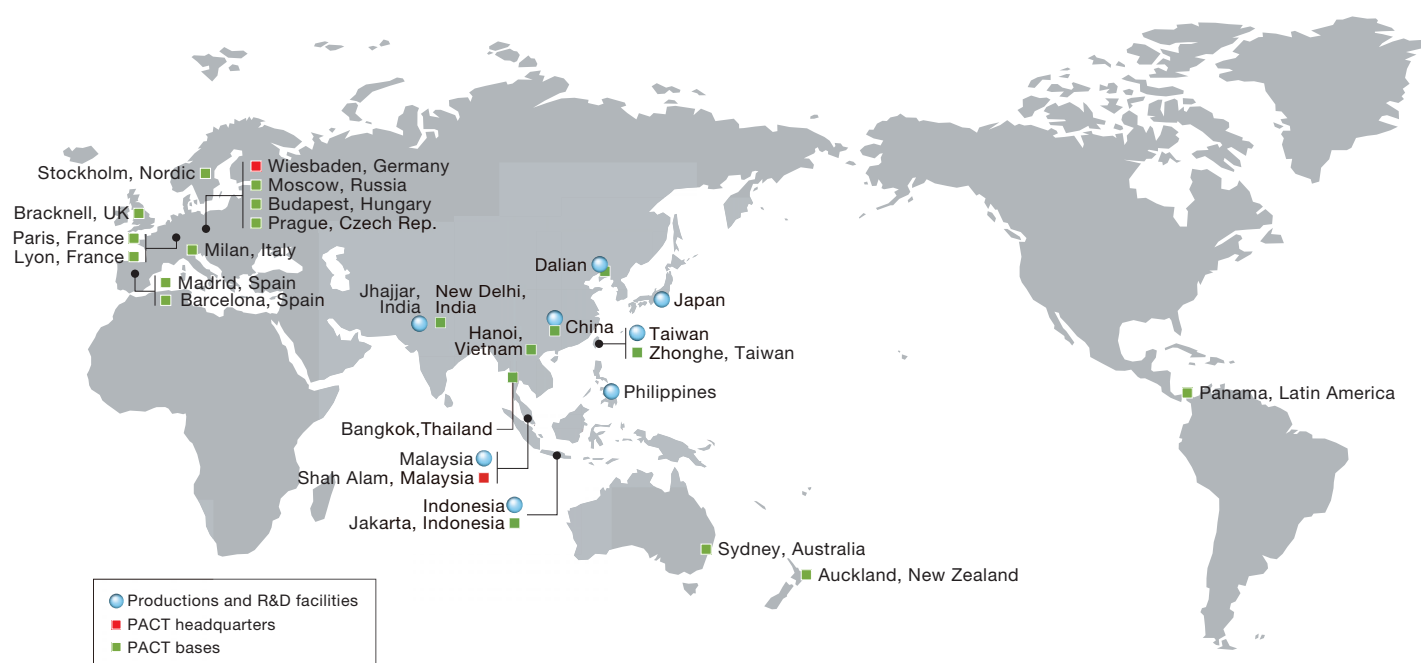

PACT Training Facilities

The 42 Panasonic Air Conditioning Training Centers (PACTs) around the world provide a wide range of support for Panasonic's business-use air conditioning systems. PACT represents Panasonic's unwavering commitment to our sales partners, distributors, and service teams in Europe, Asia, Oceania, and the Americas.



Quality Assurance from Japan to the World

With a diverse network of production and R&D facilities, Panasonic delivers innovative products incorporating cutting-edge technologies that set the standard for air conditioners worldwide. As our business expands globally, we strive to transcend borders with our superior-quality products.

Japan



Heating & Ventilation A/C Company
Headquarters

Established October 2021



Heating & Ventilation A/C Company
Heating & Cooling Solutions Business
Division
Residential Air-Conditioning Business Unit

Established April 1972

- Corporate Engineering Division



Heating & Ventilation A/C Company
Heating & Cooling Solutions Business
Division
Commercial Air-Conditioning Business Unit

Panasonic Appliances Air-Conditioning
and Refrigeration Systems Co., Ltd.

Established July 1959

- Air conditioners
- Cold-chain/refrigeration products

Malaysia



PAPAMY
Panasonic Appliances
Air Conditioning Malaysia
Sdn Bhd.

Established April 1972

- Air conditioners
- Air-to-water heat pumps



PAPARADMY
Panasonic Appliances
Air Conditioning R&D
Malaysia Sdn. Bhd.

Established June 1991

- R&D for air conditioners
- Air-to-water heat pumps



PAPAMY Compressor

Established January 1987

- Rotary compressors for air conditioners



PAPAMY Compressor R&D

Established September 1997

- R&D for rotary compressors

China



PAPAGZ
Panasonic Appliances Air
Conditioning (Guangzhou)
Co., Ltd.

Established June 1993

- Air conditioners



PRDCS
Panasonic R&D Center
Suzhou Co., Ltd.

Established April 2002

- Air conditioners
- R&D for home appliance products



PAPARDL
Panasonic Appliances
Air-Conditioning and
Refrigeration (Dalian) Co.,
Ltd.

Established September 1992

- Air conditioners

Taiwan



PTW
Panasonic Taiwan Co., Ltd.

Established October 1962

- Air conditioners
- Automotive air conditioners
- Home appliance products



PMI
Panasonic Manufacturing
Indonesia

Established September 1970

- Air conditioners
- Home appliance products



PMPC
Panasonic Manufacturing
Philippines Corporation

Established September 1967

- Air conditioners
- Home appliance products



PI
Panasonic India Pvt. Ltd.

Established December 2012

- Room Air conditioners

PACT Headquarters and Bases

EUROPE

Germany Wiesbaden



Nordic Stockholm



Hungary Budapest



Russia (CIS) Moscow



Spain Barcelona



Spain Madrid



France Paris



Italy Milan

Czech Rep. Prague

France Lyon

UK Bracknell

ASIA

Malaysia Shah Alam



Vietnam Hanoi



India New Delhi



Thailand Bangkok

Taiwan Zhonghe

Indonesia Jakarta

China

OCEANIA

Australia Sydney

New Zealand Auckland

AMERICAS

Latin America Panama



Panasonic VRF Global Project References

Panasonic air conditioning systems provides comprehensive solutions to businesses around the world. Harnessing our advanced technology and extensive on-site expertise, we serve clients in a diverse range of environments throughout the world.

HOTEL

Australia Travelodge Hobart



Air Conditioning System:
VRF 3-way FSV MF2 series 8 systems
Indoor Units: 116 units
Cooling Capacity:
302 kW / 86 USRT



Indonesia Patra Jasa Hotel



Air Conditioning System:
VRF 2-way FSV ME1 series 14 systems
Indoor Units: 132 units
Cooling Capacity:
677 kW / 193 USRT



Spain Hotel Claris 5 GL



Air Conditioning System:
VRF 2-way ME1&LE1 series 11 systems
VRF 3-way MF1 series 14 systems
Indoor Units: 233 units
Cooling Capacity: 769 kW / 218 USRT



Spain Monument Hotel



Air Conditioning System:
VRF 2-way ME1 series 4 systems,
VRF 3-way 12 systems
Indoor Units: 171 units
Cooling Capacity:
592 kW / 168.33 USRT



Spain LAVIDA Hotel PGA Catalunya Resort



Air Conditioning System:
VRF 2-way FSV ME2 series 2 systems
Indoor Units: 54 units
Cooling Capacity: 236 kW / 67 USRT

Russia River Park Hotel



Air Conditioning System:
VRF 2-way ME1 series 47 systems
Indoor Units: 96 units
Cooling Capacity: 788 kW / 224 USRT

Germany The LEGOLAND Castle Hotel



Air Conditioning System:
VRF 3-way MF2 series 12 systems
Indoor Units: 144 units
Cooling Capacity:
592 kW / 168.33 USRT



Ireland K Club, Co. Kildare



Air Conditioning System:
VRF 3-way FSV MF2 series 10 systems
Indoor Units: 70 units
Cooling Capacity: 200 kW / 56.87 USRT

OFFICE

Malaysia Gapruna project



Air Conditioning System:
VRF 2-way FSV ME1 series 109 systems
Indoor Units: 537 units
Cooling Capacity:
5,370 kW / 1,526 USRT



Malaysia Plaza 33 Office Block A



Air Conditioning System:
VRF 2-way FSV ME1 series 99 systems
Indoor Units: 153 units
Cooling Capacity:
3,667 kW / 1,042 USRT



Thailand Areeya



Air Conditioning System:
VRF 2-way FSV ME1 series 19 systems
Single split system 67 systems
Indoor Units: 85 units
Cooling Capacity:
1,519 kW / 432 USRT



HongKong King Yip Road



Air Conditioning System:
VRF FSM LA1 series 136 systems
Indoor Units: 294 units
Cooling Capacity:
2,108 kW / 599 USRT



England Soapworks



Air Conditioning System:
VRF 3-way MF2 series 77 systems
with ERV 167 systems



Spain PTA Malaga



Air Conditioning System:
VRF 2-way ME1 series 20 systems
Indoor Units: 74 units
Cooling Capacity:
908 kW / 258 USRT



Russia Russian Government Building



Air Conditioning System:
VRF 2-way ME1 series 42 systems
Indoor Units: 277 units
Cooling Capacity:
2,045 kW / 581 USRT

New Zealand IAG Christchurch



Air Conditioning System:
VRF 3-PIPE FSV MF2 series: 25 systems
Indoor Units: 132 units
Cooling Capacity:
976 kW / 278 USRT



RETAIL

Italy Le Centurie CENTRO COMMERCIALE



Air Conditioning System:
VRF 3-way MF1 series
18 systems
Indoor Units: 57 units
Cooling Capacity:
656 kW / 186 USRT



India Sai Aarav Motors, Mehsana



Air Conditioning System:
VRF 2-way FSV ME1 series 3 systems
Indoor Units: 19 units
Cooling Capacity: 156 kW / 44 USRT

Russia Sun City Mall



Air Conditioning System:
VRF 2-way ME1 series
47 systems
VRF 3-way 12 systems
Indoor Units: 283 units
Cooling Capacity:
1,605 kW / 456 USRT



SCHOOL

United States Shippensburg University



Air Conditioning System:
VRF 3-Way MF1 series
55 systems
Indoor Units: 530 units
Cooling Capacity:
1,498 kW / 426 USRT



SCHOOL

Malaysia Xiamen University



Air Conditioning System:
VRF FSV Systems 110 systems
Indoor Units: 1,349 units
Cloud adapter: CZ-CFUSCC1 17pcs

Russia Technopark of Nobosibirsk Academgorodok



Air Conditioning System:
VRF 2-way ME1 series 38 systems,
VRF 3-way 12 systems
Indoor Units: 234 units
Cooling Capacity:
1,487 kW / 422 USRT



HOSPITAL

Indonesia Bekasi Hospital



Air Conditioning System:
VRF 2-way FSV ME1 series
42 systems
Indoor Units: 283 units
Cooling Capacity:
1,834 kW / 524 USRT



Indonesia Persada Hospital



Air Conditioning System:
VRF 2-way FSV ME1 series
21 systems
Indoor Units: 116 units
Cooling Capacity:
989 kW / 281 USRT



HOSPITAL

France Clinique Dentaire Abtlis (Dental Clinic)



Air Conditioning System:
mini VRF 2-way mini FSV LE1 series 3 systems
Cooling Capacity:
36.3 kW / 10.3 USRT

China Star River Group Luxury Condominium



Air Conditioning System:
VRF Master series 966 systems
Indoor Units: 3,948 systems
Cooling Capacity:
16,737 kW / 4,755 USRT



Singapore Punggol Eco-Town



Air Conditioning System:
Inverter multi-split
room air conditioner
Indoor Units:
Wall mounted S series (with ECOAVI)
Control System: Panasonic HEMS



Hong Kong Gloucester Road Project



Air Conditioning System:
VRF FSM LA1 series 67 systems
Twenty series 105 systems
Indoor Units: 255 units
Cooling Capacity: 1,391 kW / 395 USRT

Hong Kong The Green Project



Air Conditioning System:
VRF FSM LA1 series 239 systems
Twenty series 538 systems
Indoor Units: 999 units
Cooling Capacity:
6,425 kW / 1,825 USRT



India Royal Orchids Eco-Green Homz



Air Conditioning System:
VRF 2-way FSV ME1 series
22 systems
Indoor Units: 139 units
Cooling Capacity:
802 kW / 228 USRT



India Heera Windfaire



Air Conditioning System:
VRF 2-way FSV ME1 series 96 systems,
VRF 3-way 12 systems
Indoor Units: 479 units
Cooling Capacity: 2,184kW / 620 USRT

Panama Mosaic Building PANAMA PACIFICO



Air Conditioning System:
VRF 2-way FSV LE1 series 156 systems
Indoor Units: 357 units
Cooling Capacity: 2,338 kW / 664 USRT